

# KZE Series

- Newly innovative electrolyte is employed to minimize impedance
- Endurance with ripple current: 2,000 to 5,000 hours at 105°C
- Non solvent resistant type
- RoHS2 Compliant




## SPECIFICATIONS

Items	Characteristics									
Category	-40 to +105°C									
Temperature Range	-40 to +105°C									
Rated Voltage Range	6.3 to 100V <sub>dc</sub>									
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)									
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)									
Dissipation Factor (tan δ)	Rated voltage (V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V	63V	80V	100V
	tan δ (Max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.08
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)									
Low Temperature Characteristics (Max. Impedance Ratio)	Z (-25°C) / Z (+20°C)	2max.								
	Z (-40°C) / Z (+20°C)	3max.								
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for the specified period of time at 105°C.									
	Time	φ 5 & φ 6.3 : 2,000hours	φ 8 : 3,000hours	φ 10 : 4,000hours	φ 12.5 to φ 18 : 5,000hours					
	Capacitance change	≤ ±25% of the initial value								
	D.F. (tan δ)	≤ 200% of the initial specified value								
	Leakage current	≤ The initial specified value								
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.									
	Capacitance change	≤ ±25% of the initial value								
	D.F. (tan δ)	≤ 200% of the initial specified value								
	Leakage current	≤ The initial specified value								


## DIMENSIONS [mm]

- Terminal Code : E

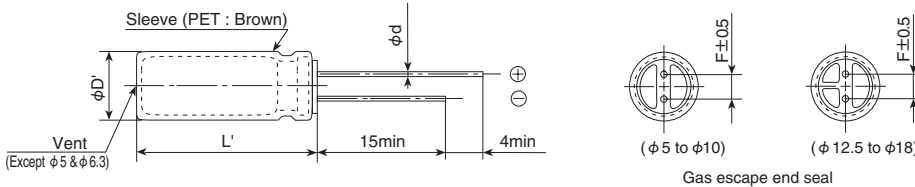

φD	5	6.3	8	10, 12.5	16, 18
φd	0.5	0.5	0.6	0.6	0.8
F	2.0	2.5	3.5	5.0	7.5
φD'	φ D+0.5max.				
L'	L+1.5max.				

## PART NUMBERING SYSTEM

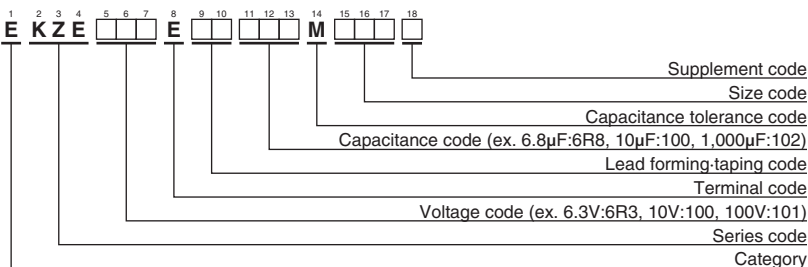

Please refer to "Product code guide (radial lead type)"

**◆ STANDARD RATINGS**

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Impedance (Ω max./100kHz)		Rated ripple current (mA rms/105°C, 100kHz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Impedance (Ω max./100kHz)		Rated ripple current (mA rms/105°C, 100kHz)	Part No.	
			20°C	-10°C						20°C	-10°C			
6.3	150	5×11	0.30	1.0	250	EKZE6R3E□□151ME11D	35	270	8×20	0.041	0.13	1,250	EKZE350E□□271MH20D	
	330	6.3×11	0.13	0.41	405	EKZE6R3E□□331MF11D		330	10×16	0.038	0.12	1,430	EKZE350E□□331MJ16S	
	560	8×11.5	0.072	0.22	760	EKZE6R3E□□561MHB5D		470	10×20	0.023	0.069	1,820	EKZE350E□□471MJ20S	
	820	8×15	0.056	0.17	995	EKZE6R3E□□821MH15D		560	10×25	0.022	0.066	2,150	EKZE350E□□561MJ25S	
	1,000	10×12.5	0.053	0.16	1,030	EKZE6R3E□□102MJC5S		680	12.5×20	0.021	0.053	2,360	EKZE350E□□681MK20S	
	1,200	8×20	0.041	0.13	1,250	EKZE6R3E□□122MH20D		1,000	12.5×25	0.018	0.045	2,770	EKZE350E□□102MK25S	
	1,200	10×16	0.038	0.12	1,430	EKZE6R3E□□122MJ16S		1,200	12.5×30	0.016	0.041	3,290	EKZE350E□□122MK30S	
	1,500	10×20	0.023	0.069	1,820	EKZE6R3E□□152MJ20S		1,200	16×20	0.018	0.045	3,140	EKZE350E□□122ML20S	
	2,200	10×25	0.022	0.066	2,150	EKZE6R3E□□222MJ25S		1,500	12.5×35	0.015	0.039	3,400	EKZE350E□□152MK35S	
	3,300	12.5×20	0.021	0.053	2,360	EKZE6R3E□□332MK20S		1,800	16×25	0.016	0.043	3,460	EKZE350E□□182ML25S	
	3,900	12.5×25	0.018	0.045	2,770	EKZE6R3E□□392MK25S								
	4,700	12.5×30	0.016	0.041	3,290	EKZE6R3E□□472MK30S								
10	100	5×11	0.30	1.0	250	EKZE100E□□101ME11D	50	22	5×11	0.34	1.18	238	EKZE500E□□220ME11D	
	220	6.3×11	0.13	0.41	405	EKZE100E□□221MF11D		56	6.3×11	0.14	0.50	385	EKZE500E□□560MF11D	
	470	8×11.5	0.072	0.22	760	EKZE100E□□471MHB5D		100	8×11.5	0.074	0.22	724	EKZE500E□□101MHB5D	
	680	8×15	0.056	0.17	995	EKZE100E□□681MH15D		120	8×15	0.061	0.18	950	EKZE500E□□121MH15D	
	680	10×12.5	0.053	0.16	1,030	EKZE100E□□681MJC5S		150	10×12.5	0.061	0.18	979	EKZE500E□□151MJC5S	
	1,000	8×20	0.041	0.13	1,250	EKZE100E□□102MH20D		180	8×20	0.046	0.14	1,190	EKZE500E□□181MH20D	
	1,000	10×16	0.038	0.12	1,430	EKZE100E□□102MJ16S		220	10×16	0.042	0.12	1,370	EKZE500E□□221MJ16S	
	1,200	10×20	0.023	0.069	1,820	EKZE100E□□122MJ20S		270	10×20	0.030	0.090	1,580	EKZE500E□□271MJ20S	
	1,500	10×25	0.022	0.066	2,150	EKZE100E□□152MJ25S		330	10×25	0.028	0.085	1,870	EKZE500E□□331MJ25S	
	2,200	12.5×20	0.021	0.053	2,360	EKZE100E□□222MK20S		470	12.5×20	0.027	0.068	2,050	EKZE500E□□471MK20S	
	3,300	12.5×25	0.018	0.045	2,770	EKZE100E□□332MK25S		560	12.5×25	0.023	0.059	2,410	EKZE500E□□561MK25S	
	3,900	12.5×30	0.016	0.041	3,290	EKZE100E□□392MK30S		680	12.5×30	0.021	0.052	2,860	EKZE500E□□681MK30S	
16	56	5×11	0.30	1.0	250	EKZE160E□□560ME11D	63	15	5×11	0.88	3.5	165	EKZE630E□□150ME11D	
	120	6.3×11	0.13	0.41	405	EKZE160E□□121MF11D		33	6.3×11	0.35	1.4	265	EKZE630E□□330MF11D	
	330	8×11.5	0.072	0.22	760	EKZE160E□□331MHB5D		56	8×11.5	0.22	0.88	500	EKZE630E□□560MHB5D	
	470	8×15	0.056	0.17	995	EKZE160E□□471MH15D		82	8×15	0.16	0.64	665	EKZE630E□□820MH15D	
	470	10×12.5	0.053	0.16	1,030	EKZE160E□□471MJC5S		82	10×12.5	0.11	0.44	690	EKZE630E□□820MJC5S	
	680	8×20	0.041	0.13	1,250	EKZE160E□□681MH20D		120	8×20	0.12	0.48	820	EKZE630E□□121MH20D	
	680	10×16	0.038	0.12	1,430	EKZE160E□□681MJ16S		120	10×16	0.076	0.31	950	EKZE630E□□121MJ16S	
	1,000	10×20	0.023	0.069	1,820	EKZE160E□□102MJ20S		180	10×20	0.056	0.23	1,150	EKZE630E□□181MJ20S	
	1,200	10×25	0.022	0.066	2,150	EKZE160E□□122MJ25S		180	12.5×16	0.072	0.29	1,150	EKZE630E□□181MK16S	
	1,500	12.5×20	0.021	0.053	2,360	EKZE160E□□152MK20S		220	10×25	0.046	0.19	1,350	EKZE630E□□221MJ25S	
	2,200	12.5×25	0.018	0.045	2,770	EKZE160E□□222MK25S		270	12.5×20	0.041	0.13	1,500	EKZE630E□□271MK20S	
	2,700	12.5×30	0.016	0.041	3,290	EKZE160E□□272MK30S		390	12.5×25	0.031	0.093	1,900	EKZE630E□□391MK25S	
25	47	5×11	0.30	1.0	250	EKZE250E□□470ME11D	80	68	10×12.5	0.17	0.66	480	EKZE800E□□680MJC5S	
	100	6.3×11	0.13	0.41	405	EKZE250E□□101MF11D		100	10×16	0.11	0.47	600	EKZE800E□□101MJ16S	
	220	8×11.5	0.072	0.22	760	EKZE250E□□221MHB5D		120	10×20	0.084	0.34	800	EKZE800E□□121MJ20S	
	330	8×15	0.056	0.17	995	EKZE250E□□331MH15D		150	10×25	0.069	0.28	900	EKZE800E□□151MJ25S	
	330	10×12.5	0.053	0.16	1,030	EKZE250E□□331MJC5S		150	12.5×16	0.11	0.34	750	EKZE800E□□151MK16S	
	470	8×20	0.041	0.13	1,250	EKZE250E□□471MH20D		220	12.5×20	0.062	0.18	1,100	EKZE800E□□221MK20S	
	470	10×16	0.038	0.12	1,430	EKZE250E□□471MJ16S		330	12.5×25	0.047	0.14	1,250	EKZE800E□□331MK25S	
	680	10×20	0.023	0.069	1,820	EKZE250E□□681MJ20S		330	16×20	0.048	0.15	1,350	EKZE800E□□331ML20S	
	820	10×25	0.022	0.066	2,150	EKZE250E□□821MJ25S		390	12.5×30	0.042	0.13	1,500	EKZE800E□□391MK30S	
	1,000	12.5×20	0.021	0.053	2,360	EKZE250E□□102MK20S		470	12.5×35	0.036	0.11	1,650	EKZE800E□□471MK35S	
	1,500	12.5×25	0.018	0.045	2,770	EKZE250E□□152MK25S		470	16×25	0.038	0.12	1,700	EKZE800E□□471ML25S	
	1,800	12.5×30	0.016	0.041	3,290	EKZE250E□□182MK30S		470	18×20	0.045	0.14	1,500	EKZE800E□□471MM20S	
35	33	5×11	0.30	1.0	250	EKZE350E□□330ME11D	80	560	12.5×40	0.032	0.095	1,800	EKZE800E□□561MK40S	
	56	6.3×11	0.13	0.41	405	EKZE350E□□560MF11D		680	16×31.5	0.032	0.095	1,850	EKZE800E□□681MLN3S	
	150	8×11.5	0.072	0.22	760	EKZE350E□□151MHB5D		680	18×25	0.036	0.11	1,750	EKZE800E□□681MM25S	
	220	8×15	0.056	0.17	995	EKZE350E□□221MH15D								
	220	10×12.5	0.053	0.16	1,030	EKZE350E□□221MJC5S								

□ : Enter the appropriate lead forming or taping code.

◆ STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap (μF)	Case size φD×L(mm)	Impedance (Ω max./100kHz)		Rated ripple current (mA <sub>rms</sub> /105°C, 100kHz)	Part No.	WV (V <sub>dc</sub> )	Cap (μF)	Case size φD×L(mm)	Impedance (Ω max./100kHz)		Rated ripple current (mA <sub>rms</sub> /105°C, 100kHz)	Part No.
			20°C	-10°C						20°C	-10°C		
80	820	16×35.5	0.029	0.086	2,000	EKZE800E□□821MLP1S	100	150	12.5×20	0.062	0.18	1,100	EKZE101E□□151MK20S
	820	18×31.5	0.030	0.090	1,900	EKZE800E□□821MMN3S		220	12.5×25	0.047	0.14	1,250	EKZE101E□□221MK25S
	1,000	16×40	0.027	0.081	2,200	EKZE800E□□102ML40S		220	16×20	0.048	0.15	1,350	EKZE101E□□221ML20S
	1,000	18×35.5	0.027	0.081	2,200	EKZE800E□□102MMP1S		270	12.5×30	0.042	0.13	1,500	EKZE101E□□271MK30S
	1,200	18×40	0.026	0.077	2,700	EKZE800E□□122MM40S		330	12.5×35	0.036	0.11	1,650	EKZE101E□□331MK35S
100	6.8	5×11	1.4	5.6	125	EKZE101E□□6R8ME11D		330	16×25	0.038	0.12	1,700	EKZE101E□□331ML25S
	15	6.3×11	0.57	2.3	205	EKZE101E□□150MF11D		330	18×20	0.045	0.14	1,500	EKZE101E□□331MM20S
	27	8×11.5	0.36	1.4	355	EKZE101E□□270MHB5D		390	12.5×40	0.032	0.095	1,800	EKZE101E□□391MK40S
	39	8×15	0.25	1.0	450	EKZE101E□□390MH15D		470	16×31.5	0.032	0.095	1,850	EKZE101E□□471MLN3S
	47	10×12.5	0.17	0.66	480	EKZE101E□□470MJC5S		470	18×25	0.036	0.11	1,750	EKZE101E□□471MM25S
	56	8×20	0.19	0.76	565	EKZE101E□□560MH20D		560	16×35.5	0.029	0.086	2,000	EKZE101E□□561MLP1S
	68	10×16	0.11	0.47	600	EKZE101E□□680MJ16S		560	18×31.5	0.030	0.090	1,900	EKZE101E□□561MMN3S
	82	10×20	0.084	0.34	800	EKZE101E□□820MJ20S		680	16×40	0.027	0.081	2,200	EKZE101E□□681ML40S
	100	12.5×16	0.11	0.34	750	EKZE101E□□101MK16S		680	18×35.5	0.027	0.081	2,200	EKZE101E□□681MMP1S
	120	10×25	0.069	0.28	900	EKZE101E□□121MJ25S		820	18×40	0.026	0.077	2,700	EKZE101E□□821MM40S

□ □ : Enter the appropriate lead forming or taping code.

◆ RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

Capacitance(μF)	Frequency(Hz)			
	120	1k	10k	100k
6.8 to 180	0.40	0.75	0.90	1.00
220 to 560	0.50	0.85	0.94	1.00
680 to 1,800	0.60	0.87	0.95	1.00
2,200 to 3,900	0.75	0.90	0.95	1.00
4,700 to	0.85	0.95	0.98	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Aluminium Electrolytic Capacitors - Radial Leaded](#) *category:*

*Click to view products by* [Nippon Chemi-Con](#) *manufacturer:*

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A7226M8](#) [B41044A7157M6](#) [NCD681K10KVY5PF](#)

[NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#) [NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#)

[NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#)

[ESMG160ETD102MJ16S](#) [ESX472M16B](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [B41793A9108Q1](#) [UVX1V101KPA1FA](#)

[UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#)

[NRE-S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#)

[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#)

[NEV4700M35HI](#) [NEV4.7M100BA](#) [NEV47M16BA](#) [NEV47M50CB-BULK](#)