











Heavy Duty Side Cutter VDE

- Cutting edges inductively hardened
- Precision cutting edge for piano wire (D2 quality)
- Power transmission with optimum leverage for easy and effortless work
- Handles with ergonomically shaped SoftGripp multi-component safety sleeves according to DIN EN/IEC 60900
- SoftGripp handles with SystemSocket for holding optionally available accessories, e.g. the easily attached SystemClip for fall protection
- Made of special tool steel, forged, oil-hardened

SKU: 137-49-VDE-240

Related Products Art-Nr.: 819-1 Art-Nr.: 819-2 Art-Nr.: 819-3 System Clip with System Clip with System Clip with Opening Spring, Opening Spring, Lanyard Size 1+2 Size 3+4 Art-Nr.: 819-4 Art-Nr.: 820-12 E-Detector **Tool Tethering** System



Safety Notes



For working at or close to electrical parts please observe safety regulations for electrical works and additional national safety regulations.

Check that insulation is not damaged each time before using the tools. Do not use damaged tools anymore. Keep your safety tools clean and dry. Ensure that the workplace where you are working on live equipment is clean and tidy. Use protective clothing and safety equipment (eg. safety gloves, cover clothes and safety sleeves), especially when working in narrow areas.

Electrical work (worked carried out on electrical devices an systems) must be either conducted by a qualified electrician or supervised and checked by one.



Use tools for indicated purposes only.

Before using the cutting tools please wear body protection such as safety mask, safety glasses and hand protection.

Beware of wire ends flying off!

General Information

Finish 49 VDE

The pliers, cutters and wrenches in the 49 VDE series are subjected to regular inspections by VDE, the Association for Electrical, Electronic and Information Technologies, to ensure the very high standards of safety that are required when working on "live" electrical components. To enable strain-free, concentrated working over longer periods of time, the handles are non-slip and safe thanks to the SoftGripp sleeves, on the one hand, and fit snugly in the hand due to the ergonomically designed soft zones, on the other. The pliers, cutters & wrenches themselves are drop-forged tool steel, special tool steel or chrome vanadium steel and are oil hardened. The cutting edges of all these cutting tools are induction-hardened to ensure they are able to cope with the needs of professionals in industry and the trades.





Better safe than sorry.

Electricians put their faith in their tools daily. Electricity is always a potential hazard. Whether they are cutting cables to size, fitting socket outlets or configuring switch cabinets, they need tools they can rely on without fail. When an electrician picks up a set of VDE tools made by NWS, he or she is handling quality tools subjected to stringent testing for practical, hands-on applications in electrical jobs. This is, after all, what professional working, health & safety are all about.



Safety testing method according to IEC 60900

- Visual check and check of measurements: single check of the lettering on the basis tool as well as on the insulation.
- Check of resistance under hot and cold conditions: under normal temperatures of the surroundings (23° C) as well as under low temperatures (-25° C) on three different positions easy to hurt.
- Single voltage check: check of the electrical insulating characteristics by putting on a 10 KV voltage in a water bath for three minutes and measuring the deflecting electricity.
- Pressure check check of puncture: storage of tools in a warming box for 2 hours at the temperature of 70° C putting on a 5 KV Voltage for three minutes and raising a power of 20 N on the insulation.
- Check of the adhesive power of the insulation: storage of tools in a warming box for 168 h at a temperature of 70° C raising a power of 500 N for three minutes on the area between the conductive part and the insulation.
- Check of fire risk: raising a flame on the insulation for 10 seconds.




SoftGripp with SystemSocket

When we developed our handle sleeves, the focus was on functionality, safety and environmental compatibility. The SoftGripp sleeves provide firm but comfortable grip as you work thanks to the triple-component texture. The tailored shape of the handles and the combination of different, environmentally compatible materials makes the tool rest more snugly in the hand. The ergonomically designed SoftGripp, with its multi-zone blend of handle textures, coupled with the optional spring-loaded opening mechanism, ensure strain-free working. To ensure maximum safety, the tools feature an optimised shape to prevent hands slipping off the tool and the SystemClip, which secures the tools when working on a roof, scaffolding or construction site. The SystemClip, which is easily attached on the SystemSocket, creates a quick, secure connection between the tool and the strap and features an integrated pocket for storing the opener spring.



Downloads

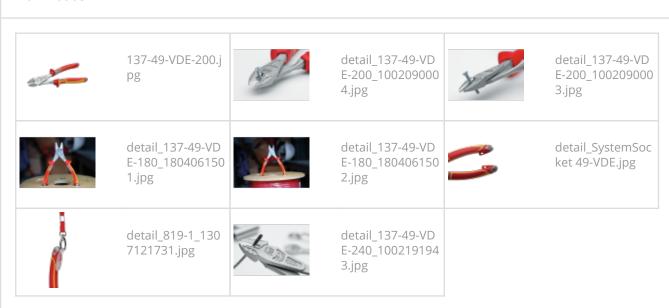

Technical Data

137-	49-VDE-240	
4 Þ	Length - mm	240
خ ⊭	Length - in	9 1/2
D<	Cutting edge shape	M
•	Medium hard wire (750 N / mm²) nail, wire nail - cutting capacity - Ø mm	4,5
•	Hard wire (1800 N / mm²) wire rope fiber, steel rope - cutting capacity - Ø mm	3,5
•	Piano wire (2300 N / mm²) Spring steel wire - Cutting capacity - Ø mm	3
DIN	DIN standards - National, European and worldwide	DIN ISO 5749
EE	Design	&
HRC	Cutting edge hardness - HRC	61 - 63
2,7	Weight - g	415
9	Packing unit	6
	Barcode	40 03758 53739 8



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pliers & Tweezers category:

Click to view products by NWS manufacturer:

Other Similar products are found below:

0031 32750 PN-5050/38D PG-TP-30D PG-DP-18-N G77015 4-1532129-2 77 12 115 0037 T0058765801 571 76C 37 31 125 RX 8130 37 33 125 DRP10N 32 11 135 36 12 130 0036 64 11 115 0032 6231-08 PN 5050/19D PNI 5000 TP 5000/15D TR 5000 PR TR 58 R A D 00 20 08 US2 13 01 614 87 28 250 SBA INCP8 30993 011820101 011830101 011910110 003780032 003780041 134-69-160 134-69-180 135-49-VDE-190 137-49-VDE-180 137-49-VDE-200 137-49-VDE-240 137-69-240 137-69-240 138-49-VDE-200 138-69-200 140-49-VDE-170 140-49-VDE-205