ON Semiconductor

Is Now




To learn more about onsemi™, please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,



Strata Enabled FAN6500XX 65V Sync Buck EVB User Guide





Strata Enabled FAN6500XX 65 V Sync Buck EVB

Table of Contents

INTRODUCTION	
Features	
Applications	
USER GUIDE	
Hardware Setup	
User Interface	
Telemetry. Controls, and Functionality	
OFF	

Introduction

The STR-FAN6500XX-GEVB provides an easy to use evaluation platform within the Strata Development Environment for the FAN65004B, FAN65004C, FAN65005A, and FAN65008B synchronous buck regulators from ON Semiconductor. Strata gives the developer access to any collateral one may need, including datasheets, BOMs and schematics, as well as providing a user interface for testing the performance of the FAN6500XX series of parts. This document will provide instructions on how to use the evaluation board.

Features

- Vin range from 4.5 V to 65 V
- Fixed frequency voltage mode PWM control with input voltage feed-forward
- Adjustable switching frequency from 100 kHz to 1 MHz
- Selectable CCM PWM mode of PFM Mode for light loads
- Wide array of protection circuits including OCP, TSD, OVP, UVP and SCP
- Continuous output current depending on specific part:
 - FAN65004B 6 A
 - FAN65004C 6 A
 - \circ FAN65005A 8 A
 - FAN65008B 10 A

Applications

- High Voltage POL Module
- Telecommunications: Base Station Power Supplies
- Networking: Computing, Battery Management Systems, USB-PD
- Industrial Equipment: Automation, Power Tools, Slot Machines

User Guide


This section will explain how to use the Strata Enabled STR-FAN6500XX EVB in a step-by-step manner and will cover both the hardware required as well as how to use the User Interface (UI) in Strata. Please ensure that the latest version of Strata is installed before connecting to the board. The latest version can be downloaded from the ON Semiconductor website.

Hardware Setup

The hardware required to use the Strata Enabled STR-FAN6500XX EVB are a computer (with Windows), a power supply, and a load. Sense lines are recommended if available with equipment being used. Follow the steps below to get started:

- 1. Connect the EVB to a computer using the mini USB connector J23 on the bottom of the board.
- 2. Connect the power supply to the input of the board using the banana jacks J19 (positive terminal) and J21 (negative terminal).
- 3. Connect the load to the output of the board using the banana jacks J18 (positive terminal) and J20 (negative terminal).


An example picture of the setup can be found below:

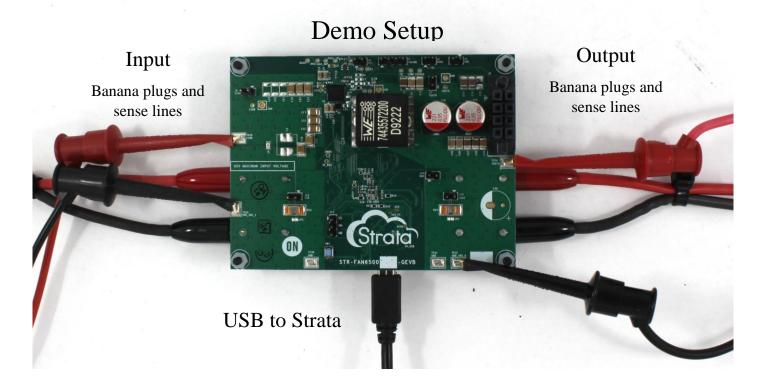

User Interface

The UI within the Strata app will allow the user to control and monitor the evaluation board without requiring other lab equipment or training. The steps below include the details on how to start the Strata application.

- 1. First, download and install the most recent version of Strata. It can be found here.
- 2. Open the Strata app. Login and the home screen will appear.
- 3. The app will automatically detect the device and will bring up the UI for the board that is plugged in.
- 4. The round button with a question mark in the top right corner is the Help button, and it will show the user what everything on the UI is doing.
- 5. The UI features telemetry for basic measurements such as input and output voltage and current, as well as control over the output parameters as well as some of the FAN6500XX features.

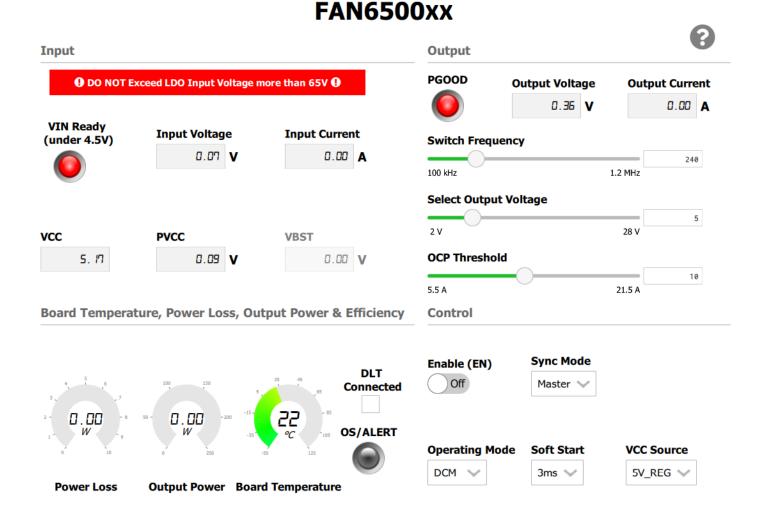

Telemetry. Controls, and Functionality

This section will discuss some UI elements specific to this design.

- 1. VBST This box displays a calculated value for the bootstrap pin, which is calculated based on the input voltage, output voltage, and the VCC voltage. The calculation does not hold in DCM, so the box is disabled while operating in DCM.
- 2. OCP Threshold slider This slider adjust the OCP level of the buck regulator. The FAN6500XX series used peak current detection for the OCP and SCP detection. Therefore, the OCP value on the slider may not match exactly with the measured OCP value.
- 3. DLT Connected checkbox The Dynamic Load Tool (DLT) is an ON Semi board which provides a platform for consistent AC measurements. When connected, the return current will not flow through the output current sense amplifiers, hence some of the UI elements will be disabled.
- 4. Sync Mode This combo box sets the part to be in master or slave mode. In master mode, the switching frequency is generated internally in the FAN6500XX based on the resistor tied to the RT pin. In master mode, the switching frequency is sent out via the SYNC pin. In slave mode, the SYNC pin becomes an input, and the FAN6500XX will match the switching frequency seen on the SYNC pin.
- 5. Operating Mode This combo box switches between Discontinuous Mode (DCM) and Forced Continuous Conduction Mode (FCCM). In DCM, the part will skip pulses in order to save power at lower output power levels, and in FCCM the part will operate with a fixed frequency.
- 6. Soft Start This combo box allows the user to specify soft start times be adding or removing a parallel capacitor to the soft start pin.
- 7. VCC Source This combo box allows the user to specify the source of the VCC voltage. The PVCC option supplies the VCC pin with the internally generated 5V rail, while the USB 5V option supplied the VCC pin with 5V from USB.

OTP note

As of 1/6/2021 the FAN65004B, FAN65005A, and FAN65008B parts have OTP disabled. This error is being corrected in the next production batch, with a TBD date.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is as such not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and should as such only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

The board is delivered "AS IS" and without warranty of any kind including, but not limited to, that the board is production-worthy, that the functions contained in the board will meet your requirements, or that the operation of the board will be uninterrupted or error free. ON Semiconductor expressly disclaims all warranties, express, implied or otherwise, including without limitation, warranties of fitness for a particular purpose and non-infringement of intellectual property rights.

ON Semiconductor reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by ON Semiconductor shall not constitute any representation or warranty by ON Semiconductor, and no additional obligations or liabilities shall arise from ON Semiconductor having provided such information or services.

The boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. Should you purchase or use the board for any such unintended or unauthorized application, you shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

FCC WARNING – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by ON Semiconductor to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

ON Semiconductor does not convey any license under its patent rights nor the rights of others.

LIMITATIONS OF LIABILITY: ON Semiconductor shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if ON Semiconductor is advised of the possibility of such damages. In no event shall ON Semiconductor's aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

PUBLICATION ORDERING INFORMATION

LITERATURE FULLFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA

Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

ON Semiconductor Website:

https://www.onsemi.com/

Order Literature:

https://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Management IC Development Tools category:

Click to view products by ON Semiconductor manufacturer:

Other Similar products are found below:

EVB-EP5348UI DA9063-EVAL BQ24155EVM BQ25010EVM REG710EVM-5 TPS54980EVM-022 TPS65010EVM-230 BQ24120EVM-001 BQ24212EVM-678 BQ3050EVM-001 ISL9520EVAL1Z UCC3809EVM LM3691TL-1.2EV/NOPB SOT23-3EV-VREG SOT89-3EV-VREG TPS2458EVM TPS54229EEVM-056 TPS54329EEVM-056 MAX8556EVKIT MAX20012EVKIT# MAX15005AEVKIT+ S6SBP203A8FVA1001 TPS652510EVM STEVAL-ISA047V1 ISL8502AEVAL1Z ISL8009AEVAL1Z TPS76901EVM-127 FRDM-HB2001-EVM BM6208FS-EVK-001 LM5115EVAL LP5900TL-2.5EV DRI0043 7E.12.8.230.0002 KITPF8100FRDMEVM NCP10671B05GEVB MAX20073EVKIT# EVB-EN6337QA AP3125AEV1 NIV6350MT2GEVB XMCA1 RD33771-48VEVM EVKT-MPM3695-10-A DEMO200W12VDCLLC SAMPLEBOXILD8150TOBO1 MAX18066EVKIT# AP61100Z6-EVM AP62300WU-EVM KIT8020-CRD-8FF1217P-1 KITPF8121FRDMEVM EV2174C-G-00A