Type ACBP-12-H / ACBP-24-H Auto Reset Circuit Breaker Automotive Type I Plastic With Horizontal Bracket



www.optifuse.com


(619) 593-5050


Specifications:


Auto Reset Type Circuit Breaker Voltage: 12V or 24V Amperage: 10A, 15A, 20A, 25A, 30A, 35A, 40A, 50A IP Rating: 63 Terminals: Battery – Copper Plate (0.58"), Auxiliary – Zinc Plate (0.66") Conforms to American National Standard SAE J553 Cover Material: PBT Operating Temperature: -10° F ~ 150° F Storage Temperature: -20° F ~ 200° F **Current Rating:**

Rating	Open Time
$100\% \pm 1.5\%$	> 30 Min
$135\% \pm 1.5\%$	< 30 Min
$200\% \pm 1.5\%$	< 1 Min

Mechanical Dimensions: Inches [mm]

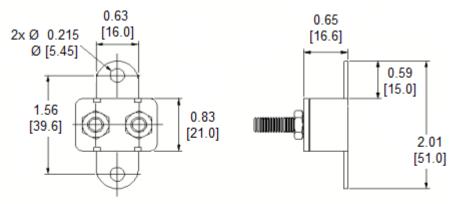







-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

Note: All specifications subject to change without notice.

Rev D 10/2017 - Page: 1/1 Code Y01-01H

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Automotive Fuses category:

Click to view products by Optifuse manufacturer:

Other Similar products are found below :

 HBO-10
 HBO-100
 HBO-150
 HBO-40
 HBO-50
 AFX-150
 AT-10
 AT-30
 AT-5
 ATM-10ID
 ATM-4LP
 ACL-50
 AFX-50
 299080
 HBO-15

 AT-20
 AT-3
 0287015
 142.7010.5502
 FMM-15
 0MIN015.HXGLO
 2010T1.25A250V
 0695030.PXPS
 0695040.PXPS
 0297003.WXT

 0MIN025.HXGLO
 0MIN030.HXGLO
 0695025.PXPS
 0695015.PXPS
 0695050.PXPS
 0695060.PXPS
 MRBF-075
 0200300
 02400106P

 0297002.WXT
 0297004.WXT
 0297010.WXT
 0297015.WXT
 0297020.WXT
 0297030.WXT
 029707.5WXT
 0602925

 0602930
 0602935
 0602950
 0602960
 0611100
 0611125