

# Type FSD

## Fast Acting Glass Tube Fuse

### 5 x 20 mm



www.optifuse.com (619) 593-5050

#### Agency Standards and Listings:



#### Interrupt Ratings:

35A or 10In whichever is greater (125mA-16A)  
@ 250V AC

#### Time Characteristics

Rated Current	210%		275%		400%		1000%
	MAX	MIN	MAX	MIN	MAX	MAX	
125mA ~100mA	30 min	10 ms	500 ms	3 ms	100 ms	20 ms	
125mA~6.3A	30 min	50 ms	2 sec	10 ms	300 ms	20 ms	
8A~10A	30 min	50 ms	2 sec	10 ms	400 ms	40 ms	
12A~16A	30 min	50 ms	3 sec	10 ms	400 ms	50 ms	
>16A	30 min	100 ms	6 sec	20 ms	600 ms	60 ms	

#### Operating Temperature:

-55°C to +125°C


#### Material:

Glass Body/Nickel Plated Brass Caps  
Lead Wire Ø0.65mm Diameter – 8A and less  
Ø0.8mm Diameter – 8A ~ 15A  
Ø1.0mm Diameter – over 15A

Cartridge Part number	Axial Lead Part number	Ampere Rating	Nominal Melting I <sup>2</sup> t A <sup>2</sup> Sec	Voltage Rating									
				CCC	CQC	SEMKO	VDE	BSI	PSE	KC	IMQ		
FSD-125mA	FSD-P-125mA	125mA	0.0085										
FSD-160mA	FSD-P-160mA	160mA	0.0099										
FSD-200mA	FSD-P-200mA	200mA	0.0256	•		•	•	•	•	•	•	•	•
FSD-250mA	FSD-P-250mA	250mA	0.0272	•		•	•	•	•	•	•	•	•
FSD-315mA	FSD-P-315mA	315mA	0.0820	•		•	•	•	•	•	•	•	•
FSD-400mA	FSD-P-400mA	400mA	0.1224	•		•	•	•	•	•	•	•	•
FSD-500mA	FSD-P-500mA	500mA	0.2050	•		•	•	•	•	•	•	•	•
FSD-630mA	FSD-P-630mA	630mA	0.5505	•		•	•	•	•	•	•	•	•
FSD-750mA	FSD-P-750mA	750mA	0.7780										
FSD-800mA	FSD-P-800mA	800mA	0.5747	•		•	•	•	•	•	•	•	•
FSD-1A	FSD-P-1A	1A	1.240	•		•	•	•	•	•	•	•	•
FSD-1.25A	FSD-P-1.25A	1.25A	1.810	•		•	•	•	•	•	•	•	•
FSD-1.6A	FSD-P-1.6A	1.6A	3.200	•		•	•	•	•	•	•	•	•
FSD-2A	FSD-P-2A	2A	7.256	•		•	•	•	•	•	•	•	•
FSD-2.5A	FSD-P-2.5A	2.5A	13.69	•		•	•	•	•	•	•	•	•
FSD-3.15A	FSD-P-3.15A	3.15A	22.33	•		•	•	•	•	•	•	•	•
FSD-4A	FSD-P-4A	4A	35.19	•		•	•	•	•	•	•	•	•
FSD-5A	FSD-P-5A	5A	58.83	•		•	•	•	•	•	•	•	•
FSD-6.3A	FSD-P-6.3A	6.3A	104.6	•		•	•	•	•	•	•	•	•
FSD-8A	FSD-P-8A	8A	185.6		•	•	•		•	•			
FSD-10A	FSD-P-10A	10A	244.4		•	•	•		•	•			
FSD-12 A	FSD-P-12A	12A	428.5							•			
FSD-12.5A	FSD-P-12.5A	12.5A	473.1		•	•	•		•				
FSD-15A	FSD-P-15A	15A	838.8							•			
FSD-16A	FSD-P-16A	16A	894.7		•	•	•						
FSD-20A	FSD-P-20A	20A	1877										

250V

#### Mechanical Dimensions: Inches [mm]

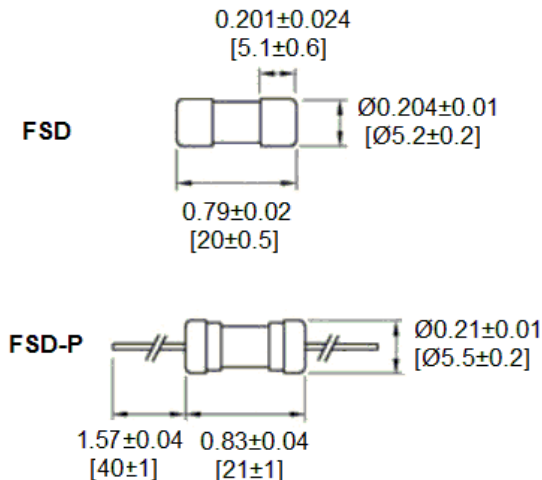


Note: All specifications subject to change without notice.


**Type FSD**  
**Fast Acting Glass Tube Fuse**  
**5 x 20 mm**



www.optifuse.com (619) 593-5050

**Part Number FSD**  
**TIME CURRENT CURVES**

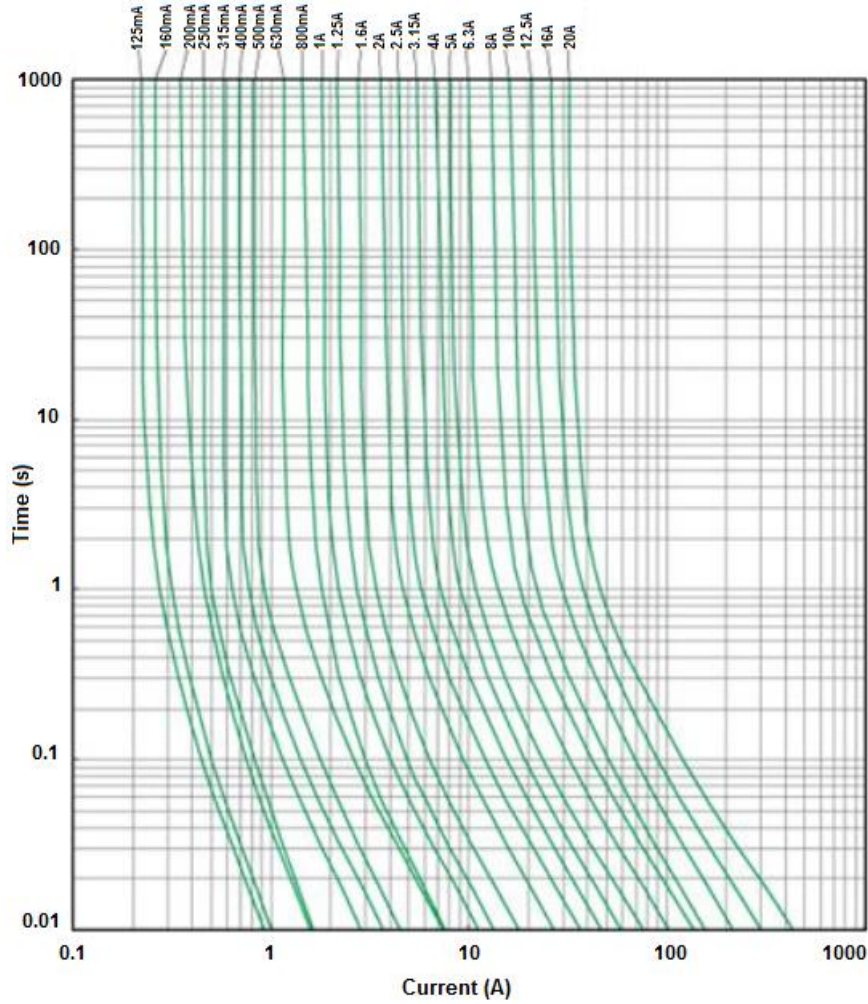

<p><b>Warning:</b></p> 	<p>-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.          -Glass Fuse device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.          -Avoid contact of Glass Fuse device with chemical solvent. Prolonged contact will damage the device performance.</p>
------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Note: All specifications subject to change without notice.

Rev E 02/2019 - Page: 2/2  
 Code: H01-01H

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cartridge Fuses](#) category:*

*Click to view products by [Optifuse](#) manufacturer:*

Other Similar products are found below :

[5TT3A-R](#) [MBO-20](#) [MDM-4/10](#) [MDQ-V-15/100](#) [MDX-1-6/10](#) [MDX-2](#) [MDX-3-2/10](#) [MDX-6-1/4](#) [FLSR-15](#) [FLSR-30](#) [FRS-1-1/4](#) [FRS-1-6/10](#) [FRS-4/10](#) [H362003](#) [ABC-2](#) [1/2A](#) [12C10X38GI](#) [AGC-1-1/2RX](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [AGY-50](#) [15019-G](#) [MSL-1-1/2](#) [MSL-1-1/4](#) [MSL-1/2](#) [MSL-1/4](#) [MSL-3](#) [MSL-3/4](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#) [BK1-S505-1-R](#) [BK1-S506-3-15-R](#) [BK/MDM-15](#) [BK/MDM-3/4](#) [1C10X38AM](#) [S501-V-10A](#) [S505-V-500MA](#) [SEF-1697-1-002](#) [301030](#) [303030](#) [FLA10](#) [FLA-4/10](#) [FLNR-5](#) [20.0M6.3X32F](#) [GBB-17-1/2](#) [301001](#) [301020](#) [311008](#)