

Type LPM-01 In-Line Fuse Holder Mini Auto Blade Fuses Splashproof Type




www.optifuse.com (619) 593-5050

Ratings:

- Fuse Type:** Mini Auto Blade – APMs, ANMs
- Electrical Rating:** 58V
- Temperature Rating:** -40° C to 85° C
- Body:** PVC
- Contacts:** Brass
- IP Rating:** IP65
- Wire Type:** UL1015 rated to FT1 (VW1) – Stranded
- Wire Gauges:** See Wire Gauge Table
- Wire Colors:** Red, Yellow, Orange, Black
- Body colors:** Black
- Standard Wire Length:** 4 inches

Available in various wire gauges and lengths, and wire colors.
Bare Copper wire also available.
Contact factory for those not listed above.

Mechanical Dimensions: Inches [mm]

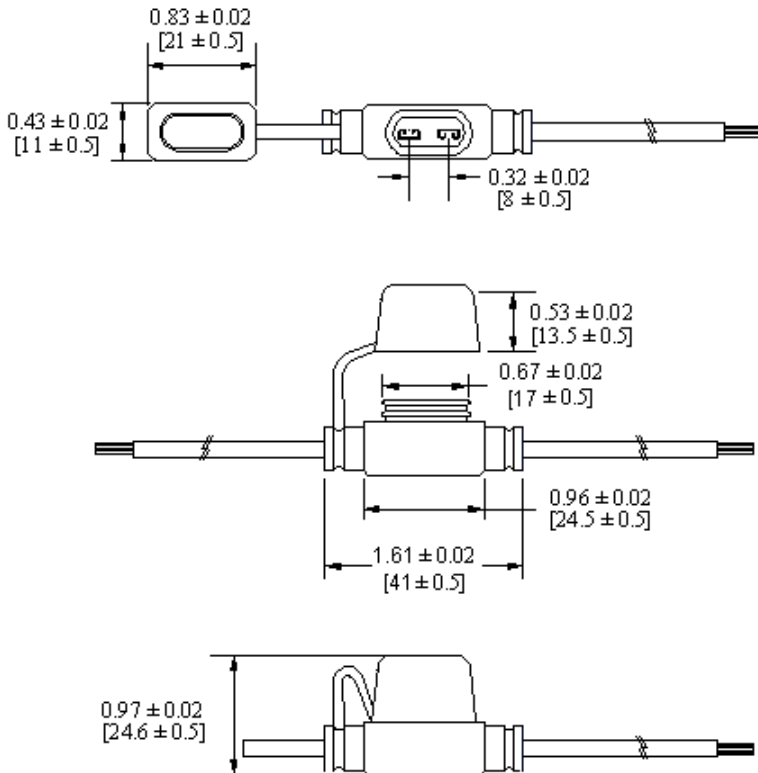


Part number format

LPM-01B-##Z

Where ## = Wire gauge
Z = Wire color (**R, Y, OR, B**)

Wire Gauge	Max. Amperage
10 AWG	40 A
12 AWG	30 A
14 AWG	20 A
16 AWG	15 A
18 AWG	10 A
20 AWG	7.5 A

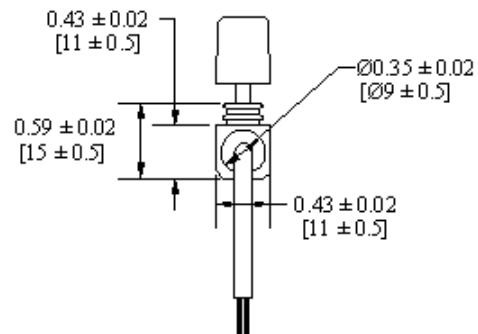

Warning:



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.
- Not designed for prolonged liquid exposure or submersible applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Optifuse](#) manufacturer:

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)
[R6J30A3S](#) [HFH-1](#) [RF30A1S](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-](#)
[FUSE](#) [HMG-241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-](#)
[CCHH](#) [R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#)