

Type LPR-03 In-Line Fuse Holder Automotive Blade Fuses - APRs Splashproof Type




www.optifuse.com (619) 593-5050

Ratings:

- Fuse Type:** Automotive Blade – APRs, ANRs
- Electrical Rating:** 30A 58VAC
- The Ambient Temperature:** -40°C to +85°C
- Body:** PVC
- Cap:** Splashproof type
- IP Rating:** IP65
- Wire Sizes:** # 10, # 12, # 14, #16, #18 AWG, UL 1015
- Standard Wire Colors:** Red, Black
- Standard Body Colors:** Red, Black
- Wire Length:** 12 inches – End to End Loop

Available in various wire gauges and lengths, and body and wire colors. Contact factory for those not listed above.

Mechanical Dimensions: Inches [mm]

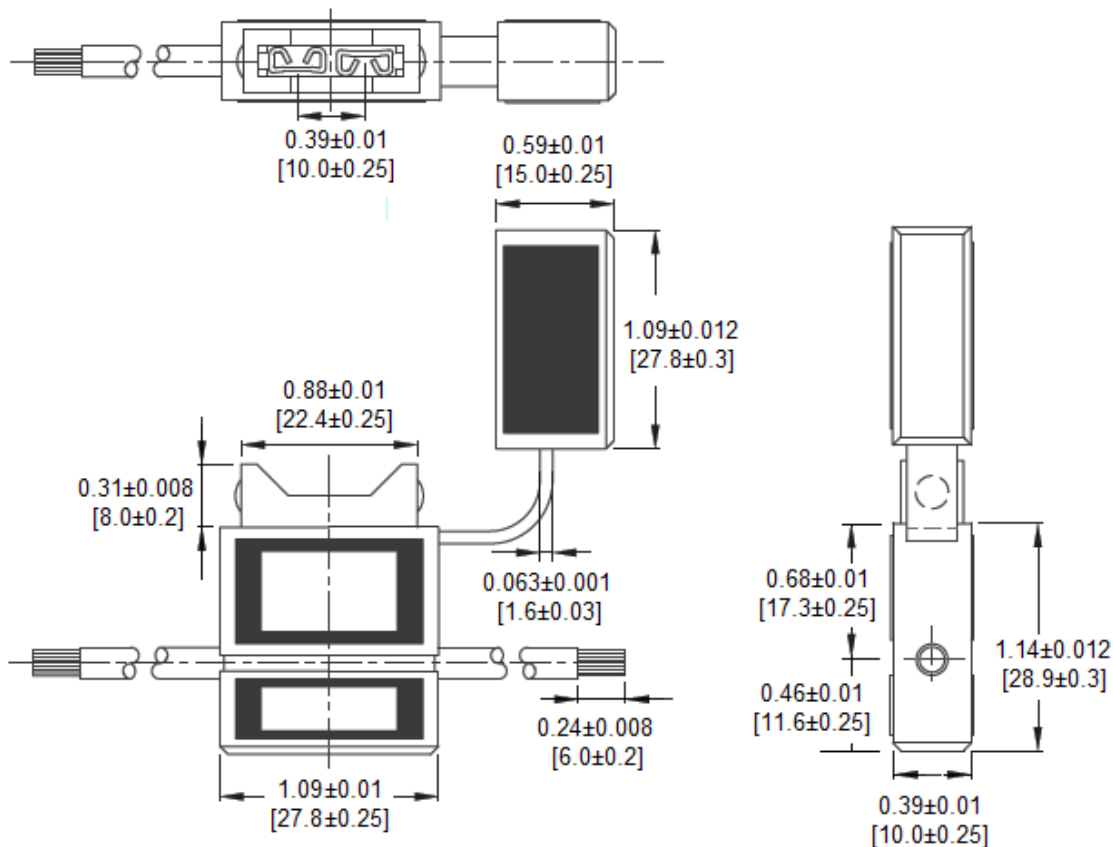

Part number format

LPR-03X-##Z

Where **X** = Body color - Red, Black
= Wire gauge
Z = Wire color (**R** or **B**)

Wire Gauge	Max. Amperage
10 AWG	40 A
12 AWG	30 A
14 AWG	20 A
16 AWG	15 A
18 AWG	10 A

<p>Warning:</p>	<ul style="list-style-type: none"> -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame. -Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance. -Not designed for prolonged liquid exposure or submersible applications.
------------------------	--

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Optifuse](#) manufacturer:

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)
[R6J30A3S](#) [HFH-1](#) [RF30A1S](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-](#)
[FUSE](#) [HMG-241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-](#)
[CCHH](#) [R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#)