


■ **Features**

- High Luminous LEDs
- 3mm Cylindrical Flat Top Standard Directivity
- UV Resistant Epoxy
- Color Diffused / W&M: White Diffused
- AC LED

■ **Applications**

- Toys
- Audio
- Games
- Other Lighting


■ **Outline Dimension**

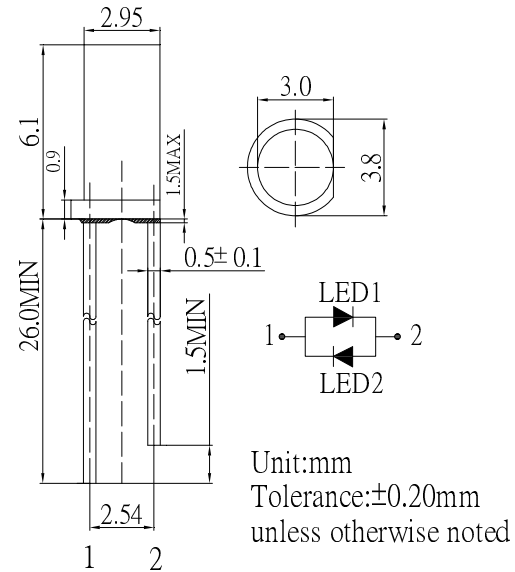

■ **Absolute Maximum Rating (Ta=25°C)**

Item	Symbol	Value		Unit
		W/M/B/PG	YG/Y/O/R	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current*	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	102	78	mW
Operating Temperature	T _{opr}	-30 ~ +85		°C
Storage Temperature	T _{stg}	-40 ~ +100		°C
Lead Soldering Temperature	T _{sol}	260°C/5sec		-

■ **Directivity**

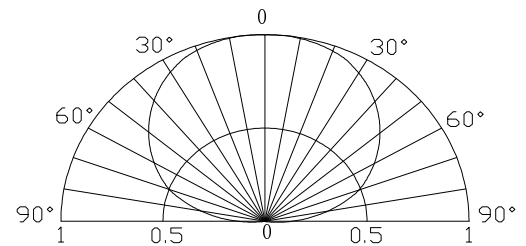

*Pulse width Max.10ms Duty ratio max 1/10

Part Number	Color			V _F (V)			I _v (mcd)			λD(nm)/CCT(K)			θ1/2(deg)
				Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I _F =20mA			I _F =20mA						
OSWWD23NE2A	White	W		2.7	2.9	3.4	750	1120	-	CCT: 8500-18000K			140
OSMMD23NE2A	Warm White	M	■	2.7	2.9	3.4	750	1120	-	CCT:2700-3300K			140
OSBBS23NE4A	Blue	B	■	2.7	2.9	3.4	330	500	-	465	465	475	140
OSPPD23NE4A	Pure Green	PG	■	2.7	2.9	3.4	750	1120	-	520	525	530	140
OSGGH23NE4A	Yellow Green	YG	■	1.8	2.1	2.6	68	100	-	565	570	575	140
OSYYR23NE4A	Yellow	Y	■	1.8	2.1	2.6	150	220	-	585	590	595	140
OSOOJ23NE4A	Orange	O	■	1.8	2.1	2.6	150	220	-	600	605	610	140
OSRRR23NE4A	Red	R	■	1.8	2.1	2.6	150	220	-	620	625	630	140

*1 Tolerance of measurements of Domi. wavelength is ±1nm
*3 Tolerance of measurements of luminous intensity is ±15%

*2 Tolerance of measurements of chromaticity coordinates is +10%
*4 Tolerance of measurements of forward voltage is ±0.1V

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optosupply](#) manufacturer:

Other Similar products are found below :

[OSB5SA5111A-CRLED16](#) [OSB5SA83C1A](#) [OSX10201-YGR1](#) [OS5YKP5111A](#) [OS5YPM8131A](#) [OS5YAA5HA4D-1-ST](#) [OS6OGA5B61P](#)
[OSW5DK5A31A-CRLED18](#) [OSY5PA5A31A-1MA](#) [OSB4YU39B4B](#) [OSO5JA3FE1B-12V](#) [OKLEDT30606A](#) [OSPT9054X3A](#)
[OKLEDT5050RPW](#) [OSL10564-IB](#) [OSO5PA58A1B-12V](#) [OKLEDT8050G5W](#) [OKLEDT8050RPW](#) [OSGGD251A5A](#) [OKLEDT3050RBW](#)
[OSYYP251A5A](#) [OKLEDT5050B5W](#) [OSB5DA3HA1F](#) [OSYBP2A131A](#) [OKLEDT3050RBV](#) [OKLEDT3050WAW](#) [OSL12306-16-IRA](#)
[OSY5MP5A34A-6.8HZ](#) [OKLEDT5050RBV](#) [OKLEDT8050RBV](#) [OKLEDT3050RPW](#) [OKLEDT5050WAV](#) [OSWRP23962B](#)
[OKLEDT5050TAW](#) [OKLEDT8050G5V](#) [OKLEDT8050WAW](#) [OSY5MSA131A](#) [OSXD2201-AGA](#) [OKLEDT3050RPV](#) [OKLEDT5050RBW](#)
[OSL10601-IRA](#) [OSCM4TS4C1A](#) [OSM5XAHEE1E](#) [OS6OGA3131P](#) [OSL10564-IYG](#) [OSO5PA56A1A-CRLED14](#) [OSRGH23NE2A](#)
[OST1MCA132A](#) [OKLEDT31206A](#) [OSPTYJ53X2T](#)