

## OTi DALI DIM 1-4CH D

CV Dimmers with DALI



### Product family features

- Intelligent digital dimmer (DALI) with constant output voltage
- Dimming range: 0...100 %
- Device fits also for special applications where dimming below 1 % is required

### Product family benefits

- Very precise dimming thanks to digital light control

## Areas of application

- Suitable for indoor installations
- Separate installation (ceiling mounting)


---

## Technical data

### Electrical data

Nominal input voltage	12...48 V
Mains frequency	0 Hz
Nominal output voltage	12...48 V
Nominal output power	240 W
Galvanic isolation	SELV

## Dimensions & weight

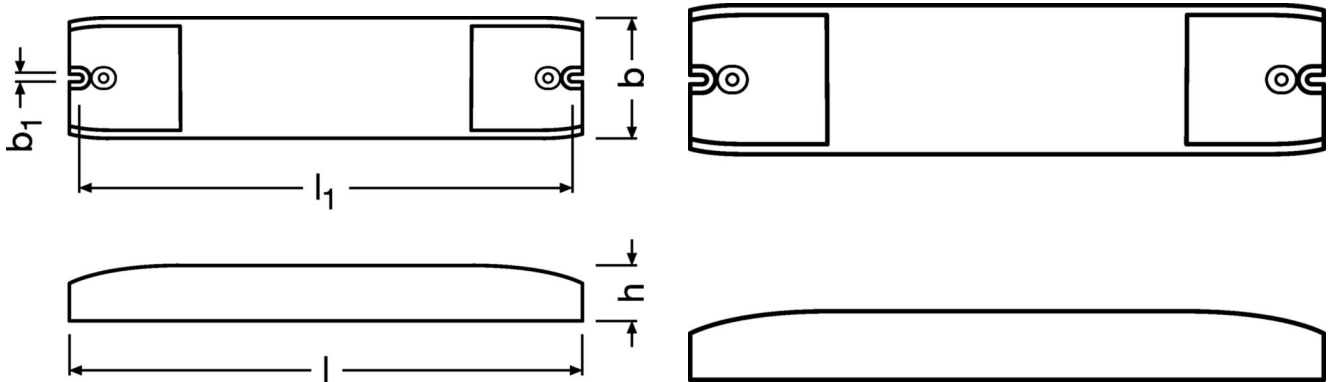

Length	181.0 mm
Width	42.0 mm
Height	20.0 mm
Mounting hole spacing, length	175.5 mm
Cable cross-section, input side	0.5...2.5 mm <sup>2</sup>
Cable cross-section, output side	0.5...2.5 mm <sup>2</sup>
Wire preparation length, input side	5...8 mm
Wire preparation length, output side	5...8 mm
Product weight	86.00 g

## Colors & materials

Casing material	Plastic
-----------------	---------

## Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Maximum temperature at tc test point	60 °C
Max.housing temperature in case of fault	110 °C
Temperature range at storage	-40...+85 °C
Permitted rel. humidity during operation	5...85 % <sup>1)</sup>

1) Maximum 56 days/year at 85 %

## Lifespan

<b>ECG lifetime</b>	50000 h
---------------------	---------

## Capabilities

<b>Dimmable</b>	Yes
<b>Dimming interface</b>	DALI-2 / Corridor / Touch DIM
<b>Dimming range</b>	1...100 %
<b>Dimming method</b>	PWM
<b>Suitable for fixtures with prot. class</b>	I / II
<b>Type of connection, input side</b>	Screw terminal
<b>Type of connection, output side</b>	Screw terminal
<b>Number of channels</b>	4
<b>Overheating protection</b>	Automatic reversible
<b>Short-circuit protection</b>	Automatic reversible
<b>No-load proof</b>	Yes

## Certificates & standards

Approval marks – approval	CE / EAC / RCM / ENEC 05
Standards	Acc. to EC 61347-2-13 / Acc. to EN 62384 / Acc. to EN 55015 / Acc. to EN 61547
Type of protection	IP20
Protection class	II

## Logistical data

Commodity code	85371098990
----------------	-------------

## Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	22-03-2024
Primary Article Identifier	4062172166010
Declaration No. in SCIP database	In work

## Download Data

File		
Certificates	PDF	▶ ENEC certificate OTi DALI DIM 1-4CH D
CAD data 3-dim	Compressed	▶ 3D STEP file
CAD data 3-dim	Compressed	▶ OTi DALI DIM 1-4CH D _ 3D stp file
Mandatory Publications	PDF	▶ OTi DALI DIM 1 4 CH CE 4312383 01 160823
Mandatory Publications	PDF	▶ OTi DALI DIM 1 4 CH UK DoC 4312420 01 180923
User instruction	PDF	▶ OTi DALI DIM 1 4CH D UI

## Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172166010	OTi DALI DIM 1-4CH D	Shipping carton box 20 Pieces	229 x 197 x 133 mm	6.00 dm <sup>3</sup>	2088.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [Osram](#) manufacturer:*

Other Similar products are found below :

[PIFC-K250F](#) [PITB-K222A](#) [AC-A60VD24H2.5](#) [ALD-514012PJ134](#) [PWD-60-1-70-P](#) [ESS030W-1050-21](#) [BPOXL 4-12-035](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [ESS010W-0500-12](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [HVG-240-54AB](#) [OTE 25/220-240/700 PC](#) [OT FIT 30/220-240/700 CS](#) [DAL30W-0600-42-T](#) [HVG-320-48AB](#) [CNB30W-0600-42-CAS](#) [87500757](#) [I-SELECT 2 PLUG 2100MA BL](#) [LCU 48V 75W DC-STR FO](#) [LC 45 W 500-1400 MA FLEXC SC EXC](#) [I-SELECT 2 PLUG 2000MA BL](#) [LC 50/200-350/170 FLEXCC LP SNC3](#) [LCO 14/100-500/38 O4A NF C EXC3](#) [LC 28W 300-700MA 42 FLEXC NF SC EXC3](#) [LC 44/1050/42 FIXC SRL ADV2](#) [LCA 60W 900-1750MA ONE4ALL C PRE](#) [LC 8/180/44 FIXC SR SNC2](#) [LC 19/200-350/54 FLEXC LP SNC4](#) [BXDR-PS-75BS-E116D-01-A](#) [LC 30/500/54 FIXC SR SNC2](#) [LCA 60W 24V ONE4ALL SC PRE SP](#) [LC 60W 75-330MA 310V FLEXC NF H16 EXC4](#) [LC 8/180/42 FIXC PC SR SNC2](#) [LC 10/350/29 FIXC SR SNC2](#) [LC 25/500/43 FIXC SR SNC2](#) [LC 50/100-400/140 PO4A NF H16 PRE3](#) [LC 25/600/42 FIXC SRL ADV2](#) [LCO 24/200-1050/39 NF C ADV3](#) [ELEMENT 35/220...240/900 G3](#) [LC 25W 350-1050MA FLEXC SR EXC](#) [LC 35W 24 ONE4ALL IP PRE](#) [BXDR-PS-25BS-E107D-01-A](#) [LC 17W 250-700MA FLEXC SR EXC](#) [LC 15W 350MA FIXC C SNC](#) [LC 14W 700MA FIXC PC SR SNC2](#) [LC 200W 24V SC SNC](#)