


New
BK200A
4/5A size (HR17/43)

Old
(HHR200A)

Standard type

N type

■ Dimensions (with tube)

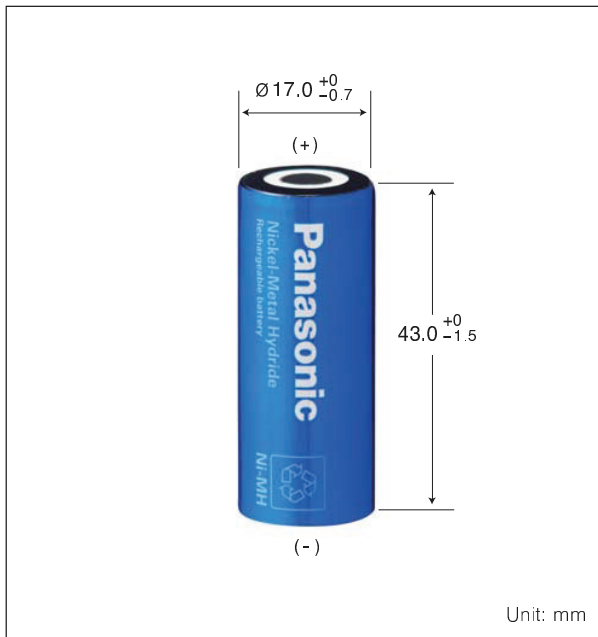


■ Specifications

Diameter	17.0 +0 / -0.7 mm
Height	43.0 +0 / -1.5 mm
Approximate Weight	32 g



Nominal Voltage		1.2 V	
Discharge ^{*1} Capacity	Average ^{*2}	2040 mAh	
	Rated (min.)	2000 mAh	
Approx. Internal impedance at 1000Hz at charged state.		20 mΩ	
Charge	Standard	200 mA X 16 hrs.	
	Rapid ^{*3}	1700 mA X 1.4 hrs.	
Ambient Temperature	Charge	Standard	0 °C to 45 °C
		Rapid	0 °C to 40 °C
	Discharge		-10 °C to 65 °C
	Storage	<1 year	-20 °C to 35 °C
<6 months		-20 °C to 45 °C	
<1 month		-20 °C to 55 °C	
<1 week		-20 °C to 65 °C	

*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.
 *2 For reference only.
 *3 Need specially designed control system. Please contact Panasonic for details.

■ Typical charge characteristics

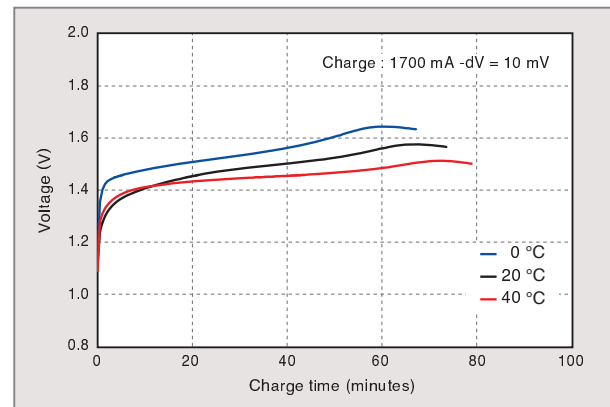

■ Typical discharge characteristics

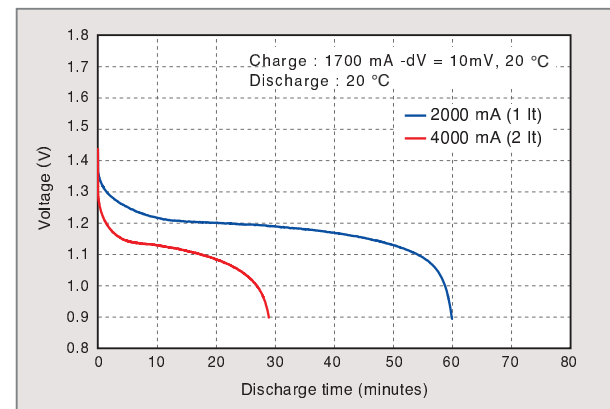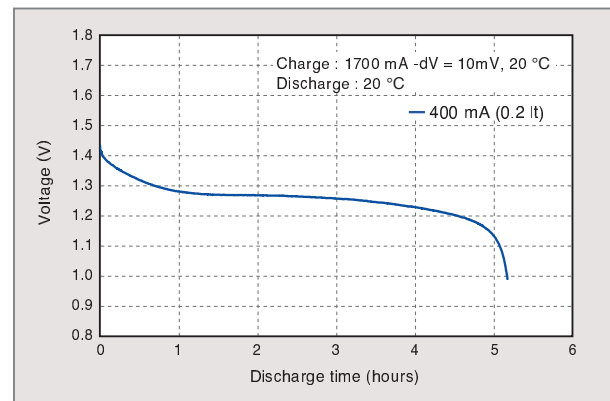

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Control Switches](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[80887-99](#) [80932-99](#) [86855-00](#) [88814-30](#) [1424293-1](#) [HW4S-2TC10](#) [89721-12](#) [89804-08](#) [SSN](#) [RL01801](#) [ASD2L20N-LVO](#) [50051857-17](#)
[50099156-001-05](#) [51.155R-15200](#) [50058920-26](#) [CP-FA51](#) [CP-FA49](#) [ACCU-SC/L-3000](#) [PP9M](#) [PP87G](#) [PP86GA](#) [PP71G](#) [PP70G](#) [PP6G](#)
[PP62G](#) [PP58BL](#) [PP56G](#) [PP86GB](#) [PP77GA](#) [PP76G](#) [PP4M](#) [PP47G](#) [PP46G](#) [PP41M](#) [PP40G](#) [PP32G](#) [RD-20](#) [PP23M](#) [PP12G](#) [PORTAPRO](#)
[POM-2708](#) [PNB-2005](#) [3057.0012](#) [CV-075](#) [CV-140SB](#) [CV-150](#) [CV-150S](#) [214X20XK](#) [CV-180](#) [CV-200MB](#)