


New
BK60AAAH
AAA size (HR11/45)

Old
(HHR60AAAH)

High temperature & long life type



■ Dimensions (with tube)

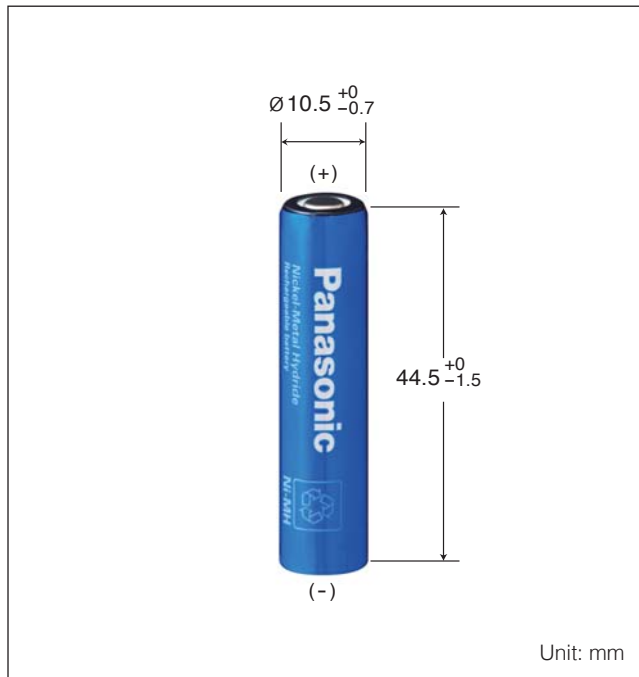

■ Specifications

Diameter	10.5 +0 / -0.7 mm
Height	44.5 +0 / -1.5 mm
Approximate Weight	13 g



Nominal Voltage		1.2 V	
Discharge ^{*1} Capacity	Average ^{*2}	550 mAh	
	Rated (min.)	500 mAh	
Approx. Internal impedance at 1000Hz at charged state.		35 mΩ	
Charge	Standard	50 mA X 16 hrs.	
	Rapid ^{*3}	250 mA X 2.4 hrs.	
	Low rate	25 mA X 32 hrs. 17 mA X 48 hrs.	
Ambient Temperature	Charge	Standard	-10 °C to 60 °C
		Rapid	
		Low rate	
Discharge		-10 °C to 60 °C	
Storage	<1 year	-20 °C to 35 °C	
	<6 months	-20 °C to 45 °C	
	<1 month	-20 °C to 55 °C	
	<1 week	-20 °C to 65 °C	

*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.
*2 For reference only.
*3 Need specially designed control system. Please contact Panasonic for details.


Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

■ Typical charge characteristics

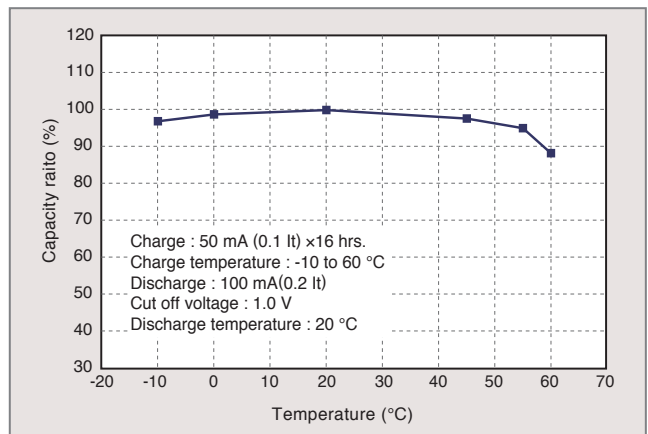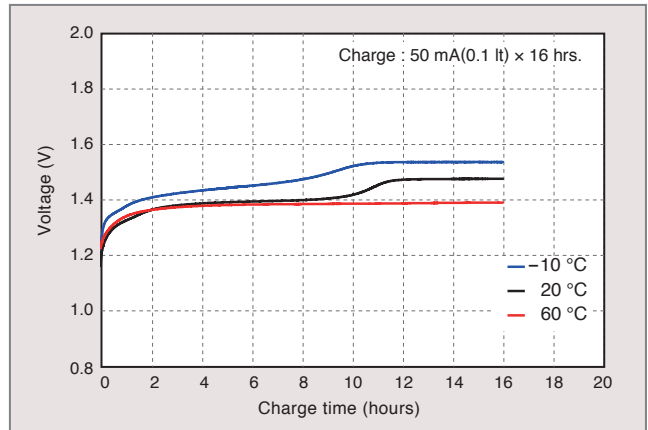

■ Typical discharge characteristics

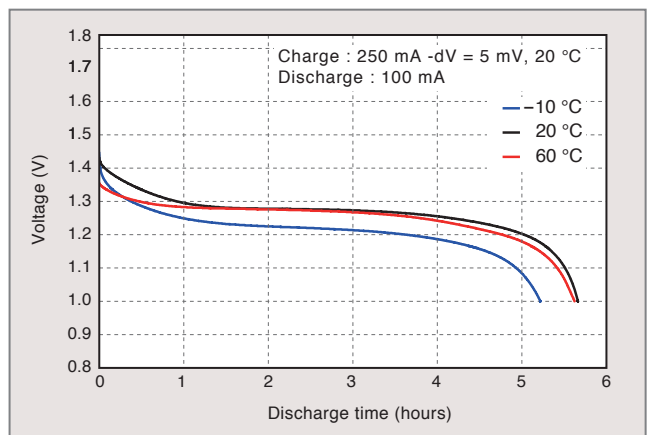

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [NiMH - Nickel Metal Hydride Battery](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[HHR-75AAA/B](#) [BK-110FHB01](#) [NH1250AA](#) [NH-3000SC](#) [HHR200SCP](#) [NH-2100A](#) [NH-600AAA](#) [NH-B320](#) [HHR-26SCP Y01](#) [NH-1500AA](#)
[NH-1250AAL](#) [NH-7000D](#) [BK-200AAB9B](#) [BK-250AB01](#) [BK-80AAAB9B](#) [HHR-200AB20](#) [HHR-210AB18](#) [HHR-25SCHY03](#) [HHR-](#)
[300CHA03](#) [HHR-30SCP Y20](#) [HHR-370AHA05](#) [HHR-60AAAHB2](#) [HHR-75AAAB5B](#)