


Panasonic
ideas for life

**4 A CAPACITY,
THE VARIETY OF CONTACT
ARRANGEMENTS**

S RELAYS



mm inch

FEATURES

- The variety of contact arrangements
2 Form A 2 Form B, 3 Form A 1 Form B, 4 Form A
- Latching types available
- High sensitivity in small size 100 mW pick-up and 200 mW nominal operating power
- High shock and vibration resistance
Shock: 50 G Vibration: 10 to 55 Hz at double amplitude of 3 mm .118 inch

- Wide switching range From 100 μ A 100 mV DC to 4 A 250 V AC
- Low thermal electromotive force
Approx. 3 μ V
- Dual-In-Line packaging arrangement

SPECIFICATIONS

Contacts

Arrangement		2 Form A 2 Form B, 3 Form A 1 Form B, 4 Form A	
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)		50 m Ω	
Initial contact pressure		Approx. 12 g .42 oz	
Contact material		Gold clad silver alloy	
Electrostatic capacitance		Approx. 3pF	
Thermal electromotive force (at nominal coil voltage)		Approx. 3 μ V	
Rating (resistive)	Nominal switching capacity	4 A 250 V AC, 3 A 30 V DC	
	Maximum switching power	1,000 VA, 90 W	
	Maximum switching voltage	250 V AC, 30 V DC (48 VDC at less than 0.5 A)	
	Max. switching current	4 A (AC), 3 A (DC)	
	Min. switching capacity**1	100 μ A 100 m V DC	
Expected life (min. operations)	Mechanical (at 50 cps)	10 ⁸	
	Electrical (at 20 cpm)	4 A 250 V AC	10 ⁵
		3 A 30 V DC	2 \times 10 ⁵

Coil (polarized) (at 20°C 68°F)

Single side stable	Minimum operating power	Approx. 100 mW
	Nominal operating power	Approx. 200 mW
Latching	Minimum set and reset	Approx. 100 mW
	Nominal set and reset	Approx. 200 mW

Notes:

**1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

Remarks

- * Specifications will vary with foreign standards certification ratings.
- *1 Measurement at same location as "Initial breakdown voltage" section
- *2 Detection current: 10mA
- *3 Excluding contact bounce time
- *4 Half-wave pulse of sine wave: 11ms; detection time: 10 μ s
- *5 Half-wave pulse of sine wave: 6ms
- *6 Detection time: 10 μ s
- *7 Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (see catalog).

Characteristics (at 25°C 77°F 50% Relative humidity)

Max. operating speed		20 cpm for maximum load, 50 cps for low-level load (1 mA 1 V DC)
Initial breakdown voltage*2	Between open contacts	750 Vrms
	Between contact sets	1,000 Vrms
	Between contacts and coil	1,500 Vrms
Operate time*3 (at nominal voltage)(at 20°C)		Max. 15 ms (Approx. 8 ms)
Release time (without diode)*3 (at nominal voltage)(at 20°C)		Max. 10 ms (Approx. 5 ms)
Set time*3 (latching) (at nominal voltage)(at 20°C)		Max. 15 ms (Approx. 8 ms)
Reset time*3 (latching) (at nominal voltage)(at 20°C)		Max. 15 ms (Approx. 8 ms)
Initial contact bounce, max.		1 ms
Temperature rise (at nominal voltage)(at 20°C)		Max. 35°C with nominal coil voltage and at maximum switching current
Shock resistance	Functional*4	Min. 490 m/s ² {50 G}
	Destructive*5	Min. 980 m/s ² {100 G}
Vibration resistance	Functional*6	176.4 m/s ² {18 G}, 10 to 55 Hz at double amplitude of 3 mm
	Destructive	235.2 m/s ² {24 G}, 10 to 55 Hz at double amplitude of 4 mm
Conditions for operation, transport and storage*7 (Not freezing and condens- ing at low temperature)	Ambient temp.	-40°C to +65°C -40°F to +149°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 8 g .28 oz


TYPICAL APPLICATIONS

Telecommunications equipment, data processing equipment,
facsimiles, alarm equipment, measuring equipment.


Schematic (Bottom view)

Single side stable
Deenergized position


2a2b



3a1b




4a




2 coil latching

Diagram shows the "reset" position when terminals 6 and 7 are energized. Energize terminals 1 and 12 to transfer contacts.


2a2b



3a1b




4a




REFERENCE DATA

1. Maximum switching power

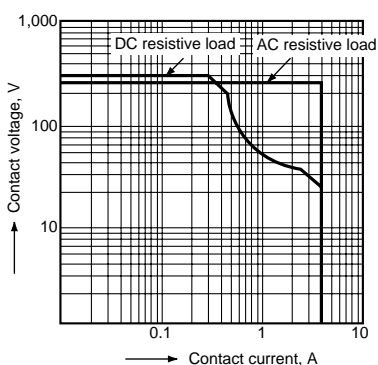


2. Life curve

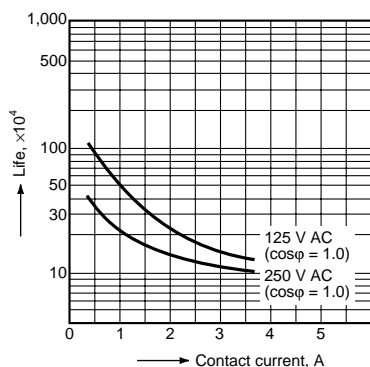


3. Contact reliability

Condition: 1V DC, 1mA
Detection level 10 Ω
Tasted Sample: S4-24V, 10pcs

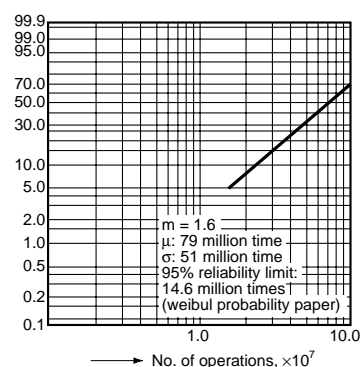


4.-(1) Coil temperature rise

Tested Sample: S4-24V, 4 Form A

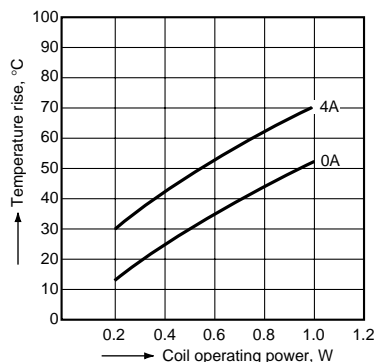


4.-(2) Coil temperature rise

Tested Sample: S4-24V, 4 Form A

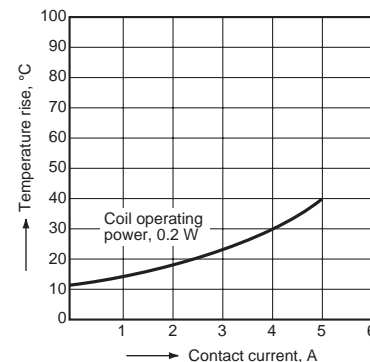


5. Operate and release time (Single side stable type)



Tested Sample: S4-24V, 10pcs

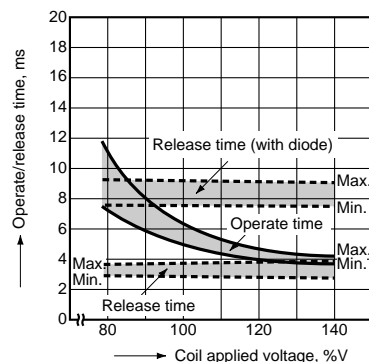


6. Influence of adjacent mounting




Note: When installing an S-relay near another, and there is no effect from an external magnetic field, be sure to leave at least 10 mm .394 inch between relays in order to achieve the performance listed in the catalog.

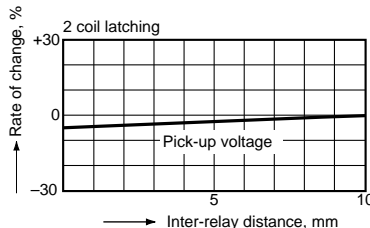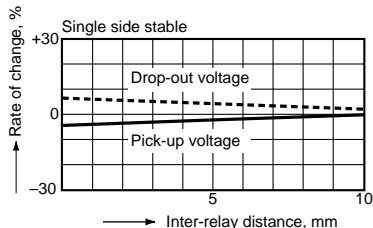

7. Thermal electromotive force

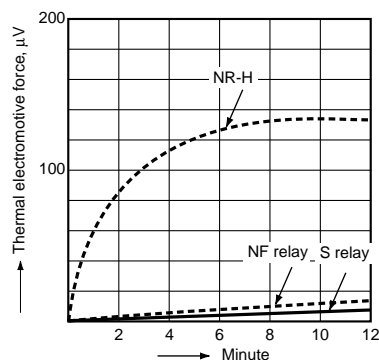

8. Effect from an external magnetic field

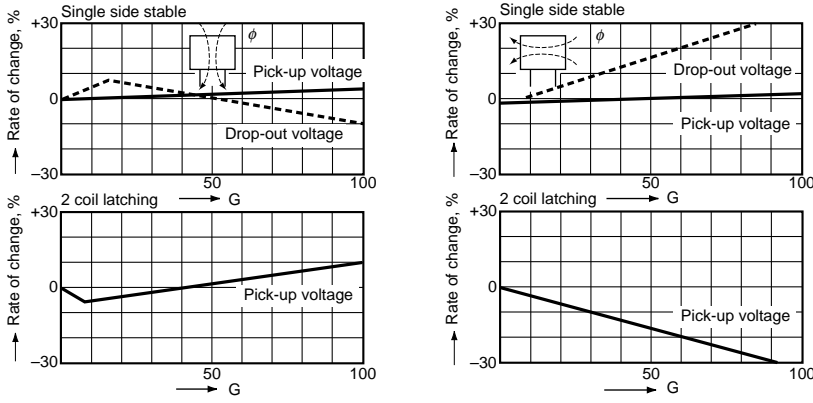

ACCESSORIES



S Relay Socket, S-PS




Specifications

Breakdown voltage	1,500 Vrms between terminals
Insulation resistance	More than 100 MΩ between terminals at 500 V DC Mega
Heat resistance	150 ±3°C (302 ±5.4°F) for 1 hour.
Maximum continuous current	4 A


(Note: Don't insert or remove relays while in the energized condition.)

Dimensions

mm inch

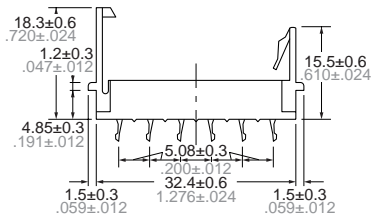


PC board pattern (Copper-side view)



Inserting and removing method

Inserting method: Insert the relay as shown in Fig. 1 until the rib of the relay snaps into the clip of the socket.




Removing method:

(1) Remove the relay straight from the socket holding the shaded portion of the relay as shown in Fig. 2.




(2) When sockets are mounted in close proximity, use a slotted screw driver as shown in Fig. 3.



NOTES

1. Special use of 2 coil latching types: 2 ways can be considered if 2 coil latching types are used as 1 coil latching types.
 (A) Reverse polarity is applied to the set coil of 2 coil latching type.
 (B) By shorting terminals 12 and 7, apply plus to 1, minus to 6 at set and plus to 6, minus to 1 at reset. Applied coil voltage should be the same as the nominal.
 Operating power will be reduced to one-half.


Reset position of 2a2b type

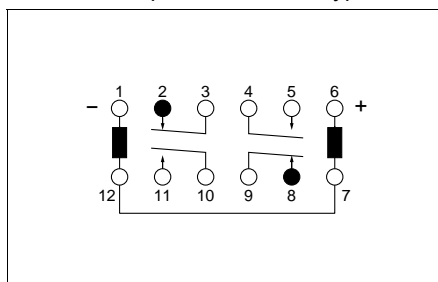

2. Soldering operations should be accomplished as quick as possible; within 10 seconds at 250°C 482°F solder temperature or 3 seconds at 350°C 662°F. The header portion being sealed with epoxy resin, undue subsection to heat may cause loss of seal. Solder should not be permitted to remain on the header.

CAUTIONS FOR USE

Based on regulations regarding insulation distance, there is a restriction on same-channel load connections between terminals No. 2, 3 and 4, 5, as well as between No. 8, 9 and 10, 11. See the figure below for an example.

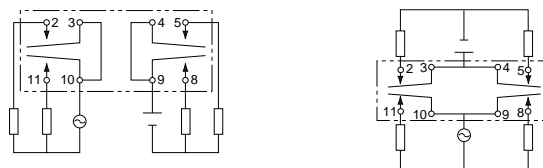

- Between 2, 3 and 4, 5: different channels, therefore not possible
- Between 10, 11 and 8, 9: different channels, therefore not possible
- Between 2, 3 and 4, 5: same channels, therefore possible
- Between 10, 11 and 8, 9: same channels, therefore possible

No good

Good

For Cautions for Use, see Relay Technical Information (see catalog).

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [5JO-1000CD-SIL](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#)