


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

CATALOG NUMBER	STRANDED COPPER CONDUCTOR SIZE (AWG)		NO. RIBS	DIMENSIONS - IN (mm)				COLOR CODE	WIRE STRIP LENGTH	INSTALLATION TOOLING PANDUIT DIE PART NO. DIE SET COLOR & INDEX NO. NO. OF CRIMPS ( )	
	RUN	TAP		A	Q	T (MATL THICKNESS)	V			CT-2001	CT-1700**
CTAPF10-16-C	14	16-14	0	.41	.13	.06	.19	RED	1/2	CT-2001-8	RED P21
	12	16-12		[10.4]	[3.3]	[1.5]	[4.8]				RED P21
	10	14									(2)
CTAPF8-12-C	10	10	0	.67	.19	.07	.26	BLUE	11/16	CD-2001-6	BLUE P24
	8	12		[17.0]	[4.8]	[1.8]	[6.6]				BLUE P24
CTAPF6-12-C	8	10-8	0	.67	.24	.07	.32	GRAY	11/16	CD-2001-4	GRAY P29
	6	12-10		[17.0]	[6.1]	[1.8]	[8.1]				GRAY P29
CTAPF4-12-C	6	8-6	1	1.25	.28	.07	.40	BROWN	1-5/16	CD-2001-2	BROWN P33
	5,4	12-8		[31.8]	[7.1]	[1.8]	[10.2]				BROWN P33
CTAPF3-12-C	5,4	6-5	1	1.25	.31	.08	.46	GREEN	1-5/16	CD-2001-1	GREEN P37
	3	12-6		[31.8]	[7.9]	[2.0]	[11.7]				GREEN P37
CTAPF2-12-C	4	4	1	1.25	.33	.08	.51	PINK	1-5/16	CD-2001-1/0	PINK P42
	3	5		[31.8]	[8.4]	[2.0]	[13.0]				PINK P42
	2	12-6									(1)
CTAPF1-12-C	3	4-3	2	1.82	.40	.08	.57	BLACK	1-7/8	CD-2001-2/0	BLACK P45
	2	5-4		[46.2]	[10.2]	[2.0]	[14.5]				BLACK P45
	1	12-5									(1)
CTAPF1/0-12-L	2	4-2	2	1.82	.42	.09	.63	ORANGE	1-7/8	CD-2001-3/0	ORANGE P50
	1	4-3		[46.2]	[10.7]	[2.3]	[16.0]				ORANGE P50
	1/0	12-4									(1)
CTAPF2/0-12-Q	1	2-1	2	1.82	.48	.09	.71	PURPLE	1-7/8	CD-2001-4/0	PURPLE P54
	2/0	12-3		[46.2]	[12.2]	[2.3]	[18.0]				PURPLE P54
	1/0	1-1/0									(1)
CTAPF3/0-12-Q	2/0	2-1	2	1.82	.55	.09	.81	YELLOW	1-7/8	CD-2001-250	YELLOW P62M
	3/0	12-2		[46.2]	[14.0]	[2.3]	[20.6]				YELLOW P62M
											(1)

\*CT-940CH AND CT-2940 REQUIRE CD-940-DA ADAPTER FOR CDM-920DIES  
 \*\*CT-1700 CRIMP DIE POCKETS ARE INTEGRATED INTO THE TOOL HEAD

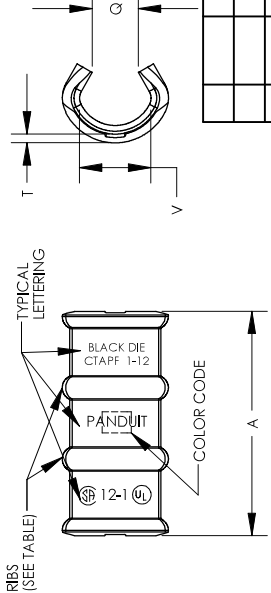

NOTES:

1. MATERIAL: COPPER
2. UL LISTED AND CSA CERTIFIED FOR APPLICATIONS UP TO 600 VOLTS. TEMPERATURE RATING 90 °C
3. PACKAGE QTY:  
 -L = 50  
 -C = 100  
 -Q = 25

**PANDUIT CORP. TINLEY PARK, ILLINOIS**  
 NON-INSULATED THIN-WALL C-TAP CONNECTORS  
 CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: (.XX) ± .XX (.XXX) ± .XXX ANGLES ± .1		SCALE: NONE
DRAWN BY: [ ]	DATE: [ ]	SEE NOTES
ECN	CUST'CH'KD	DWG NO / CAD FILE: C41172_05
		SIZE: B

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminals](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70226-9](#) [00-054007-70228-3](#) [00-054007-70248-1](#) [00-054007-70256-6](#) [00-054007-70301-3](#) [00-054007-70316-7](#) [0-0320562-0](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70225-2](#) [00-054007-70227-6](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70244-3](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [01-2065-1-0216](#) [01-2900-1-04412](#) [00581P0075](#) [600TS-10](#) [60205-1](#) [604200-1](#) [605601-1](#) [60598-1-CUT-TAPE](#) [61314-6-C](#) [61810-3](#) [61-S](#) [61-SN](#) [626-0194](#) [62-NBM-A](#) [62-SN](#) [62-SP](#) [640179-1](#) [M55155/059I03](#) [M55155/079C01](#) [M55155/099H02](#) [M55155/109H01](#) [M55155/109H02](#) [M55155/12XH05](#) [M55155/16XH02](#) [M55155/29-5S](#)