


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS. [889 NEWTONS]
WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS
AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
.XXX = ±.010 [.25]
.XX = ±.02 [.5]
.X = ±.03 [.8]
ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L=±.3 [7]
MLT1S-CP316	1" [25]	100	5.0" [127]
MLT2S-CP316	2" [51]	100	7.9" [201]
MLT2.7S-CP316	2.7" [69]	100	10.2" [259]
MLT4S-CP316	4" [102]	100	14.3" [362]
MLT6S-CP316	6" [152]	100	20.5" [521]
MLT8S-CP316	8" [203]	100	26.8" [679]
MLT10S-CP316	10" [254]	100	33.0" [838]

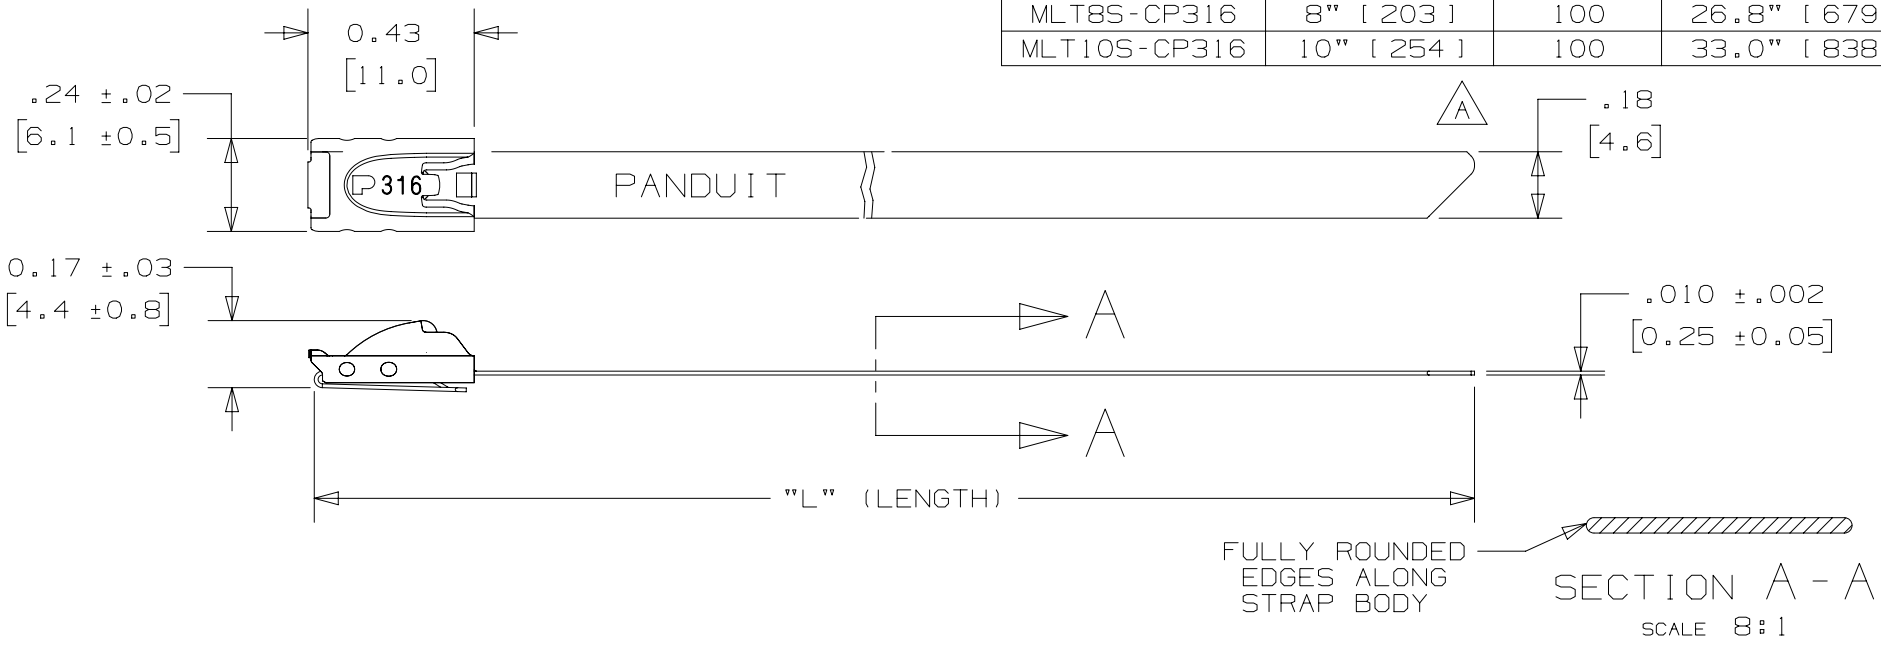

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
10	10.09.15	BDK	SKB	RGRO	A. ADDED NEW TIP CONFIGURATION	N41120BS_DC
09A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01037
08A	2/12	MIM	RGRO	---	NOTE:#3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	----

TITLE		METAL LOCKING TIE STANDARD SERIES 316 STAINLESS STEEL	
CUSTOMER DRAWING			
ITEM REVISION NAME		N41120BS/10	
DATASET FILE NAME		N41120BS_DC/010A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: 316 STAINLESS STEEL	
.x ± .1 [2.54] .xxx ± .005 [.127]		DRAWING NUMBER: N41120BS_DC	
.xx ± .01 [.25] ANGLES ± 5 °			
THIRD ANGLE PROJECTION			
DRAWN BY	DATE	CHK	SCALE
JAMB	2/12	DPN	2:1
SHT 1 OF 1			SIZE A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Ties](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[65037-C](#) [770-1751-10](#) [REL50L0C2](#) [20093-0](#) [SF600-120X](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK 58" X 50YD](#) [SJ3571](#)
[SJ-3571-1"x50yd-Black](#) [PLT2S-C4](#) [34-455-C](#) [3722](#) [561-B110120](#) [561-N3510](#) [TYZ528M](#) [34-463-C](#) [URT20S-M](#) [06226](#) [08350-0](#) [08600-0](#)
[08376-0](#) [10037-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [1122-4JW8](#) [561-EZ250](#) [561-EZ625](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-LOOP-BLACK-1](#)
[SJ3572-2"x50yd-Black](#) [CF5625-000](#) [65004-C](#) [65005-C](#) [65007-C](#) [65036-C](#) [157-00039](#) [770-1708](#) [770-1753-10](#) [770-1752](#) [SPNY-041-9](#)
[SF400-120X](#) [3719](#) [08582-0](#) [08386-0](#) [10431-0](#) [08359-0](#) [10620-0](#) [10345-0](#)