


Pan-Steel® Custom Length Strapping

- Fold over design provides high retained tension in mechanical fastening and cable bundling applications
- After tensioning, cut end is locked inside low profile buckle – no sharp edges
- For applications that require various bundle diameters
- Supplied in reels of 82.5 feet (25m) (coated) or 100 feet (30.5m) (uncoated)

- Provides job site versatility with minimum inventory
- Packaging speeds removal of steel and includes bundle diameter cut-off guide
- Available in AISI 201 (3/4" width only) and 304 stainless steel for general-purpose applications
- Available in AISI 316 stainless steel for the most corrosive environments



- Nylon 11 coating (optional):**
- Nylon 11 coating provides additional edge protection and prevents corrosion between dissimilar metals
 - UV resistant, low smoke, halogen-free material
 - Temperature tolerance -40°F (-40°C) to 285°F (140°C)
 - AISI 316 stainless steel for the most corrosive environments

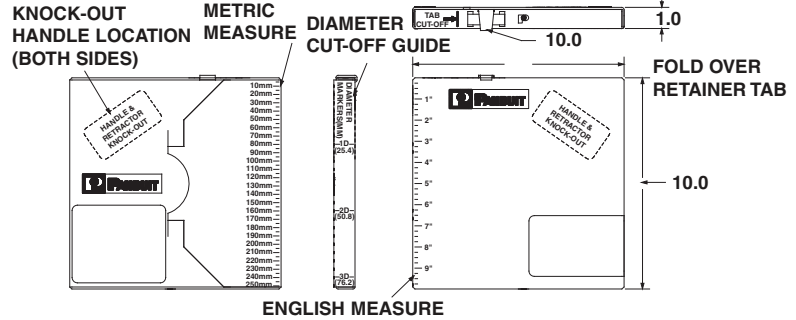

| Part Number | Length* | | Strap Breaking Strength | | Width | | Thickness^ | | Used with Buckle | Recommended Installation Tool*** | Std. Pkg. Qty.‡ |
|---|---------|------|-------------------------|-------|-------|------|------------|------|------------------|----------------------------------|-----------------|
| | Ft. | m | Lbs. | N | In. | mm | In. | mm | | | |
| 304 Stainless Steel | | | | | | | | | | | |
| MSW75T30-CR2 | 100 | 30.5 | 2400 | 10656 | 0.75 | 19.1 | 0.030 | 0.80 | MSBW75-C2 | BT75SDT | 1 |
| 304 Stainless Steel | | | | | | | | | | | |
| MSW38T15-CR4 | 100 | 30.5 | 502 | 2229 | 0.38 | 9.5 | 0.015 | 0.38 | MSBW38-C4 | BT2HT | 1 |
| MSW50T15-CR4 | 100 | 30.5 | 671 | 2979 | 0.50 | 12.7 | 0.015 | 0.38 | MSBW50-C4 | | 1 |
| MSW63T15-CR4 | 100 | 30.5 | 839 | 3725 | 0.63 | 15.9 | 0.015 | 0.38 | MSBW63-C4 | | 1 |
| 316 Stainless Steel | | | | | | | | | | | |
| MSW38T15-CR6 | 100 | 30.5 | 502 | 2229 | 0.38 | 9.5 | 0.015 | 0.38 | MSBW38-C6 | BT2HT | 1 |
| MSW50T15-CR6 | 100 | 30.5 | 671 | 2979 | 0.50 | 12.7 | 0.015 | 0.38 | MSBW50-C6 | | 1 |
| MSW63T15-CR6 | 100 | 30.5 | 839 | 3725 | 0.63 | 15.9 | 0.015 | 0.38 | MSBW63-C6 | | 1 |
| Nylon Coated Custom Length Strapping | | | | | | | | | | | |
| MSCNW38T15-QR6 | 82.5 | 25.0 | 502 | 2229 | 0.38 | 9.5 | 0.015 | 0.38 | MSBW38-C6 | BT2HT | 1 |
| MSCNW50T15-QR6 | 82.5 | 25.0 | 671 | 2979 | 0.50 | 12.7 | 0.015 | 0.38 | MSBW50-C6 | | 1 |
| MSCNW63T15-QR6 | 82.5 | 25.0 | 839 | 3725 | 0.63 | 15.9 | 0.015 | 0.38 | MSBW63-C6 | | 1 |

*Other lengths available, contact Panduit Customer Service. ^Base metal less coating. ‡Order in number of reels required. ***For information on installation tools, refer to page B3.26.

To determine the proper amount of strapping required, use the following formula:

$$\text{Calculate Diameter inches (mm) } \times 3.14 + 6 \text{ inches (152.4 mm)}$$

Pan-Steel® Buckles for Custom Length Strapping

- Buckle design provides a low finished profile
- After tensioning cut end is locked inside buckle – no sharp edges



| Part Number | Material | Width | | Part Description | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---------------------------------|----------|-------|------|---|----------------|----------------|
| | | In. | mm | | | |
| AISI 201 Stainless Steel | | | | | | |
| MSBW75-C2 | 201 | 0.75 | 19.1 | Individual low profile buckles used with metal strapping. | 100 | — |
| AISI 304 Stainless Steel | | | | | | |
| MSBW38-C4 | 304 | 0.38 | 9.5 | Individual low profile buckles used with custom length strapping. | 100 | 1000 |
| MSBW50-C4 | 304 | 0.50 | 12.7 | | 100 | 1000 |
| MSBW63-C4 | 304 | 0.63 | 15.9 | | 100 | 1000 |
| AISI 316 Stainless Steel | | | | | | |
| MSBW38-C6 | 316 | 0.38 | 9.5 | Individual low profile buckles used with custom length strapping. | 100 | 1000 |
| MSBW50-C6 | 316 | 0.50 | 12.7 | | 100 | 1000 |
| MSBW63-C6 | 316 | 0.63 | 15.9 | | 100 | 1000 |



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Ties](#) category:

Click to view products by [Panduit](#) manufacturer:

Other Similar products are found below :

[20093-0](#) [SJ-3463](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK 58" X 50YD](#) [SJ3571](#) [SJ-3571-1"x50yd-Black](#) [20113-0](#)
[T56137](#) [3-350087-0](#) [CTB75X75BKA-C](#) [3722](#) [561-B110120](#) [561-EZAB580T](#) [561-EZS375B40](#) [561-N3510](#) [561-TA250125](#) [08350-0](#) [08443-0](#)
[08600-0](#) [10035-0](#) [10036-0](#) [10037-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [561-EZ250](#) [561-EZ500](#) [561-EZ625](#) [561-EZ750](#) [561-TA00600](#) [SJ3519FR](#)
[BLACK 1X50](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-LOOP-BLACK-1](#) [SJ3572-2"x50yd-Black](#) [157-00039](#) [3719](#) [SJ-3401 BLACK 1"](#) [08445-0](#)
[08582-0](#) [08386-0](#) [10431-0](#) [08359-0](#) [10056-0](#) [10620-0](#) [10345-0](#) [10344-0](#) [08416-0](#) [08384-0](#) [08401-0](#)