


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

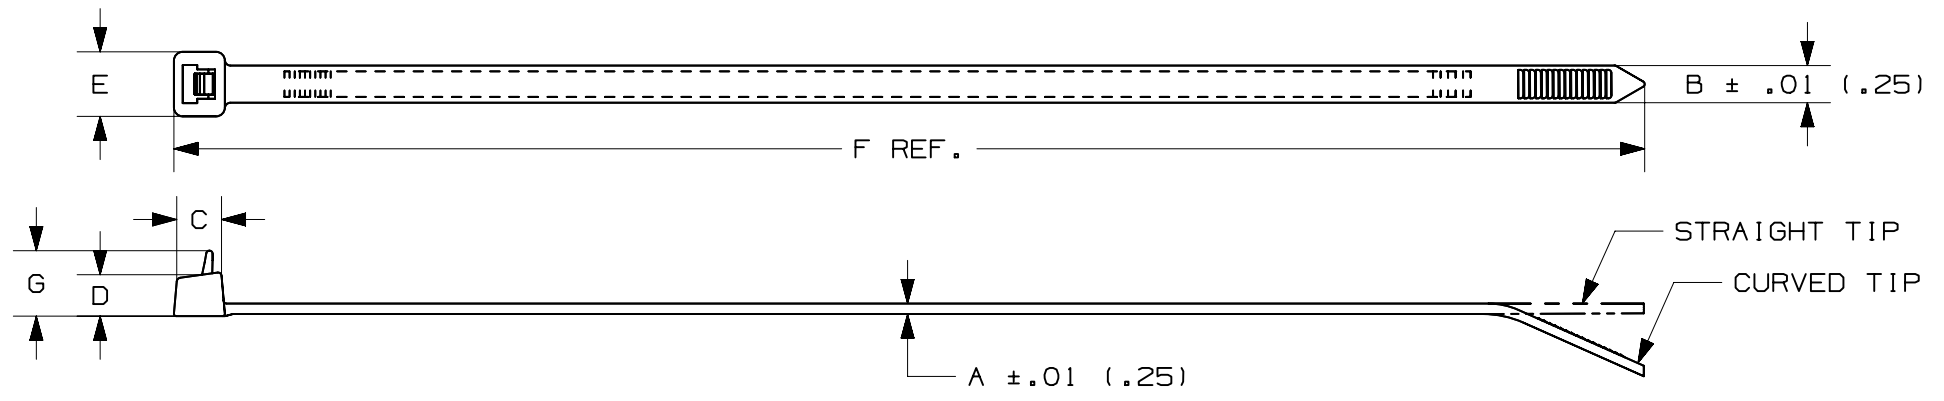

PANDUIT * PART NO.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	G in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS- SECTION	TIP STYLE	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)											
PRT1S	.06 (1.5)	1.00 (25)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	4.8 (122)	.318 (8.1)	50 (222)	STANDARD	CURVED	.13 (59)
PRT1.5S	.06 (1.5)	1.50 (38)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	6.3 (160)	.318 (8.1)	50 (222)	STANDARD	CURVED	.26 (119)
PRT2S	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	7.4 (188)	.318 (8.1)	50 (222)	STANDARD	CURVED	.29 (132)
PRT3S	.06 (1.5)	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.219 (5.6)	.337 (8.6)	11.5 (292)	.318 (8.1)	50 (222)	STANDARD	CURVED	.45 (205)
PRT4S	.06 (1.5)	4.00 (102)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.219 (5.6)	.337 (8.6)	14.5 (368)	.318 (8.1)	50 (222)	STANDARD	CURVED	.56 (255)

\* SEE [www.panduit.com](http://www.panduit.com) FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

D10100DA/16


						TITLE <b>PAN-TY CABLE TIES RELEASEABLE SERIES</b> CUSTOMER DRAWING	
						ITEM REVISION NAME 10B0150P/00	
						DATASET FILE NAME 10B0150P_DC_PRT/00A	
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ] .x ± .xx ± .02 [ .5 ]      .xxx ± .020 [ .51 ] ANGLES ±	
						MATERIAL: NYLON 6.6	
						DRAWING NUMBER: <b>SS-4472</b>	
14	11.17.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-4472	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	

DRAWN BY CEW	DATE 7-31-85	CHK HVP	SCALE NONE	SHT 1 OF 2	SIZE A
-----------------	-----------------	------------	---------------	------------	-----------

2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

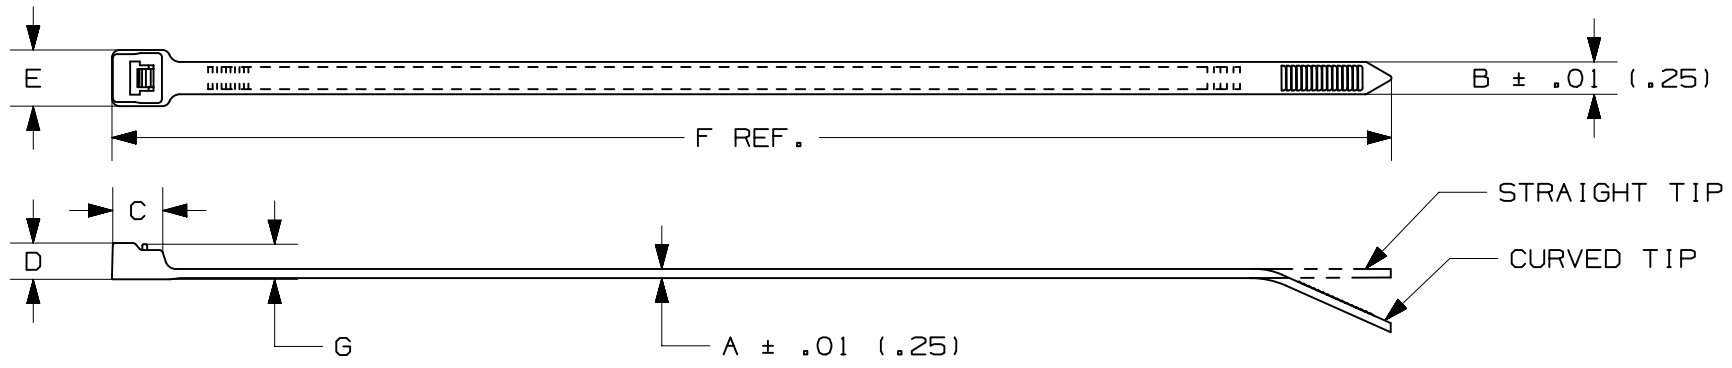

PANDUIT * PART NO.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	G in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS-SECTION	TIP STYLE	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)											
PRT2H	.188 (4.8)	2.00 (51)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	8.4 (213)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	.76 (346)
PRT3H	.188 (4.8)	3.00 (76)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	11.4 (290)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	1.04 (473)
PRT4H	.188 (4.8)	4.00 (102)	.075 (1.9)	.300 (7.6)	.413 (10.5)	.300 (7.6)	.480 (12.2)	14.5 (368)	.430 (10.9)	80 (356)	HEAVY	STRAIGHT	1.28 (581)

\* SEE [www.panduit.com](http://www.panduit.com) FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	ITEM REVISION NAME	DATASET FILE NAME	MATERIAL	DRAWING NUMBER
14	11.17.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-4472	PAN-TY CABLE TIES RELEASESLE SERIES CUSTOMER DRAWING	10B0150P/00	10B0150P_DC_PRT/00A	NYLON 6.6	SS-4472
CEW	7-31-85	HVP	NONE	SHT 2 OF 2							A

D10100DA/16

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Ties](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[65037-C](#) [770-1751-10](#) [REL50L0C2](#) [20093-0](#) [SF600-120X](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK 58" X 50YD](#) [SJ3571](#)  
[SJ-3571-1"x50yd-Black](#) [PLT2S-C4](#) [34-455-C](#) [3722](#) [561-B110120](#) [561-N3510](#) [TYZ528M](#) [34-463-C](#) [URT20S-M](#) [06226](#) [08350-0](#) [08600-0](#)  
[08376-0](#) [10037-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [1122-4JW8](#) [561-EZ250](#) [561-EZ625](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-LOOP-BLACK-1](#)  
[SJ3572-2"x50yd-Black](#) [CF5625-000](#) [65004-C](#) [65005-C](#) [65007-C](#) [65036-C](#) [157-00039](#) [770-1708](#) [770-1753-10](#) [770-1752](#) [SPNY-041-9](#)  
[SF400-120X](#) [3719](#) [08582-0](#) [08386-0](#) [10431-0](#) [08359-0](#) [10620-0](#) [10345-0](#)