



SURFACE MOUNT SWITCHING DIODES


Voltage 100 V Power 250mW

Features

- Fast switching speed.
- Surface mount package Ideally Suited for Automatic insertion
- Electrically Identical to Standard JEDEC
- High Conductance
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case: SOD-323, plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Approx. Weight: 0.00014 ounces, 0.0041 grams

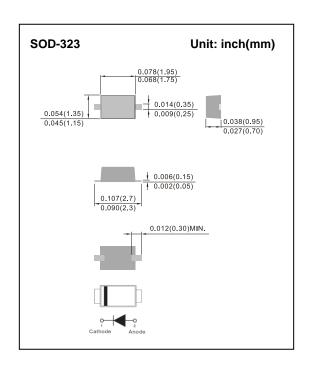

Maximum Ratings (T_A=25°C unless otherwise noted)

PARAMETER		SYMBOL	VALUE	UNIT
Marking code		-	A2	-
Reverse voltage		VR	75	V
Maximum dc blocking voltage		VDC	75	V
Peak reverse voltage		Vrm	100	V
RMS voltage		VRMS	50	V
Maximum average forward current at TA=2		I F(AV)	200	mA
0.001ms Peak forward surge current 10ms 1s		IFSM	4 1.5 0.5	А
Power dissipation derate above 25°C		PD	250	mW
Maximum forward voltage		VF	0.715@1mA 0.855@10mA 1@50mA 1.25@150mA	V
Maximum dc reverse current at rated dc blocking voltage		lR	0.025@20V 2.5@75V	μА
Junction capacitance Measured at 1MHz and applied VR=0V		Cı	1.5	pF
Maximum reverse recovery time	(Note 3)	TRR	4	ns
Typical thermal resistance	(Note 1) (Note 2) (Note 4) (Note 4)	Reja Reja Rejc Rejl	500 650 280 400	°C/W
Operating and storage temperature range	[(-//	TJ, TSTG	-55 to +150	°C


Note: 1. Mounted on a FR4, single-sided copper, with 50 x 15mm PCB.


- 2. Mounted on a FR4, single-sided copper, with mini pad.
- 3. From I_F=10mA to I_R=1mA, V_R=6Volts, R_L =100 Ω .
- 4. Mounted on a FR-4 PCB, single-sided copper, mini pad, with 100cm² copper pad area.






TYPICAL CHARACTERISTIC CURVES

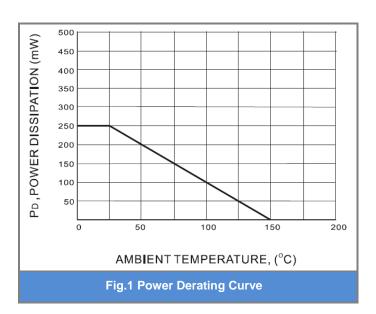

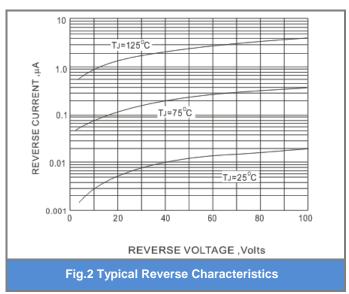

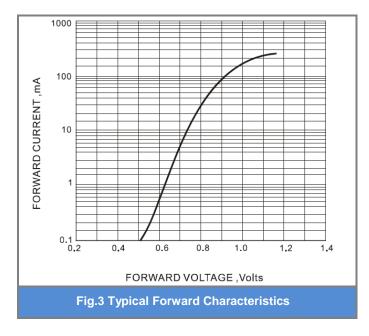






Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
1N4148WS_R1_00001	SOD-323	5K pcs / 7" reel	A2	Halogen free
1N4148WS_R2_00001	SOD-323	12K pcs / 13" reel	A2	Halogen free

Mounting Pad Layout

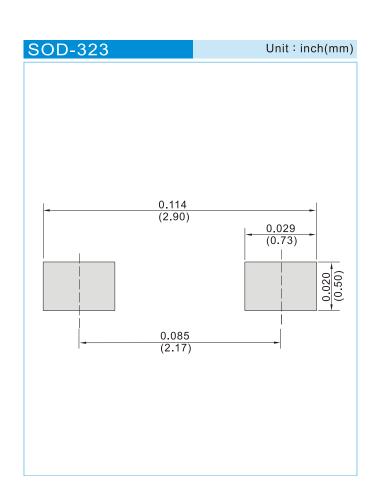





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.

•	Since Panjit uses	lot number as the	tracking hase	nlease provide tl	ha lot numhar foi	tracking when	complaining
•	Ollice I allil uses	ioi number as me	Hacking base.	DICASE DI UVIGE LI	HE IOLHUHIDEH IOL	Hacking witch	COHDIAN III IU.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Panjit manufacturer:

Other Similar products are found below:

MCL4151-TR3 MMBD3004S-13-F RD0306T-H 1N3611 NTE156A NTE574 NTE6244 1SS193,LF 1SS400CST2RA SDAA13

SHN2D02FUTW1T1G LS4151GS08 1N4449 1N456A 1N4934-E3/73 1N914BTR RFUH20TB3S D291S45T BAV300-TR BAW56DWQ
7-F BAW56M3T5G BAW75-TAP MM230L-CAA IDW40E65D1 JAN1N3600 JAN1N4454UR-1 LL4151-GS18 SMMSD4148T3G

BYW95B/A52A NSVDAN222T1G CDSZC01100-HF LL4150-M-08 1N4454-TR BAV70HDW-7 BAS28-7 JANTX1N6640 BAW56HDW
13 BAS28 TR VS-HFA04SD60STR-M3 NSVM1MA152WKT1G 1SS388-TP RGP30D-E3/73 VS-8EWF02S-M3 BAV99TQ-13-F

BAV99HDW-13 MMDB30-E28X IDP20C65D2XKSA1 LS4148 IDV15E65D2 NSVM1MA152WAT1G