

# SPECIFICATIONS


[General Specifications]

Model	CWK2S-24-CD	CWK3S-24-CD	CWK6S-24-CD
Color Code	CD		
Luminous Color	Daylight		
Color Temperature (typ.)	6500 K		
Illuminance (typ.) (Center, at 24V DC)	1.0m 600 lx	850 lx	1500 lx
Total Luminous Flux (typ.)	800 lm	1200 lm	2400 lm
Rated Voltage	24V DC (Polarized)		
Operating Voltage Range	24V DC $\pm 10\%$		
Rated Current Consumption	360mA $\pm 10\%$	480mA $\pm 10\%$	960mA $\pm 10\%$
Rated Power Consumption	8.64W	11.52W	23.04W
Operating Ambient Temperature	$-10^{\circ}\text{C} \sim +50^{\circ}\text{C}$		
Operating Ambient Humidity	90%RH or less, no condensation		
Main Unit Material	Body : Aluminum Alloy , Lens : Tempered Glass		
Mounting Location	Indoor		
Mounting Direction	All Directions		
Protection Rating	IP66G/67G (JIS C0920)		
Environmental Condition	Cable Connector not included		
Insulation Resistance	500V DC 5M $\Omega$ or more		
Withstand Voltage	500V AC for 1 minute (between terminals and chassis)		
Vibration Resistance	30Hz 20 m/s <sup>2</sup> Back and Forth, Up and Down, Left and Right for 2hrs. Each		
Mass (Tolerance $\pm 10\%$ )	600g	750g	1230g
Dimensions	Refer to Outer Dimension Drawing		
Conformity Standards	Conforms to the CE requirements:EN 55015, EN 61000-6-2 RoHS Directive(DIRECTIVE 2011/65/EU) UL Listed (File No.E306141)		
Remarks	<p>• Model Number Configuration</p> <p style="font-size: 1.2em; text-align: center;">CWK <span style="border: 1px solid black; padding: 0 5px;"> </span> S - 24 - CD</p> <p style="margin-left: 40px;">↑</p> <p style="margin-left: 40px;">● Light Unit Length</p> <p style="margin-left: 40px;">2 : 200mm</p> <p style="margin-left: 40px;">3 : 300mm</p> <p style="margin-left: 40px;">6 : 600mm</p> <p>※1 Specifications and dimensions may change without prior notice for improvements, etc.</p> <p>※2 Due to the characteristics of the LED, color temperature, brightness and hue will differ for every LED and every product.</p> <p>※3 This product's illuminance may be affected when used in airtight conditions.</p>		


No. CWK3S-24-W18A-1\_2

## PATLITE Corporation


【CWK2S-24-CD】

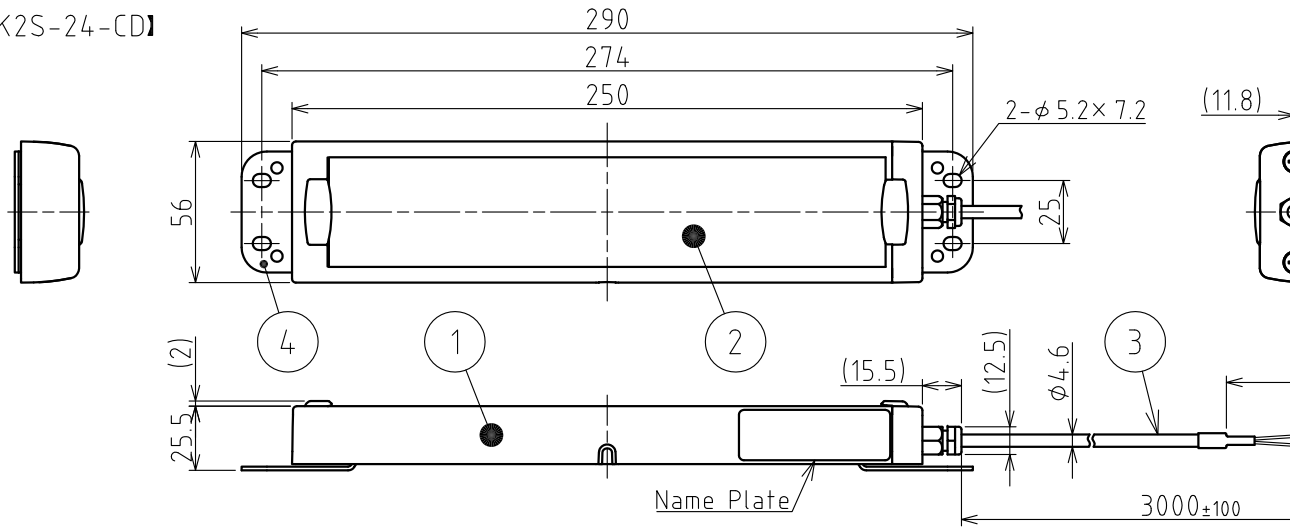

【CWK3S-24-CD】

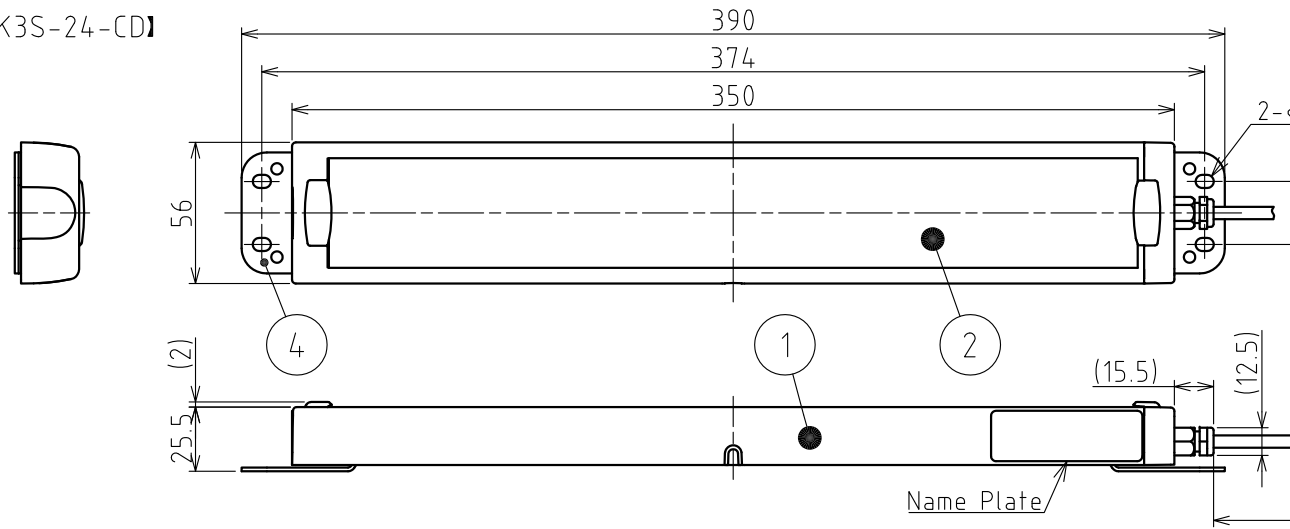

【CWK6S-24-CD】

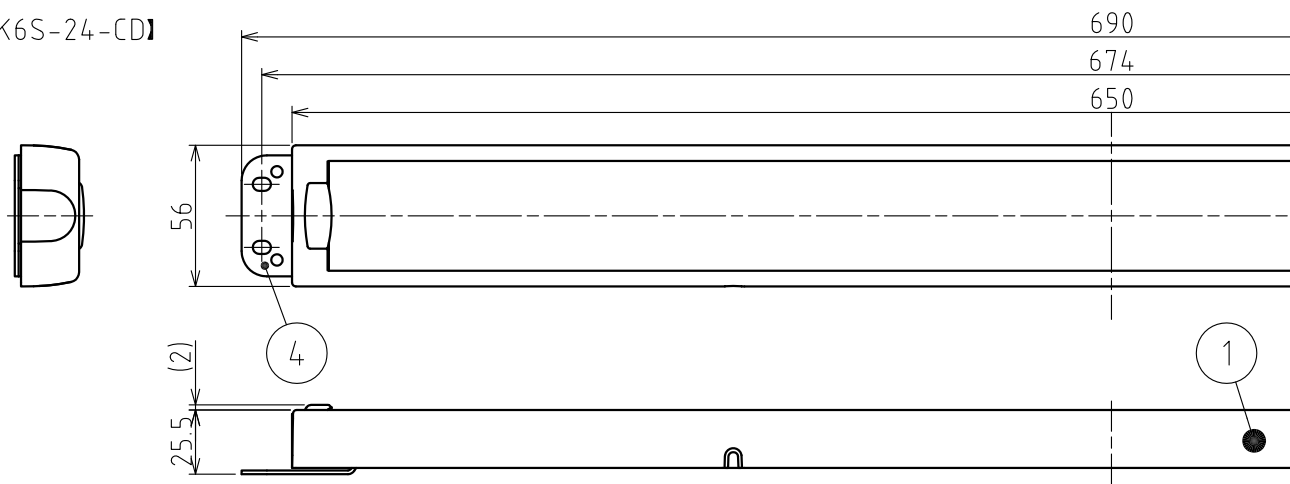

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Replacement Lamps - Based LEDs](#) category:*

*Click to view products by [Patlite](#) manufacturer:*

Other Similar products are found below :

[LAPD-1A](#) [LAPD-1R](#) [LAPD-2R](#) [LAPD-6W](#) [LSTD-M4S](#) [SSP-1156B153S12](#) [SSP-1157B156U12](#) [SSP-LXS110818BA](#) [560-0101F](#) [560-0103F](#)  
[LAPD-1W](#) [LAPD-6R](#) [560-0104F](#) [585-1113](#) [SSP-LXC1283S24](#) [SSP-3MB96U12G](#) [SLL-05EY](#) [1.90.690.684/0000](#) [560-0203F](#) [586-2206-205F](#) [SSP-LXS1826U16A](#) [LATD-2JW](#) [24LS4-G1](#) [24LS4-R1](#) [MF200-NFW5H](#) [MB403-W60-CW-BP](#) [1819LS2-G-CG](#) [387LP-R](#) [387LP-B](#)  
[387LP-W](#) [387LP-G](#) [6S6LS155-CWR](#) [130MBLS-G-CG](#) [5000404LAMP](#) [E10SB12A](#) [E10SB130A](#) [E10SB24A](#) [E10SG12A](#) [E10SG130A](#)  
[E10SR12A](#) [E10SR130A](#) [E10SW12A](#) [E10SY12A](#) [E10SY130A](#) [6S6LS130-CWW](#) [MF200-BCG12H](#) [MF200-NFR5H](#) [24L4-B1](#) [120PSBL-NWW](#) [MF200-NKG120](#)