



8 Port Gigabit Power over Ethernet Midspan POE370U for 10/100/1000 Base-T Networks



Features

- IEEE 802.3af Detection, Disconnect and Overload Protection
- NIC Interface (Optional)
- SSL Option with SNMPv3
- 10/100/1000 base T Compatible
- Limited Lifetime Warranty
- Full Power of 370W--15.4W per Port
No Power Management required
- Full Protection OTP, OCP, OVP
- 48V RPS Input (Optional)
- Cisco Legacy Detection
- 1U Rack Mounting Kit Ships with Unit

Applications

- VoIP Phones
- Access Point
- Security Systems
- Lighting Systems with Single UPS

Safety Approvals

- cUL/UL
- CE
- SAA
- C-Tick

Mechanical Characteristics

- Length: 438mm (17.25in)
- Width: 228mm (8.98in)
- Height: 44.5 mm (1.75in)
- Weight: 3.8Kg (8.5lbs)

Output Specifications

Model	Number of Ports	Maximum Output Power
POE370U-480-8-R	8	125W
POE370U-480-8-N-R	8	125W

Notes: (1) "N" includes SNMP, Simple Network Management Protocol

Reference Files:

1. [Multiport Midspan Installation Manual.pdf](#)
2. [19in Rack Mounting Kit Datasheet.pdf](#)
3. [SNMPv2c User Manual-Rev1.7.pdf](#)
4. [SNMPv2c Firmware-Rev1.7.zip](#)
5. [SNMPv2c MIB 10 30 2009.zip](#)

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

INPUT:**AC Input Voltage Range**

90 to 264VAC

AC Input Voltage Rating

100 to 240VAC

AC Input Current

5.5A (RMS) maximum for 90VAC

2.75A (RMS) maximum for 240VAC

Leakage Current

3.5mA maximum @ 254VAC 60Hz

AC Input Frequency

47-63Hz

AC Inrush Current

30A (RMS) maximum for 115VAC

60A (RMS) maximum for 230VAC

OUTPUT:**Total Output Power**

15.4W per port

Ripple and Regulation

100mV maximum

Efficiency

75% (typical) at maximum load, and

120VAC 60Hz

Hold-up Time

16mS min. 120VAC at maximum load

Transient O/P Voltage Protection

60V maximum at switch on and off at any

AC line Phase

Turn-On Delay Time

3 sec maximum at maximum load, and

120VAC 60Hz, 25Hz

ENVIRONMENTAL:**Temperature**

Operation 0 to +40°C

Non-operation -25 to +65°C

Humidity 5 to 90%

EMC

Complies with FCC Class B

Complies with EN55032 Class B

Isolation Test

Primary to Secondary: 4242VDC for 1 minute

Primary to Ground: 2121VDC for 1 minute

Secondary to Ground: 2121VDC for 1 minute

Immunity EN50082-1

ESD: EN61000-4-2. Level 3

RS: EN61000-4-3. Level 2

EFT: EN61000-4-4. Level 2

Surge: EN61000-4-5. Level 3

CS: EN61000-4-6. Level 2

Voltage Dips EN61000-4-11

Harmonic: EN61000-3-2 Class A

IEEE 802.3af Interoperability

UNH Interoperability report available on request

FEATURES:**Cisco Legacy detection**

No extern parts required for Legacy devices:

VoIP Phones:

7910, 7912, 7940, 7960

Access Points:

350, 1100, 1200

Over Voltage/Current, Short Circuit Protection

The output can be shorted permanently without damage

Over Temperature Protection

Automatic shutdown without damage

Indicators

Green LED: Power detected “ON”

Yellow LED: Fault detected

USB Diagnostics Port

USB “B” port for diagnostics and manual port control

Windows GUI

Input Connector

AC

IEC320 inlet 3 pin


DC for RPS option

Molex Minifit

Shell 39-01-20-65

Pins 39-00-0077

POE370U-480-8 Dimension Diagram Unit: mm

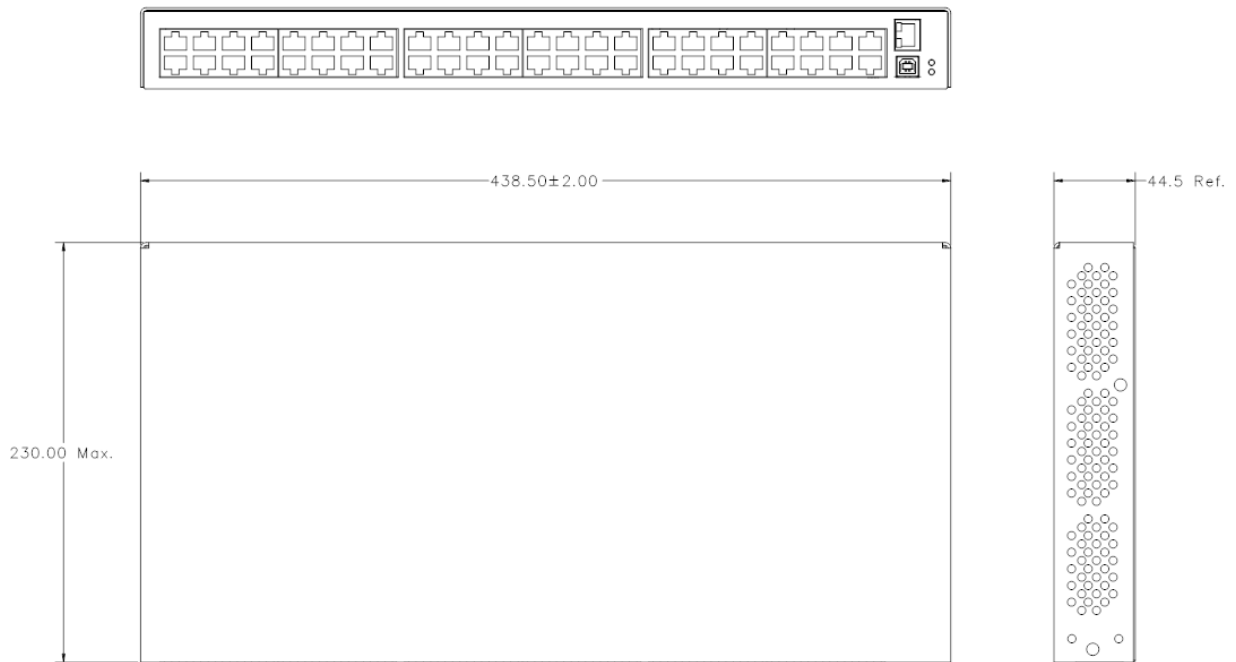

Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: This model has/The models in this products series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power over Ethernet - PoE category](#):

Click to view products by [Phihong manufacturer](#):

Other Similar products are found below :

[PD-3504G/AC](#) [PD-9601G/AC](#) [PD-3504G/AC-EU](#) [180993-3001](#) [GHOSTBRIDGE-POE](#) [EKI-2701HPI-AE](#) [EKI-2701MPI-AE](#) [EKI-2701MPI-R-AE](#) [EKI-2701PSI-AE](#) [EKI-2741FHPI-AE](#) [PALS400-2482G](#) [PALS600-2482G](#) [AWPOE](#) [PD-9001GC/AC](#) [PD-9001GI/DC](#) [PD-9001GO-ET/AC](#) [PD-9001GR/AT/AC-EU](#) [PD-9601GC/AC-EU](#) [PD-9601GC/AC](#) [PD-9606GC/AC-EU](#) [PD-9612GC/AC-EU](#) [PD-9624GC/AC-EU](#) [PD-9624GC/AC-US](#) [PD-9624GC/AC](#) [PD-9001GR/AT/AC-JP](#) [PD-9501GC/AC-EU](#) [PD-6506G/AC/M](#) [PD-9001GRAC](#) [PD-OUT/MBK/G](#) [NPS-30W-B](#) [NPS-30W-WOC](#) [PD-9501GO-ET/AC](#) [PD-9601G/AC-EU](#) [PD-OUT/MBK/ET](#) [PD-OUT/MBK/S](#) [POE14-137-R](#) [POE16R-560L6](#) [POE16S-1AFG-R](#) [POE30S-1ATG-R](#) [POE370U-480-16N-R](#) [POE370U-480-16-R](#) [POE370U-480-8N-R](#) [POE370U-480-8-R](#) [POE45-120-R](#) [POE576U-16ATN-R](#) [POE60D-560G-R](#) [POE60S-1BT-R](#) [POE60S-4AF-R](#) [POE60U-1BT-5](#) [POE90U-1BT6-R](#)