

## Base strip - CIOC 4-1-LIH - 1701362

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)




Header, Nominal current: 5 A, Number of positions: 4, Pitch: 2.54 mm, Color: Black, Contact surface: Gold, Assembly: Soldering

### Product Features

- ✓ Gold-plated contact system
- ✓ The CIOC 4-18-LI plug can be combined with -LIH or -LIV base strips for a horizontal or vertical PCB connection
- ✓ The CIOC plug-in plug range is complemented by a 4-pos. link plug with 2.54 mm pitch
- ✓ A plug-in tap at any point in the bus and power cable can be achieved using two CIOC 4-18-LI plugs



### Key commercial data

Packing unit	1 PCE
Minimum order quantity	100 PCE
GTIN	 4 046356 030472
Custom tariff number	85366990
Country of origin	JAPAN

### Technical data

#### Dimensions / positions

Pitch	2.54 mm
Dimension a	7.5 mm
Number of positions	4
Pin spacing	2.54 mm

#### Technical data

Range of articles	CIOC-LINK
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	5 A

## Base strip - CIOC 4-1-LIH - 1701362

### Technical data

#### Technical data

Nominal voltage $U_N$	160 V
Maximum load current	5 A
Insulating material	PBT
Inflammability class according to UL 94	V0
Color	Black

### Classifications

#### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

#### UNSPSC

UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409
UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409

#### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402

### Approvals

#### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized

---

#### Ex Approvals

---

# Base strip - CIOC 4-1-LIH - 1701362

## Approvals

Approvals submitted

### Approval details

UL Recognized	
Nominal current IN	5 A
Nominal voltage UN	160 V

cUL Recognized	
Nominal current IN	5 A
Nominal voltage UN	160 V

GOST	
------	--


GOST	
------	--

cULus Recognized	
------------------	--


## Drawings

## Base strip - CIOC 4-1-LIH - 1701362

Drilling diagram



Dimensioned drawing

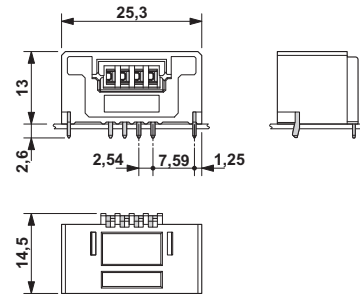

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)