

## Power supply unit - STEP-PS/ 1AC/12DC/1 - 2868538

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Primary-switched STEP POWER power supply for DIN rail mounting, input: 1-phase, output: 12 V DC/1 A


### Product Description

STEP POWER power supplies for distribution boards


The STEP POWER power supply range was developed especially for building automation. The low idling losses and high degree of efficiency ensure maximum energy efficiency. They allow flexible use and can be snapped onto the DIN rail or screwed onto an even surface.

### Your advantages

- ✓ Flexible mounting by simply snapping onto the DIN rail or screwing onto a level surface
- ✓ Reliable power supply thanks to high MTBF (mean time between failures) of more than 500,000 hours and U/I characteristic curve
- ✓ Energy savings thanks to maximum energy efficiency and incredibly low idling losses



### Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 1 pc  |
| GTIN         | <br>4 046356 519960 |
| GTIN         | 4046356519960   |

### Technical data

#### Dimensions

|                                  |               |
|----------------------------------|---------------|
| Width                            | 18 mm         |
| Height                           | 90 mm         |
| Depth                            | 61 mm         |
| Installation distance right/left | 0 mm / 0 mm   |
| Installation distance top/bottom | 30 mm / 30 mm |

#### Ambient conditions

|   |  |
|---|--|
| Degree of protection                    | IP20   |
| Ambient temperature (operation)         | -25 °C ... 70 °C (> 55° C derating : 2.5%/K) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C                             |

# Power supply unit - STEP-PS/ 1AC/12DC/1 - 2868538

## Technical data

### Ambient conditions

|  |                                 |
|--|---------------------------------|
| Max. permissible relative humidity (operation) | 95 % (at 25 °C, non-condensing) |
| Climatic class                                 | 3K3 (in acc. with EN 60721)     |
| Degree of pollution                            | 2                               |

### Input data

|  |   |
|--|---|
| Nominal input voltage range              | 100 V AC ... 240 V AC                     |
| Input voltage range                      | 85 V AC ... 264 V AC                      |
|  | 95 V DC ... 250 V DC                      |
| AC frequency range                       | 45 Hz ... 65 Hz                           |
| Frequency range DC                       | 0 Hz                                      |
| Current consumption                      | 0.26 A (120 V AC)                         |
|  | 0.13 A (230 V AC)                         |
| Nominal power consumption                | 38.7 VA                                   |
| Inrush current                           | < 15 A (typical)                          |
| Mains buffering time                     | typ. 15 ms (120 V AC)                     |
|  | typ. 90 ms (230 V AC)                     |
| Input fuse                               | 1.25 A (slow-blow, internal)              |
| Recommended breaker for input protection | 6 A ... 16 A (Characteristics B, C, D, K) |
| Power factor (cos phi)                   | 0.38                                      |

### Output data

|  |   |
|--|---|
| Nominal output voltage                             | 12 V DC $\pm$ 1 %                             |
| Nominal output current ( $I_N$ )                   | 1 A (-25 °C ... 55 °C)                        |
|  | 1.1 A (-25 °C ... 40 °C permanent )           |
| Output current $I_{max}$                           | 1.8 A   |
| Derating   | 55 °C ... 70 °C (2.5%/K)                      |
| Connection in parallel                             | Yes, for redundancy and increased capacity    |
| Connection in series                               | yes   |
| Feedback voltage resistance                        | max. 25 V DC                                  |
| Protection against overvoltage at the output (OVP) | < 25 V DC                                     |
| Control deviation                                  | < 1 % (change in load, static 10 % ... 90 %)  |
|  | < 2 % (change in load, dynamic 10 % ... 90 %) |
|  | < 0.1 % (change in input voltage $\pm$ 10 %)  |
| Residual ripple                                    | < 20 mV <sub>PP</sub> (20 MHz)                |
| Output power                                       | 12 W  |
| Typical response time                              | < 0.5 s                                       |
| Peak switching voltages nominal load               | < 10 mV <sub>PP</sub> (20 MHz)                |
| Maximum power dissipation in no-load condition     | < 0.4 W                                       |
| Power loss nominal load max.                       | < 2.8 W                                       |

### General

|            |         |
|------------|---------|
| Net weight | 0.07 kg |
|------------|---------|

# Power supply unit - STEP-PS/ 1AC/12DC/1 - 2868538

## Technical data

### General

|                                 |  |
|---------------------------------|--|
| Efficiency                      | > 83 % (for 230 V AC and nominal values)       |
|                                 | > 1478000 h (40 °C)                            |
| Insulation voltage input/output | 4 kV AC (type test)                            |
|                                 | 3.75 kV AC (routine test)                      |
| Insulation voltage input / PE   | 3.5 kV AC (type test)                          |
|                                 | 2 kV AC (routine test)                         |
| Insulation voltage output / PE  | 500 V DC (routine test)                        |
| Degree of protection            | IP20   |
| Protection class                | II (in closed control cabinet)                 |
| Housing material                | Polycarbonate                                  |
| Foot latch material             | POM (Polyoxymethylen)                          |
| Mounting position               | horizontal DIN rail NS 35, EN 60715            |
| Assembly instructions           | alignable: 0 mm horizontally, 30 mm vertically |

### Connection data, input

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Screw connection    |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 12                  |
| Stripping length                      | 6.5 mm              |
| Screw thread                          | M3                  |

### Connection data, output

|                                       |                     |
|---------------------------------------|---------------------|
| Connection method                     | Screw connection    |
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 12                  |
| Stripping length                      | 6.5 mm              |
| Screw thread                          | M3                  |

### Standards

|                                     |               |
|-------------------------------------|---------------|
| EMC requirements for noise immunity | EN 61000-6-1  |
|                                     | EN 61000-6-2  |
| EMC requirements for noise emission | EN 61000-6-3  |
|                                     | EN 61000-6-4  |
| Standard - Safety of transformers   | EN 61558-2-16 |

# Power supply unit - STEP-PS/ 1AC/12DC/1 - 2868538

## Technical data

### Standards

|  |  |
|--|--|
| Standard - Electrical safety   | IEC 60950-1/VDE 0805 (SELV)              |
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV)                 |
| Standard – Safety extra-low voltage  | IEC 60950-1 (SELV) and EN 60204-1 (PELV) |
| Standard - Safe isolation  | DIN VDE 0100-410                         |
| Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment               | EN 50178                                 |
| Standard – Limitation of mains harmonic currents   | EN 61000-3-2                             |
| Rail applications  | EN 50121-4                               |

### Conformance/approvals

|              |   |
|--------------|---|
| UL approvals | UL/C-UL listed UL 508   |
|              | UL/C-UL Recognized UL 60950-1   |
|              | UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D T4 (Hazardous Location) |
|              | NEC Class 2 as per UL 1310  |

### EMC data

|                               |   |
|-------------------------------|---|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU         |
| Low Voltage Directive         | Conformance with Low Voltage Directive 2014/35/EC |
| Electrostatic discharge       | EN 61000-4-2                                      |
| Contact discharge             | 6 kV (Test Level 3)                               |
| Discharge in air              | 8 kV (Test Level 3)                               |
| Electromagnetic HF field      | EN 61000-4-3                                      |
| Frequency range               | 80 MHz ... 1 GHz                                  |
| Test field strength           | 10 V/m  |
| Frequency range               | 1 GHz ... 2 GHz                                   |
| Test field strength           | 10 V/m  |
| Frequency range               | 2 GHz ... 3 GHz                                   |
| Test field strength           | 10 V/m  |
| Comments                      | Criterion A                                       |
| Fast transients (burst)       | EN 61000-4-4                                      |
| Input                         | 4 kV (Test Level 4 - asymmetrical)                |
| Output                        | 2 kV (Test Level 3 - asymmetrical)                |
| Comments                      | Criterion A                                       |
| Surge voltage load (surge)    | EN 61000-4-5                                      |
| Input                         | 2 kV (Test Level 3 - symmetrical)                 |
|                               | 4 kV (Test Level 4 - asymmetrical)                |
| Output                        | 1 kV (Test Level 2 - symmetrical)                 |
|                               | 0.5 kV (Test Level 1 - asymmetrical)              |
| Comments                      | Criterion A                                       |
| Conducted interference        | EN 61000-4-6                                      |
| Frequency range               | 10 kHz ... 15 kHz                                 |

# Power supply unit - STEP-PS/ 1AC/12DC/1 - 2868538

## Technical data

### EMC data


|              |                     |
|--------------|---------------------|
|              | 0.15 MHz ... 80 MHz |
| Voltage      | 3 V (Test Level 2)  |
|              | 10 V (Test Level 3) |
| Comments     | Criterion A         |
|              | Criterion A         |
| Voltage dips | EN 61000-4-11       |

### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 25;   |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings

Block diagram

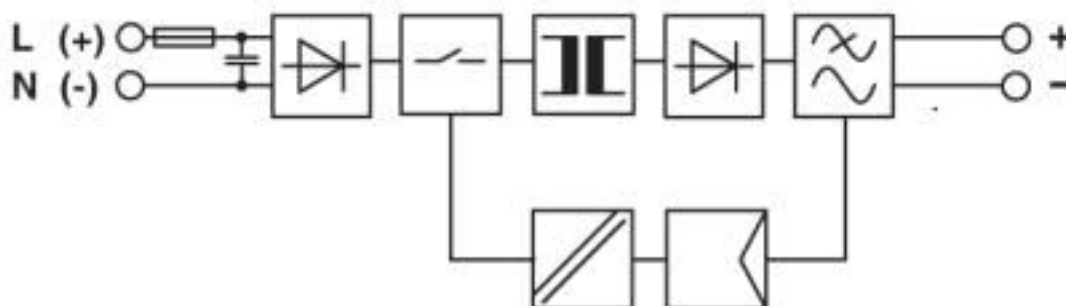

## Classifications

### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27040701 |
| eCl@ss 4.0    | 27040700 |
| eCl@ss 4.1    | 27040700 |
| eCl@ss 5.0    | 27049000 |
| eCl@ss 5.1    | 27049000 |
| eCl@ss 6.0    | 27049000 |
| eCl@ss 7.0    | 27049002 |
| eCl@ss 8.0    | 27049002 |
| eCl@ss 9.0    | 27040701 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001039 |
| ETIM 4.0 | EC002542 |
| ETIM 5.0 | EC002540 |

# Power supply unit - STEP-PS/ 1AC/12DC/1 - 2868538

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 6.0 | EC002540 |
| ETIM 7.0 | EC002540 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211502 |
| UNSPSC 7.0901 | 39121004 |
| UNSPSC 11     | 39121004 |
| UNSPSC 12.01  | 39121004 |
| UNSPSC 13.2   | 39121004 |
| UNSPSC 18.0   | 39121004 |
| UNSPSC 19.0   | 39121004 |
| UNSPSC 20.0   | 39121004 |
| UNSPSC 21.0   | 39121004 |

## Approvals

### Approvals

#### Approvals

UL Listed / UL Recognized / cUL Recognized / IECCEB Scheme / cUL Listed / EAC / EAC / cULus Recognized / cULus Listed

#### Ex Approvals

UL Listed / cUL Listed / cULus Listed

### Approval details

|           |  |   |               |
|-----------|--|---|---------------|
| UL Listed |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 123528 |
|-----------|--|---|---------------|

|               |  |   |               |
|---------------|--|---|---------------|
| UL Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 214596 |
|---------------|--|---|---------------|

|                |  |   |               |
|----------------|--|---|---------------|
| cUL Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 214596 |
|----------------|--|---|---------------|

|                 |  |   |                   |
|-----------------|--|---|-------------------|
| IECEE CB Scheme |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DK-20185-A1-M1-UL |
|-----------------|--|---|-------------------|

# Power supply unit - STEP-PS/ 1AC/12DC/1 - 2868538

## Approvals

|            |  |   |               |
|------------|--|---|---------------|
| cUL Listed |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 123528 |
|------------|--|---|---------------|

|     |  |               |
|-----|--|---------------|
| EAC |  | EAC-Zulassung |
|-----|--|---------------|

|     |  |                     |
|-----|--|---------------------|
| EAC |  | RU*DE*08.B.01873/19 |
|-----|--|---------------------|

|                  |  |
|------------------|--|
| cULus Recognized |  |
|------------------|--|

|              |  |
|--------------|--|
| cULus Listed |  |
|--------------|--|

## Accessories

### Accessories

#### Device protection

Type 3 surge protection device - PLT-SEC-T3-230-FM-UT - 2907919



Type 2/3 surge protection, consisting of protective plug and base element with screw connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage 230 V AC/DC.

Type 3 surge protection device - PLT-SEC-T3-24-FM-UT - 2907916



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage 24 V AC/DC.

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIN Rail Power Supplies](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[PS-S6024](#) [DVP01PU-S](#) [DVP06AD-S](#) [DVP06XA-S](#) [DVDPNET-SL](#) [DVPDT01-S](#) [DVPPS01](#) [PS-6012](#) [PS9Z-5R1G](#) [PS-C24024](#)  
[DVP08ST11N](#) [DVPACAB530](#) [DVPCOPM-SL](#) [DVPEN01-SL](#) [DVPPF01-S](#) [ADNB008-48-1PM-C](#) [ADNB017-24-1PM-C](#) [ADNB040-24-1PM-C](#) [ADNB034-12-1PM-C](#) [SS14011524](#) [S8TS-06024-E1](#) [PS-UPS40](#) [PSC-6024](#) [PSD-A60W12](#) [96PS-A120WDIN](#) [PSD-A60W48](#) [PSD-A40W12](#) [PSD-A40W24](#) [SMP21-L20-DC24V-5A](#) [PSD-A40W48](#) [S8T-DCBU-02](#) [PS-S4024](#) [NTPS-24-1.3](#) [PST-96024](#) [S82YVSC4P](#) [PS-S4005](#) [PS-10024](#) [PS-S10024](#) [PS-C12024](#) [PSP-480S24](#) [PS-C48024](#) [PSC-2024](#) [PSC-4012](#) [PSC-4048](#) [PSC-9615](#) [PSC-15124](#) [PSC-15148](#)  
[PSC-24148](#) [PSC-48148](#) [TRIO-PS-2G/1AC/12DC/5/C2LP](#)