


**Model 1432
Banana Jack to Pin Tip Plug**



**Model 1432
Banana Jack to Pin Tip Plug**

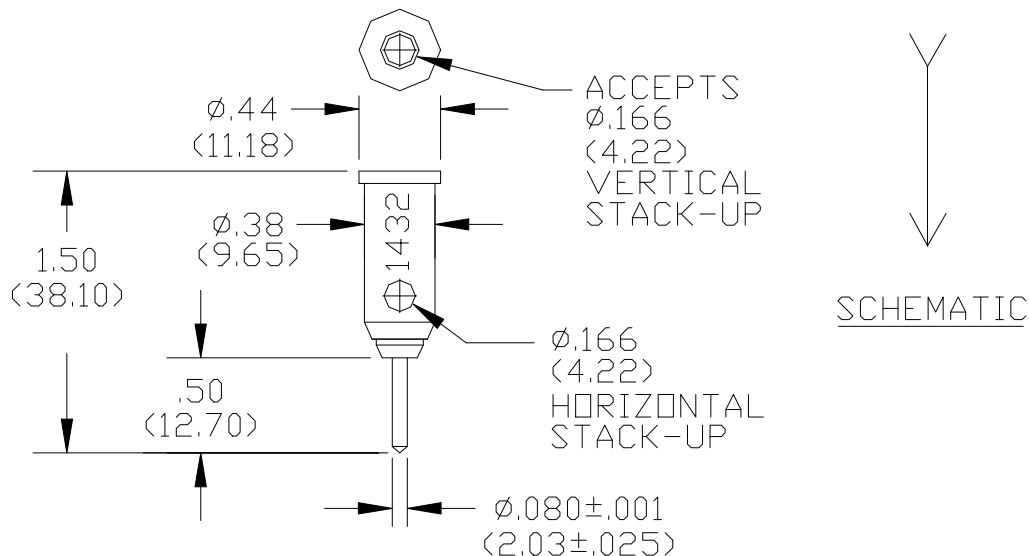

Features

- Permits banana plug cords to be used with equipment having pin tip jacks.

Materials

Banana Jack:

- Material: Brass rod per ASTM B16-85, Temper H02.
- Finish: Nickel plated per QQ-N-290, Class 2, 200/300 micro-inches.

Pin Tip Plug:

- Body: Brass rod per ASTM B16-85, Temper H02.
- Finish: Nickel plate per QQ-N-290, Class 2, 200/300 micro-inches.

Insulation:

- Material: Polypropylene molded to Banana Plug and Pin Tip bodies.
- Marking: "1432, POMONA ELECTRONICS, CALIF."

Specifications

Operating Voltage:

Hands free usage in controlled voltage environments: 3000 Vrms maximum.
For CE compliance: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

Operating Temperature: +50°C (+122°F) Max.
Current: 5 Amperes

Ordering Information

Model: 1432-*

*=Color, -0 (Black), -2 (Red)

Ordering Example: 1432-2 (Color is Red)
Other colors are available upon request.

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[579-0400](#) [66000-7](#) [R644543000](#) [R921923000](#) [R921930000](#) [R941344000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1533-1](#) [174-R825B-EX](#)
[NYS508-BU](#) [NYS508-O](#) [1680](#) [174-R819B-EX](#) [R644543003](#) [R644543004](#) [R644543020](#) [R644543021](#) [R921926000](#) [R921931000](#)
[R921932000](#) [R921934000](#) [R929991000](#) [R941460000](#) [R941461000](#) [R941463600](#) [R941920600](#) [R948160000](#) [31B-2-RED](#) [032-0016-023](#) [105-](#)
[1106-001](#) [108-1000-106](#) [108-2301-621](#) [66001-9](#) [7013](#) [1395080-1](#) [930166100](#) [NYS508-GR](#) [NYS508-V](#) [NYS508-W](#) [NYS508-Y](#) [NYS511-R](#)
[BP30-2BR10-B PKG](#) [BP30-10-WT](#) [BP30-2BR-B PKG](#) [BP30Y-1 PKG](#) [R941049000](#) [R941340000](#) [R921922000](#)