


## Model 4532 Minigator Clips To BNC Male

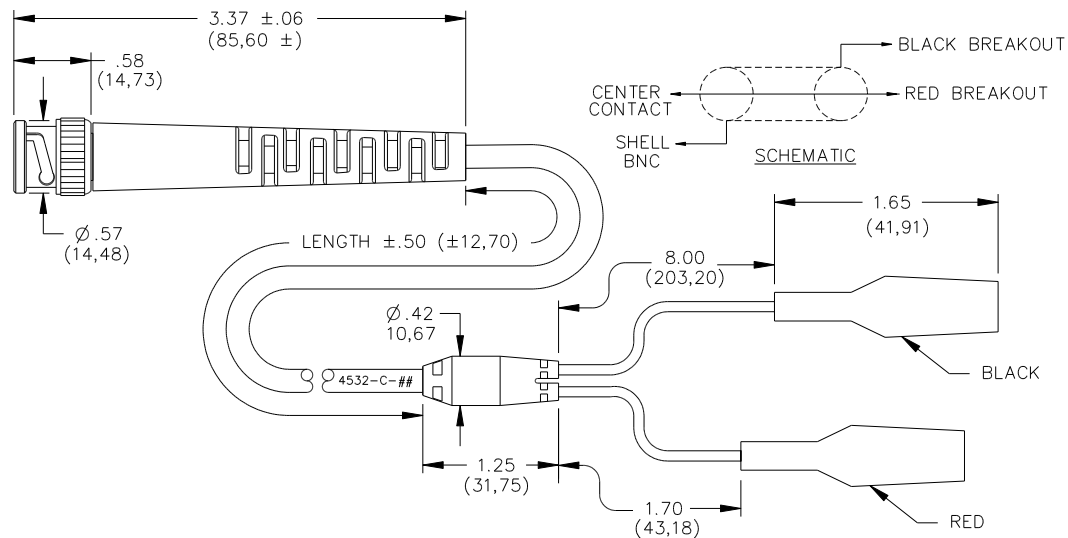

### FEATURES:

- Lengths other than those specified are available upon request.

### MATERIALS:

Conn: 1<sup>st</sup> End-BNC Male

Finish: Body and Fittings, Tarnish Resistant.

Nominal Impedance: 50 Ohms.

Center Contact: Gold plated per MIL-C-39012.

Molded Boot: PVC molded to cable and BNC.

Color: Black

Cable: RG58C/U. (.195) O.D.

Marking: "POMONA 4532-C-XX".

Molded Breakout: PVC molded to breakout leads and cable. Color: Black

Breakout leads: 20 AWG; 41 x 36 tinned copper.

PVC insulated 2.21 (.087) O.D.; Color matches

color of insulator. One Red and one Black.

Conn: 2<sup>nd</sup> End-Insulated Minigator Clips.

Materials: Steel.

Finish: Cadmium plated

Insulators: Vinyl

Colors: Black and Red.

### RATINGS:

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: 45 VRMS/DC

Current: 5 Amperes

**ORDERING INFORMATION:** 4532-C-XX  
XX=Cable Length, Standard Lengths: 24" (610),  
30" (762), 36" (914), 48" (1219), 60" (1524).  
Ordering Example: 4532-C-60 indicates 60" (1524)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

6/9/99

Sales: 800-490-2361 Fax: 888-403-3360  
Technical Assistance: 800-241-2060

SY/EH/LS

W:\pomona\grponly\Datasheet Updates\Updates 2005\d4532\_1\_02.doc

More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Page 1 of 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Test Leads](#) category:*

*Click to view products by [Pomona](#) manufacturer:*

Other Similar products are found below :

[795-2384-10-25](#) [1301430020](#) [15107](#) [1510-24-105](#) [15308](#) [15408](#) [15302](#) [15307](#) [15407](#) [15409](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1927617](#) [2450](#) [2524-A-60](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2524-A-48](#) [2977-J-48](#) [R948131000](#) [380200](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [LB1F-2R-WHT](#) [6345](#) [6432](#) [EM3782-24-3#](#) [R948161002](#) [R948160002](#) [R948170002](#) [R948171002](#) [R948163002](#) [973604100](#) [934160101](#) [934160100](#) [R948174000](#) [CT3269](#) [CT3258](#) [CT3158-100](#) [HSPL 8568/AWG16/200/RT](#) [HSPL 8568/AWG16/200/SW](#) [28.0119-10020](#) [28.0127-05025](#) [28.0127-20025](#)