


Model 4601 Triple Banana Jack, Insulated

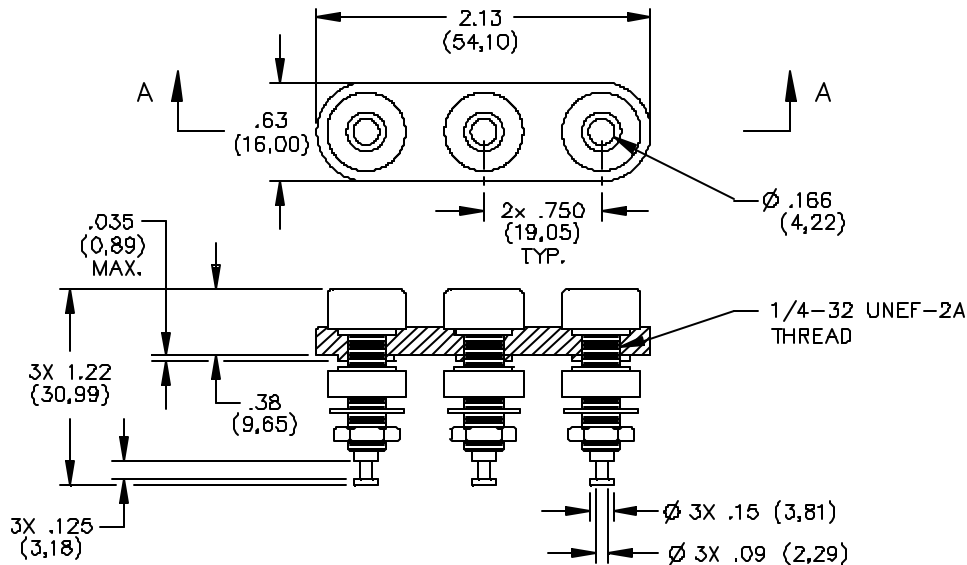

SECTION A-A

FEATURES:

- Closed entry receptacle, 4.2 (.166) dia. x 23.4 (.920) deep.
- Mounts in panels from 1.6 (.063) to 9.5 (.375) thick.
- Nickel plated lock washer and 1/4-32 hex nut.
- Mates to Model #2970.
- Ideal for connection to power supplies with positive, negative and return connections.

MATERIALS:

Banana jack insulation: Polycarbonate molded to banana jack bodies.

Color: One Red, one Black, and one Green.

Mounting Plate: Polycarbonate.

Color: See ordering instructions.

Insulator: Polycarbonate. Color matches color of banana jack insulation.

Lockwasher 1/4 Int tooth:

Material: Steel.

Finish: Nickel plated per QQ-N-290

Hex nut 1/4-32:

Material: Brass.

Finish: Nickel plated per QQ-N-290.

Banana jack body/solder turret:

Material: Brass, per QQ-B-626, Alloy 360,
1/2 Hard.

Finish: Bright tin plated per MIL-T-10727.

RATINGS: (Entire assembly)

Operating Temperature: +115°C. (+239°F.) Max.

Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 2500 WVDC Max.

Current: 15 Amperes

ORDERING INFORMATION: Model 4601-*

*=Color, -0 Black, -2 Red

Ordering Example: 4601-2 Color is Red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[01-2601-4-0210](#) [01-2601-4-0212](#) [01-2604-4-0212](#) [01-2604-5-0210](#) [01-2150-1-0312](#) [01-2350-1-02](#) [01-2352-1-02](#) [01-2368-1-02](#) [01-2604-4-0210](#) [01-2604-5-0212](#) [01-2606-4-0210](#) [01-2606-4-0212](#) [01-2606-5-0212](#) [M39024/10-01G](#) [M39024/10-17G](#) [M39024/11-09G](#) [M39024/11-42](#) [M39024/11-43](#) [M39024/12-08](#) [707-5311](#) [707-5402-01-19](#) [707-5410](#) [923739-40-I](#) [R644543000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1499-101](#) [1533-1](#) [1659559](#) [1659567](#) [1663921](#) [1663939](#) [1696-102](#) [174-R825B-EX](#) [NYS508-BU](#) [NYS508-O](#) [211-101](#) [RS100GBL](#) [RS250GBL](#) [251-102](#) [25-2251-2-03](#) [25-2259-2-03](#) [923743-16-I](#) [923743-24-I](#) [923743-28-I](#) [2854-BLU](#) [2970-BLK](#) [30-443G](#) [1680](#)