


## Model 4684 Adapter – BNC Female To Banana Plug With Ground Lead

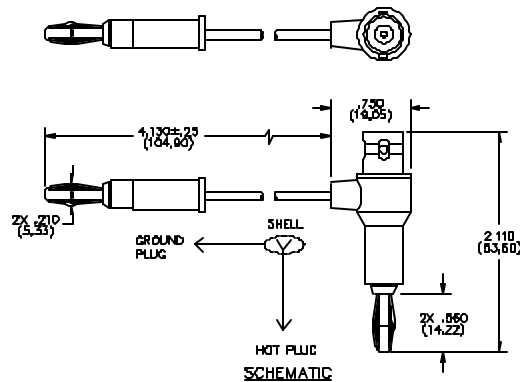

### FEATURES:

- Permits BNC male to be used with equipment having standard banana jacks.
- Allows the ground jack to be located up to 63,5 (2.50) away from the output/input jack.

### MATERIALS:

Upper Conn: BNC Female

Finish: Body – Tarnish resistant.

Center Contact – Gold plated per requirements of MIL-C-39012.

Insulation: Polypropylene molded to connector, plug body and wire.

Color: Red.

Marking: “POMONA 4684.”

Ground Lead: In-line Banana Plug. Spring – Beryllium Copper per QQ-C-533, Alloy 172,

Cond. H.T.

Material: Body – Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Wire: 18 AWG, stranding 65 x 36 t.c., PVC insulated, 3.66 (.144) O.D.

Color: Black

Banana Plug Insulation: Polypropylene molded to plug body and wire.

Color: Black.

Lower Conn: Banana Plug

Material: Spring – Beryllium Copper per QQ-C-533, Alloy 172, Cond. H.T.

Body – Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

### RATINGS:

Operating Temperature: +55° C. (+131° F.) Max.

Voltage: Hand-held Testing: 30VAC/60VEDC Max.

Hand Free Testing in Controlled Voltage Environments: 500 VRMS Max.

### ORDERING INFORMATION: Model 4684

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Test Leads](#) category:*

*Click to view products by [Pomona](#) manufacturer:*

Other Similar products are found below :

[795-2384-10-25](#) [1301430020](#) [15107](#) [1510-24-105](#) [15308](#) [15408](#) [15302](#) [15307](#) [15407](#) [15409](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1927617](#) [2450](#) [2524-A-60](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2524-A-48](#) [2977-J-48](#) [R948131000](#) [380200](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [LB1F-2R-WHT](#) [6345](#) [6432](#) [EM3782-24-3#](#) [R948161002](#) [R948160002](#) [R948170002](#) [R948171002](#) [R948163002](#) [973604100](#) [934160101](#) [934160100](#) [R948174000](#) [CT3269](#) [CT3258](#) [CT3158-100](#) [HSPL 8568/AWG16/200/RT](#) [HSPL 8568/AWG16/200/SW](#) [28.0119-10020](#) [28.0127-05025](#) [28.0127-20025](#)