


Model 5053 Micrograbber® Test Clip To Stacking Banana Plug

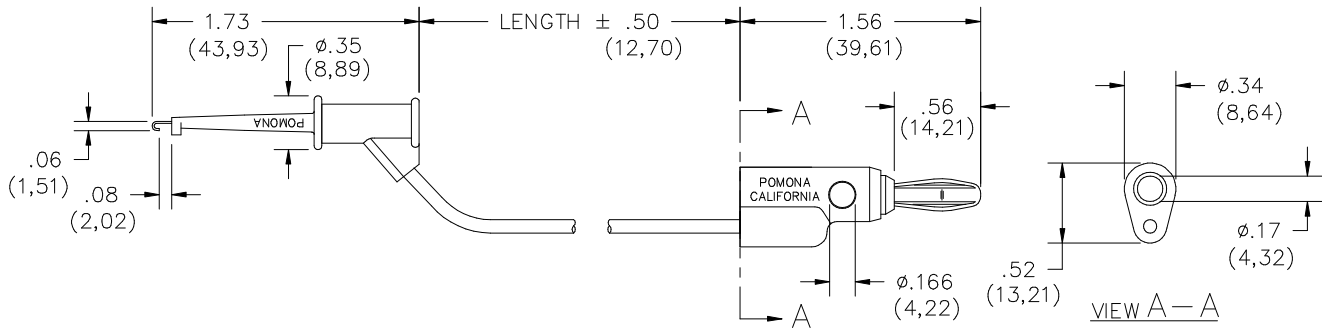

FEATURES:

- Banana Plug is cross stackable and vertical stackable.
- Ideal for connecting test equipment to small circuit board components.
- Banana Plug will mate to Model #1581 or any standard Banana Jack.

MATERIALS:

Conn: 1st End - Micrograbber®

Material: Contact – Beryllium Copper, Alloy 165 per QQ-C-533, ¼ HM.

Spring – Stainless steel, 302.

Finish: Contact – Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel.

Insulation: Glass filled nylon molded to contact and wire. Color matches color of wire.

Marking: “POMONA ELECTRONICS” “MICROGRABBER®.”

Wire: 20 AWG stranding 41 x 36 t.c., PVC insulated 2.21 (.087) O.D.

Marking: “POMONA 5053-*”.

Color: See Ordering Information.

Conn: 2nd End – Stacking Banana Plug

Material: Spring – Beryllium Copper, Berylco 25 per QQ-C-533, cond. HT.

Plug Body – Brass per QQ-B-626, Alloy 360, ½ hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Insulation: Polypropylene molded to plug body and wire. Color matches color of wire.

RATINGS:

Operating Temperature: +55°C (+131°F) Max.

Operating Voltage: 150 VRMS/DC

Current: 3 Amperes

ORDERING INFORMATION: Model 5053-XX-*

XX = Cable Lengths, Standard Lengths: 24” (610mm), 36” (914mm), & 48” (1219mm)

Additional lengths and colors can be quoted upon request.

*= Color, -0 Black, -2 Red

Ordering Example: 5053-36-2 Indicates 36” in length, color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[795-2384-10-25](#) [1301430020](#) [1510-24-105](#) [15308](#) [15408](#) [15302](#) [15409](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1927617](#) [2450](#)
[2524-A-60](#) [924961-C](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2524-A-48](#) [2977-J-48](#) [R948131000](#) [380200](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#)
[BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [LB1F-2R-WHT](#) [6345](#) [6432](#) [EM3782-24-3#](#) [R948161002](#) [R948160002](#)
[R948170002](#) [R948171002](#) [R948163002](#) [973604100](#) [934160101](#) [934160100](#) [R948174000](#) [CT3269](#) [CT3258](#) [CT3158-100](#) [HSPL](#)
[8568/AWG16/200/RT](#) [HSPL](#) [8568/AWG16/200/SW](#) [28.0119-10020](#) [28.0127-05025](#) [28.0127-20025](#) [49.0079-20021](#) [49.0079-20024](#)