


Model 5286 Connector BNC (M), Crimp, RG 59

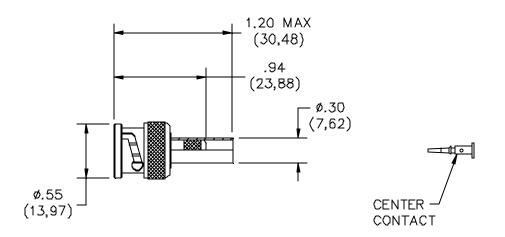

FEATURES:

- Connector accepts types RG/U: 59, 59A, 59B, 62, 62A, 62B, 62C, and 210.
- Connector meets interface requirements of MIL-STD-348.

MATERIALS:

Body: Brass, Tarnish Resistant Plating Center Contact: Male: Gold Plated Brass

Female: Gold Plated Beryllium Copper

Gasket - Silicone Rubber

Dielectric: PTFE

Marking: "POMONA 5286"

RATINGS:

Operating Voltage: 500 VRMS Max. Nominal Impedance: 75 Ohms

ORDERING INFORMATION: Model 5286

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

> Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060

7/2/02 SY/EH/LS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Connectors / Coaxial Connectors category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

8915-1511-000 89674-0827 6001-7071-019 6002-7051-003 6002-7551-202 6059674-1 619550-1 630059-000 M39030/3-01N M3933/25-36N 6500-7071-046 6769 CX050L2AQ 7002-1542-011 7004-1512-000 7009-1511-004 7010-1511-000 7029-1511-060 7101-1541-010 7101-1571-002 7105-1521-002 7145-1521-002 7203-1571-003 7209-1511-011 7210-1511-015 7210-1511-019 73137-5015 73216-2241 7325-1512-000 73404-2300 7405-1521-005 7405-1521-802 7406-1521-005 8527 8547 FS11V 8808-1511-001 9049-9513-000 9074-9513-000 9101-9573-002 910A205F 9130-9573-002 PL11SC-026 PL375-33 PL40-5 PL71-9 PL74C-221 PL75MC-217 PL803-7 980-8666-005