


NOTES:
 1:100% short,open and miss wire test.
 2:Insulation resistance:DC200V 10MΩ(Min)
 Conduction resistance 5Ω(Max)
 3:Screws need to install in the P1 side.

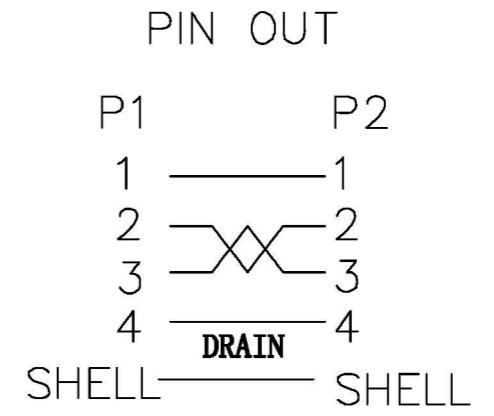

⑦	SCREW	THUMB SCREW #4-40*15	2	PCS
⑥	NUT	NUT-NICKEL PLATED #4-40	2	PCS
⑤	OUTER MOLDED	BLACK 45P PVC	0.024	KG
④	INNER MOLDED	LDPE	0.024	KG
③	CONNECTOR	USB A/FEMALE,GOLD PLATED PIN,NICKEL PLATED SHELL,WHITE INSULATION	1	PCS
②	CONNECTOR	USB B/FEMALE,GOLD PLATED PIN,NICKEL PLATED SHELL,WHITE INSULATION	1	PCS
①	CABLE	UL2725 28AWG*1P+24AWG*2C+AL-FOIL+D(7/0.12BC)+BRAID(64/0.1CCS) BLACK PVC JACKET,OD;∅4.8±0.2MM	220	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference		
Designed by ACHY	Checked by HELEN	Approved by - date OCT 31.2013	File name USB AF/BF 0.135M	Date OCT 31.2013	Scale FREE
ANGLE:			ADAPTOR LEAD, USB B TO A, SOCKETS, 135MM		
UNIT:MM			AV23286(PSG03801)	Edition 1	Sheet 1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pro Signal manufacturer](#):

Other Similar products are found below :

[ABI-025-RC](#) [PSG90965](#) [PS11188](#) [PS11183](#) [PS11170](#) [SPC22827](#) [PSG91666](#) [PSG08382](#) [PSG91439](#) [MC34959](#) [S78WHB](#) [PSG91128](#)
[PS11186](#) [PS11067](#) [PS11027](#) [PS000166](#) [PSG91527](#) [PSG91551](#) [PSG91684](#) [PSG03122](#) [PSG00057](#) [PSG91276](#) [PSG03106](#) [PSG91602](#)
[JR9503/2M-ROHS](#) [SVP676-1M](#) [SVC675S-50M](#) [PS11204](#) [SVC675S-15M](#) [PSG00812](#) [PS000122](#) [PSG91678](#) [PSG91680](#) [PSG91686](#)
[PSG03835](#) [PSG04125](#) [KVM-404](#) [JR9901/2M](#) [SPC23208](#) [SPC23203](#) [SPC22887](#) [PSG90825](#) [PSG01478](#) [PSG01458](#) [PSG01090](#) [PS11145](#)
[PS11072](#) [PS11207](#) [UT-899224](#) [PSG90555](#)