

SPECIFICATIONS					
PARAMETERS	VALUES	UNIT			
DIRECTIVITY	NOISE CANCEL	-			
SENSITIVTY	-54 ± 4	dB			
STANDARD OPERATING VOLTAGE	1.5	Vdc			
MAX OPERATING VOLTAGE	10	Vdc			
CURRENT CONSUMPTION (MAX)	0.5	mA			
IMPEDANCE	0.68	KOhm			
SIGNAL TO NOISE RATIO (MIN.)	55	dB			
TERMINAL	SOLDER PADS	-			
INTERNAL CAPACITOR	N/A	pF			

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED. ©2003, Projects Unlimited Inc.

REVISION HISTORY								
LTR	DESCRIPTION	DATE	APPROVED					
-	RELEASED FROM ENGINEERING	7/10/2013						
Α	REVISED TO INVENTOR 3-D DRAWIING TEMPLATE	8/13/2013	B.R.					

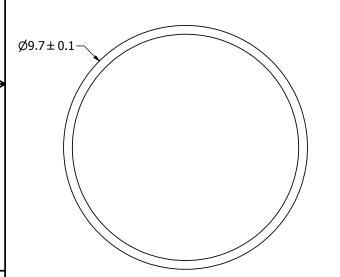

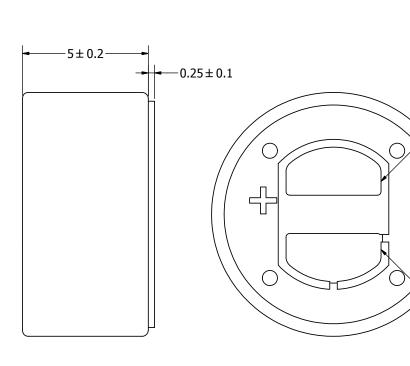

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2011/65/EU COMPLIANT.
- 4. THIS PART IS BACK ELECTRET.

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN	SIZE
MILLIMETERS,	
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A3
	ack Electret).idw

<b>DUI</b>		AN	ANM-5054L-2-R (Back Electret)				
	J.D.	7/10/2013	M.L.	7/10/2013	B.R.	7/10/2013	8/13/2013
ı	Designed by	Date	Спескеа ву	Date	Approved by	Date	Drawn Date

-TERM. 1 (+)

-TERM. 2 (-)

Edition Microphone 1/1

Drawn Date

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Microphones category:

Click to view products by PUI Audio manufacturer:

Other Similar products are found below:

BCM4013OLFC-42-JST-ZHR-2 TO38-30702-B20 SPM04C-38/1186-T/R BCM4013OSBC-42 LF TOW-1242P-R BCM9745-44 BCM9765
BCM9767P LD-MC-0905P LD-MC-6035 PMOF-9745S-42UQ ROM-2235L-HD-R CMC-4015-130T CMC-6050-40T CMC-6035-130T
CMC-6015-47P BCM9745P-44 BCM9767-42 254-ECM644-RO LD-MC-4011 LD-MC-6027 LD-MC-6035W LD-MC-9765P LD-MC9765W FG-23629-D65 PNR-23539-000 254-FP270-RO BCM9765P-44 CMC-5042PF-AC CMC-6010-42L100 CMC-9745-L100 CMC3015-44T CMC-4015-25T CMC-6013-38T CMC-6022-37L100 CMC-6027-24T CMC-6027-32T CMC-6027-42T GMI4522P-2C-30db
GMI4522P-2C-50db GMI4522P-2C-52db GMI6027P-2C66DB GMA3526H10-B26 GMA4030H11-F26 GMI4015-32DB GMI4015-40DB
GMI4015P-36DB GMI4015P-46DB GMI4015P-54DB GMI4015P-58DB