


# SMT Power Inductor

High Current Molded Power Inductor - PA4547.XXXNLT Series



- Height: 1.5mm Max
- Footprint: 3.8mm x 3.7mm Max
- Current Rating: up to 5.5A
- Inductance Range: 0.47uH to 10.0uH
- High current, low DCR, and high efficiency
- High reliability
- Minimized acoustic noise and minimized leakage flux noise

Electrical Specifications @ 25°C - Operating Temperature -55°C to +125°C

| Part Number   | Inductance<br>100KHz, 1.0V | Rated Current | DC Resistance |      | Saturation Current |
|---------------|----------------------------|---------------|---------------|------|--------------------|
|               |                            |               | MAX.          | TYP. |                    |
|               | uH±20%                     | A             | mΩ            | mΩ   | A                  |
| PA4547.471NLT | 0.47                       | 5.50          | 28            | 23.3 | 8.0                |
| PA4547.561NLT | 0.56                       | 5.00          | 33            | 28   | 7.2                |
| PA4547.681NLT | 0.68                       | 4.50          | 42            | 34   | 6.5                |
| PA4547.102NLT | 1.00                       | 3.60          | 50            | 41   | 5.8                |
| PA4547.152NLT | 1.50                       | 3.40          | 77            | 64   | 4.0                |
| PA4547.222NLT | 2.20                       | 3.20          | 98            | 82   | 3.8                |
| PA4547.332NLT | 3.30                       | 2.50          | 205           | 170  | 3.2                |
| PA4547.472NLT | 4.70                       | 1.90          | 264           | 220  | 2.8                |
| PA4547.562NLT | 5.60                       | 1.70          | 318           | 265  | 2.3                |
| PA4547.682NLT | 6.80                       | 1.50          | 348           | 290  | 2.0                |
| PA4547.822NLT | 8.20                       | 1.30          | 468           | 390  | 1.8                |
| PA4547.103NLT | 10.00                      | 1.20          | 522           | 435  | 1.6                |

# SMT Power Inductor

High Current Molded Power Inductor - PA4547.XXXNLT Series




**Notes:**

1. Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
2. The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
3. The rated current is the DC current required to raise the component temperature by approximately 40°C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
4. The part temperature (ambient+temp rise) should not exceed 125°C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

## Mechanical


PA4547.XXXNLT

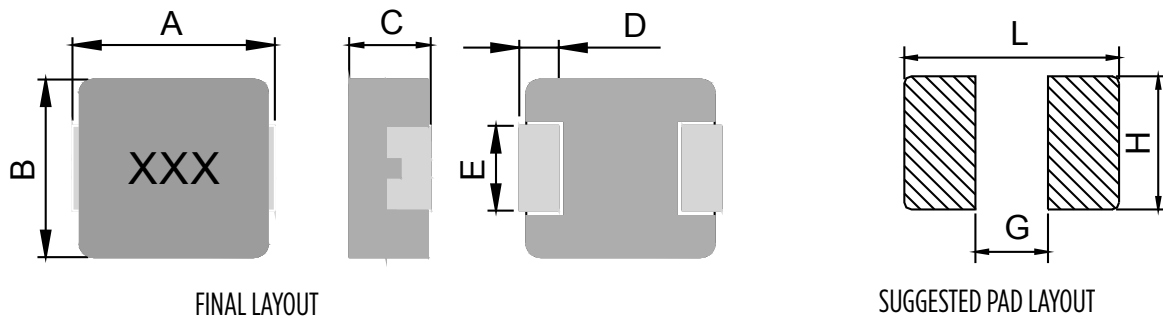

| Series        | A       | B       | C       | D       | E       | L   | G   | H    |
|---------------|---------|---------|---------|---------|---------|-----|-----|------|
| PA4547.XXXNLT | 3.5±0.3 | 3.2±0.2 | 1.3±0.2 | 0.7±0.2 | 1.2±0.2 | 4.1 | 1.9 | 1.45 |

All Dimensions in mm.

## TAPE & REEL INFO

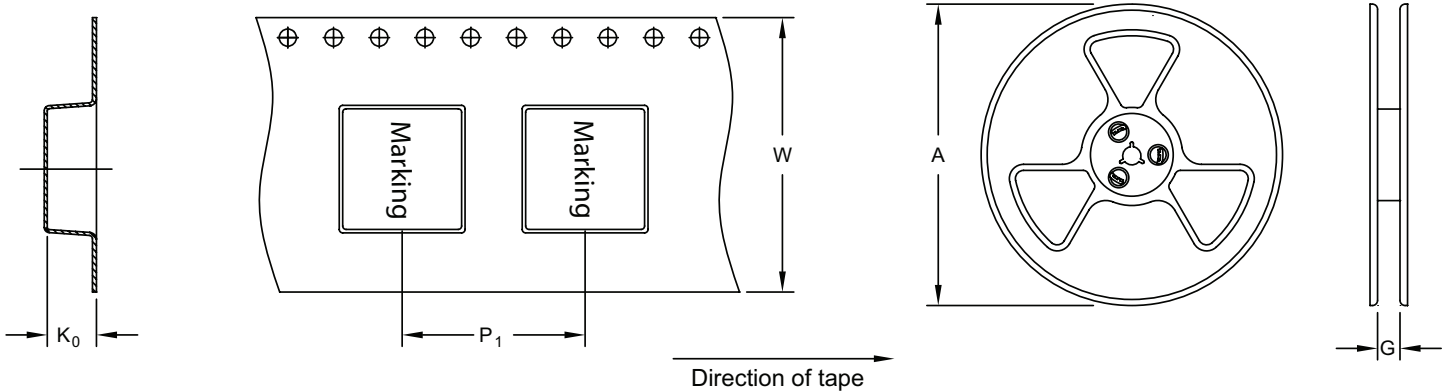







| SURFACE MOUNTING TYPE, REEL/TAPE LIST |                |      |                |    |       |          |
|---------------------------------------|----------------|------|----------------|----|-------|----------|
|                                       | REEL SIZE (mm) |      | TAPE SIZE (mm) |    |       | QTY      |
|                                       | A              | G    | $P_1$          | W  | $K_0$ | PCS/REEL |
| PA4547.XXXNLT                         | Ø330           | 12.4 | 8              | 12 | 1.8   | 3000     |

# SMT Power Inductor

High Current Molded Power Inductor - PA4547.XXXNLT Series









## Typical Performance Curves

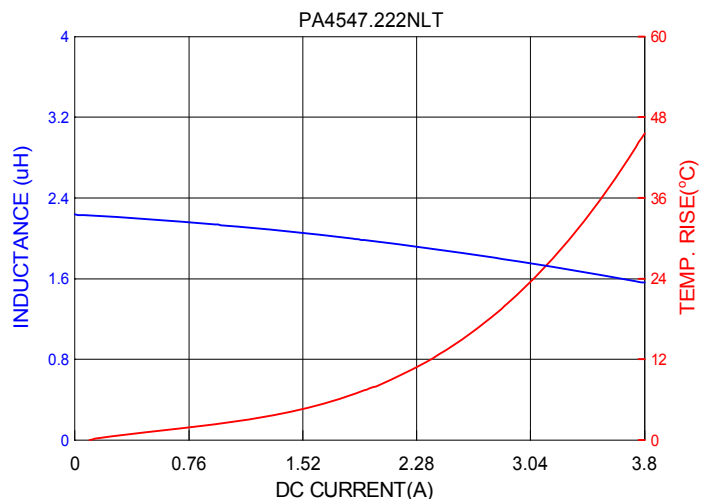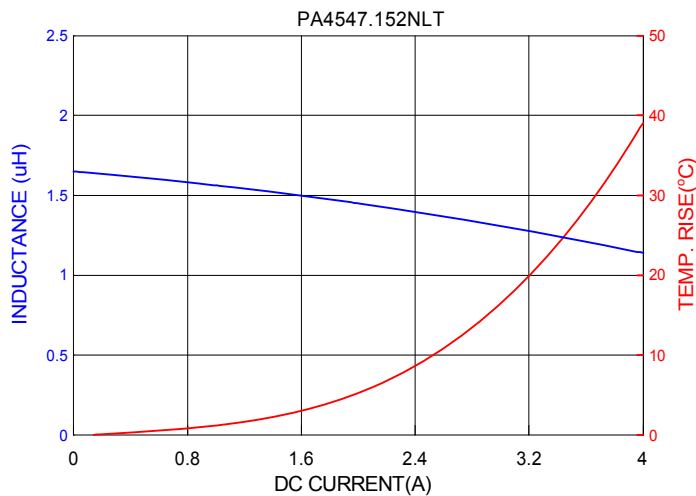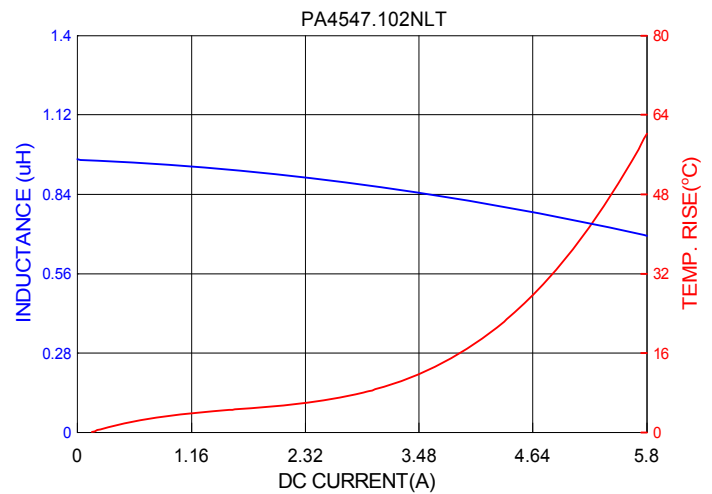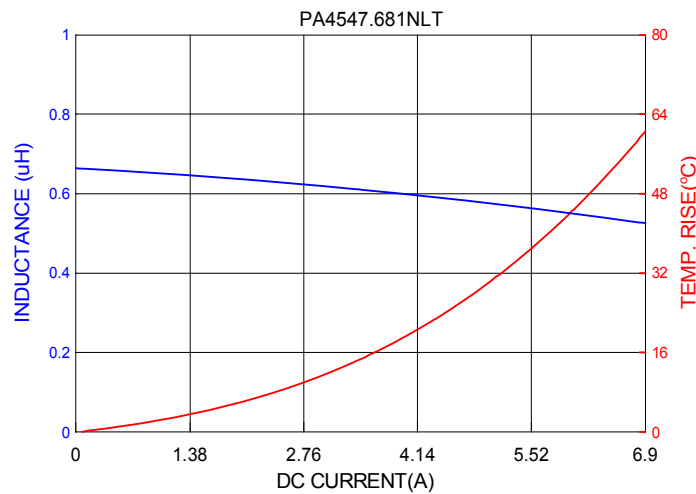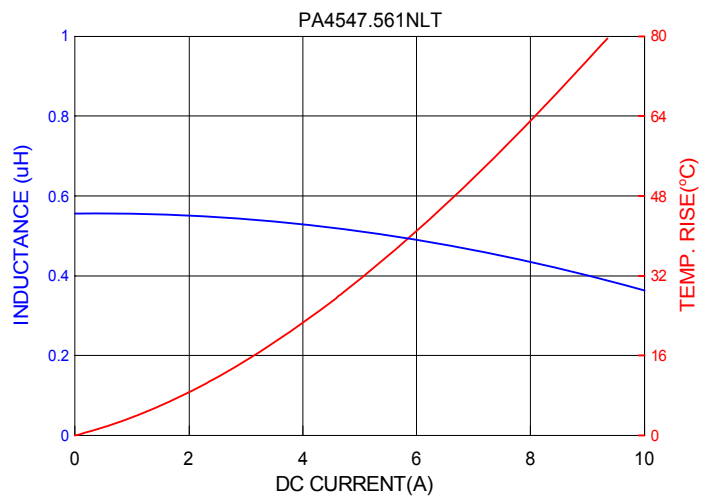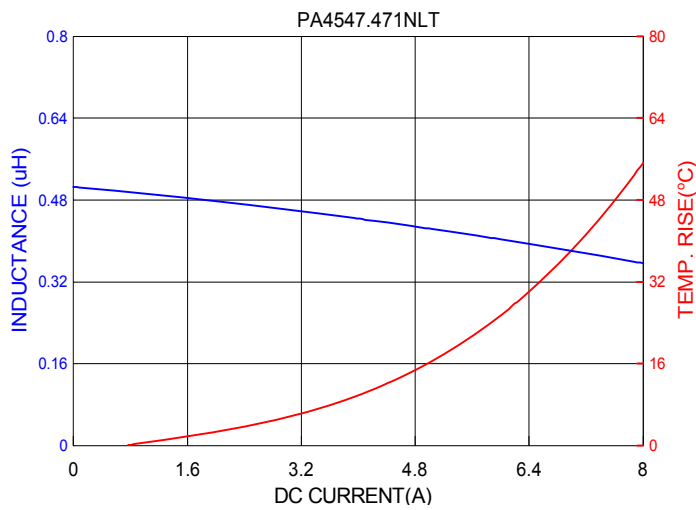

# SMT Power Inductor

High Current Molded Power Inductor - PA4547.XXXNLT Series

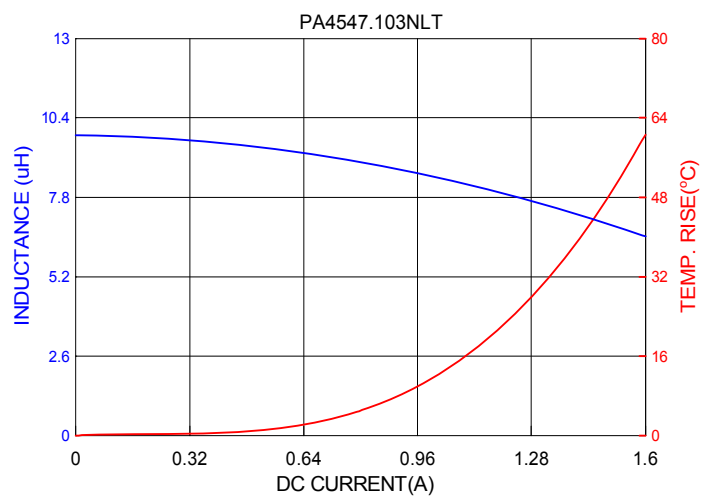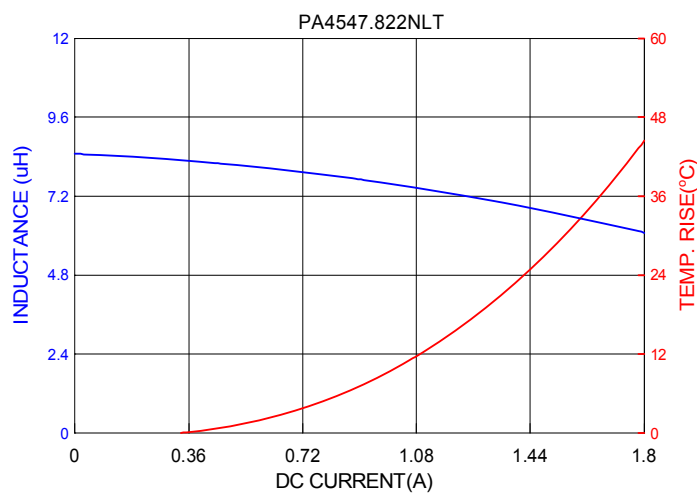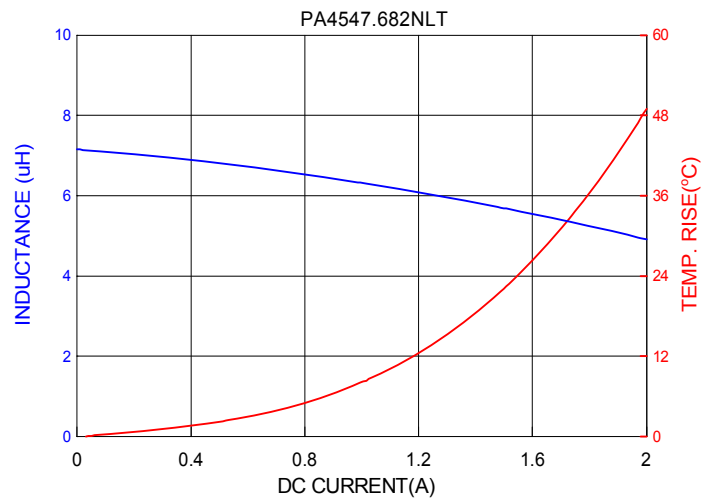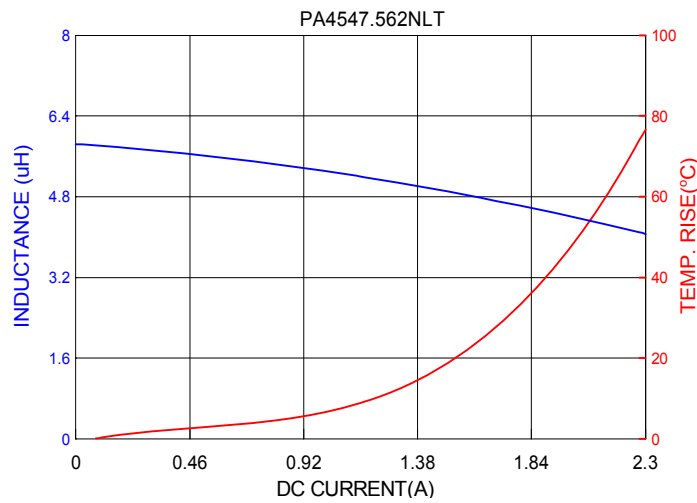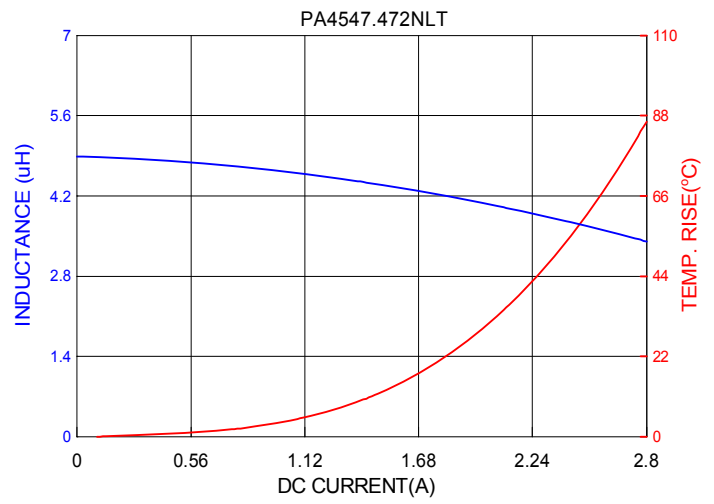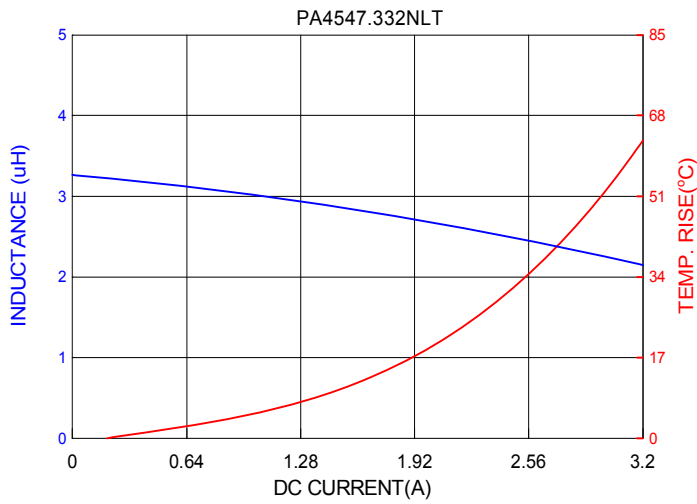

# SMT Power Inductor

High Current Molded Power Inductor - PA4547.XXXNLT Series



---

## For More Information

### **Pulse Worldwide Headquarters**

15255 Innovation Drive Ste 100  
San Diego, CA 92128  
U.S.A.

Tel: 858 674 8100  
Fax: 858 674 8262

### **Pulse Europe**

Pulse Electronics GmbH  
Am Rottland 12  
58540 Meinerzhagen  
Germany

Tel: 49 2354 777 100  
Fax: 49 2354 777 168

### **Pulse China Headquarters**

Pulse Electronics (ShenZhen) CO., LTD  
D708, Shenzhen Academy of  
Aerospace Technology,  
The 10th Keji South Road,  
Nanshan District, Shenzhen,  
P.R. China 518057

Tel: 86 755 33966678  
Fax: 86 755 33966700

### **Pulse North China**

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

Tel: 86 21 62787060  
Fax: 86 2162786973

### **Pulse South Asia**

135 Joo Seng Road  
#03-02  
PM Industrial Bldg.  
Singapore 368363

Tel: 65 6287 8998  
Fax: 65 6280 0080

### **Pulse North Asia**

1F., No.111 Xiyuan Rd  
Zhongli City  
Taoyuan City 32057  
Taiwan (R.O.C)

Tel: 886 3 4356768  
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2017. Pulse Electronics, Inc. All rights reserved.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pulse manufacturer](#):*

Other Similar products are found below :

[ICEFIN806DMN](#) [ICEFIN698/869DMN](#) [PH9085.011NL](#) [PE-0603CD060KTT](#) [PH9185.034NLT](#) [H1086NLT](#) [P0182T](#) [PA1494.442NL](#) [PE-0805CD030KTT](#) [PE-53363NLT](#) [23Z106SM-T](#) [HX5400NL](#) [JXD0-4005NL](#) [ST6200QNL](#) [T3001NL](#) [HX2019](#) [PE-67540NL](#) [PE-65968NL](#) [PE-65535NL](#) [T1142NLT](#) [H7019FNL](#) [P0841NL](#) [P0438T](#) [P0584](#) [P0752.474T](#) [P1167.154T](#) [STQN1553-45](#) [JY0-0016NL](#) [JG0-0098NL](#) [JG0-0025NL](#) [J20-0014NL](#) [W1911](#) [HFB075100A](#) [HX6101NL](#) [JXD1-0025NL](#) [RO2408NMD](#) [P0469NL](#) [P0841SNLT](#) [PB2134NL](#) [ST2-12B42](#) [PE-0805CM331JTT](#) [PE-51509NL](#) [53119](#) [J3026G01DNL](#) [100B-1001XNL](#) [P0849SNL](#) [W3012-K](#) [HX5020NL](#) [HX5201NL](#) [PE-68210NL](#)