




Series
EPX

SIZE 22 CRIMP PIN CONTACT FOR 28-30 AWG CABLE

Issue:
MARCH 16, 2004

Page
1/1

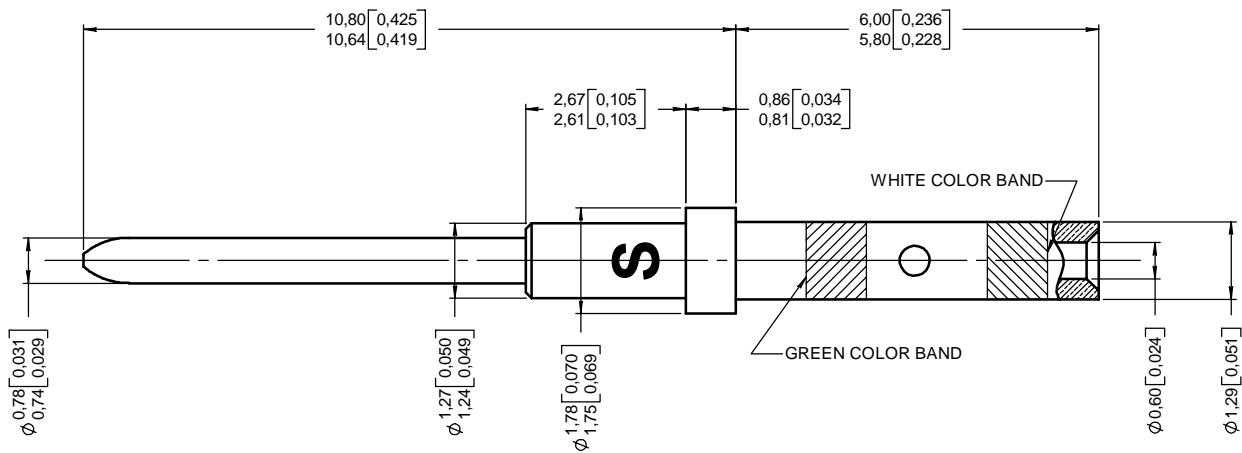

MATERIAL :
COPPER ALLOY (C97)

FINISH :
GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D CLASS 1 50 MICRINCHES OVER NICKEL PLATE PER QQ-N-290

WIRES ACCOMODATED : AWG 28-30
INSULATOR DIAMETER : .055 MAX (1,40)
STRIP LENGHT : .138 (3,50)

CRIMP CONTACT TENSILE REQUIREMENTS USING MIL SPEC TOOLING AND WIRE SPEC
M22520/2-01 22GA. 11 LBS (5,5 daN)

CRIMPED CONTACTS WILL SHOW NO CRACK WHEN INSPECTED PER MIL-C-22520 AT 10X

RADIALL TOOLING RECOMMANDATION
CRIMPING TOOL : M22520/2-01 (RADIALL 282 281)
SELECTOR POSITION : 5 FOR AWG 28
4 FOR AWG 30
POSITIONNER : M22520/2-23 (RADIALL 282 970)

INSERTION/EXTRACTION TOOL : M81969/1-01 (RADIALL 282 885)
SPL RADIALL INS. 282 880 / EXT. 282 890

DIMENSIONS : mm (Inch) -

This information is given as an indication in the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION				
PEN:				
NOM: /				
DATE: 08/02/90				
APPR.: /	16/03/04	REDRAWN IN ENGLISH	LEGENDRE	L.Garcia
	Issue	Revisions	Name	Approved

617201EN

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)
[6651788-1](#) [696475-1](#) [702-32-01109](#) [703-25-02205](#) [73000005059](#) [73000005642](#) [73080255059](#) [73080965046](#) [765-15-0080A](#) [765-16-0080B](#)
[765-18-0080D](#) [829992-1](#) [902-77-02113](#) [PS00/A0620/6300](#) [PS25/A0420/63](#) [129-1J](#) [1409400](#) [AN0024023](#) [E6374G1](#) [e6389g2](#) [157-43GW8](#)
[MS3117-14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-](#)
[W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#) [KA8102](#)