

SC

MULTIMODE FIBER OPTIC CONNECTOR


outer plug body and boot : color beige

Packaging :
1

F 7 2 8 0 0 3 7 0 0

Packaging :
100

F 7 2 8 1 0 3 7 0 0

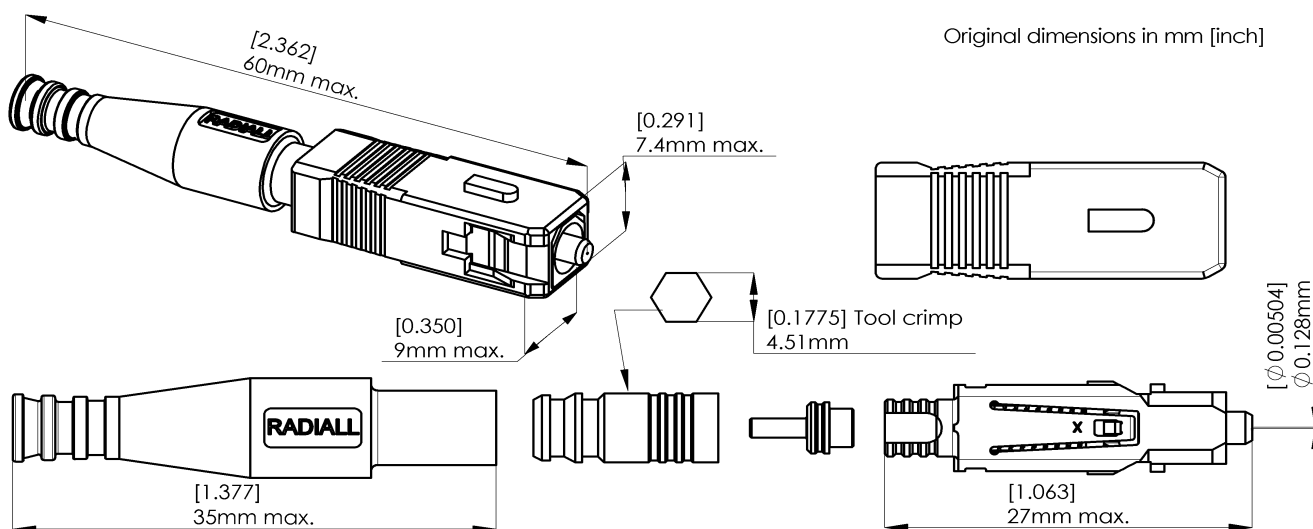

GENERAL

Type : IEC 61754-4 type SC
Multimode zirconia ceramic ferrule (20mm pre-radius)
Push-pull latching system
Floating ferrule
360° tunable (adjustable to 6 positions for optimization of random insertion loss)

Ferrule size : 128µm
Fiber size : 50/125; 62,5/125µm multimode

Cable : DIA 2,7 to 3mm cable, tight or semi loose structure

Cabling proc. : Refer to 503 08 400 (D 6121 oe) assembly instruction manual

CHARACTERISTICS (Dependant on fiber or cable construction)

Optical : Attenuation at 850 and 1310nm with LED source, at EMD condition

		STD		
	mean	< 0,20 dB		(Attenuation plug mated with reference plug IEC 61300-3-4)
	standard deviation	0,08 dB		
	max.	< 0,75dB, 95%		(Attenuation of random mated connectors IEC 61300-3-4)
	mean	0,25 dB		
	Repeatability	0,10 dB		(Maximum loss variation, IEC 61300-2-2)
	Return loss	>20 dB		(IEC 61300-3-6)

Mechanical : Mechanical endurance 200 matings
Cable retention 100N
Environmental : Temperature range (storage/operating) -40°C to +85°C / -40°C to +70°C

(Performance and specification: see document GEN - F728 001)

CREATION						RADIALL 101, rue P. Hoffmann - Z.I. Ouest 93116 ROSNY / BOIS Cedex-France Phone : (0033) 149353535 Fax : (0033) 48546363	
N° :							
PEN/EP : CAT.							
Name : PB							
Date : 11 Aug. 99							
App. : LV	Issue	Revisions	Name	App.			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Connectors](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[0004700001](#) [6100-R](#) [6313](#) [F709034706](#) [F709722200](#) [F709730000](#) [F718183204](#) [F727403500](#) [F727752800](#) [8119](#) [9440F20-27S-190](#) [944-120-6001](#) [9441F10SL-3S](#) [9444W28-21S](#) [9444W36-10S](#) [9446F10SL-4S](#) [9446W20-16S](#) [953-101-5310-P](#) [954-101-57202B](#) [A0270169](#) [12-9122](#) [12-5702](#) [AX101713](#) [AX102420](#) [AX103923](#) [AX104024](#) [AX104193](#) [AX104230](#) [AX104498](#) [AX104562](#) [AX105203-B25](#) [AX105205-S1](#) [EHSC2M](#) [181-011-126](#) [181-011-S](#) [181-057-126](#) [HRFC-R2\(40\)](#) [NKSOPBUY](#) [20500002116](#) [2064996-1](#) [20800001065](#) [2170](#) [9132](#) [2612](#) [2620](#) [9291](#) [9440F16-10S](#) [9440F20-18S](#) [9442W14S-10P](#) [9446F16-10S-190](#)