



No.390, Yong He Road,  
Shanghai 200072, China

## TECHNICAL DATA SHEET CABLE ASSEMBLY

PART NUMBER :R284C0351020

Issue : NA

Date : NA


Customer : Radio Spares

Specification : NA

Issue : NA

Date : N/A

All dimensions are in mm

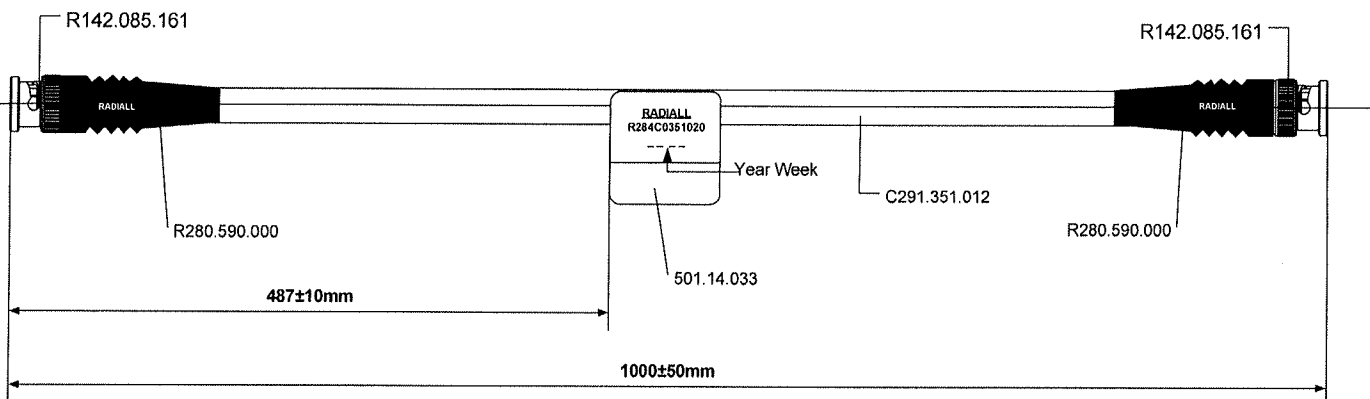

Connectors designation :

Connector 1 : BNC Straight Plug Crimp Type  
Cable 6/75+93 (R142.085.161)

Connector 2 : BNC Straight Plug Crimp Type  
Cable 6/75+93 (R142.085.161)

Cable designation :

Flexible Cable 6/75S (KX6A)

C291.351.012

Nominal length :

Lg: 1000 mm

Cable colour :

Green

Outer diameter :

6.10 mm

Accessories :

Plastic Boots (R280.590.000)

### ELECTRICAL CHARACTERISTICS :

#### High Frequency

Characteristic impedance :  $75 \pm 2$  Ohms

Frequency range : DC-1GHz

Insertion Loss : 0.68 dB max @ 1GHz & 20° C

VSWR. : TBT

#### Low Frequency

Insulation Resistance : 5000 MOhms min

Voltage Rating : 500 Veff max

### MECHANICAL CHARACTERISTICS :

Recommend min. bend radius : 15 mm

Cable crush resistance : NA

Life ( connectors ) : 100 cycles

### ENVIRONMENTAL CHARACTERISTICS :

Operating temperature range : -35° C to +70° C

Remark : NA

Attachment : R142.085.161-TDS ,

C291.351.012 (KX6A)-TDS

Cable Assembly is RoHS compliant.

### CUSTOMER'S APPROVAL

Service or  
Company's stamp

Name

Date

Willy

A

2007-5-16

Creation

Garet Xie

Name

Issue

Date

Modification

Checked by

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Cable Assemblies](#) category:*

*Click to view products by [Radiall](#) manufacturer:*

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)  
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-](#)  
[003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-](#)  
[48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#)  
[TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#)  
[R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#)