

**Technical Data Sheet** 

SPDT Ramses SMA 26.5GHz Failsafe 12Vdc TTL Diodes Pins Terminals


PAGE 1/2 ISSUE 09-03-21			09-03-21	SERIE : SPDT		PART NUMBER : <b>R570F12100</b>			
<u>RF C</u>		STICS							
	_								
	Frequency ra	ange		: 0 - 26.5 GHz : 50 Ohms					
	Impedance								
	Frequency (GHz)		DC - 3	3 - 8	8 - 12.4	12.4 - 18	18 - 26.5		
	VSWR max		1.10	1.20	1.20	1.40	1.50		
	Insertion loss max		0.15 dB	0.20 dB	0.25 dB	0.35 dB	0.50 dB		
	Isolation min Average power (*)		80 dB 240 W	75 dB 150 W	65 dB 120 W	60 dB 100 W	55 dB 40 W		
	rttolago pot		2.011		.20 11	100 11	.0	1	
ELEC	CTRICAL CHA	RACTERIST	<u>FICS</u>						
	Astronom								
	Actuator Nominal curr	rent **			FAILSAFE 250 mA				
	Actuator volt				12V (10.2 to	o 13V)			
	Terminals				solder pins (250°C max. / 30 sec.)				
	TTL inputs (	-				/ 800µA at 5.			
		- Low	level	:	0 to 0.8 V / :	20µA at 0.8 V	1		
MEC	HANICAL CH	ARACTERIS	TICS						
	Connectors		: SMA female per MIL-C 39012						
	Life			: 10 million cycles					
	Switching Time***			: < 10 ms					
	Construction Weight			∶ Splashproof ∶ < 45 g					
	Weight				< <del>4</del> 5 g				
<u>ENVI</u>	IRONMENTAL		ERISTICS						
	Operating te	mperature ra	ande		-40°C to +8	5°C			
	Storage temperature range				-55°C to +8				
								ROHS	
(4)								$(\cdot ( \mathbf{M} ) \cdot )$	
(* (**	Average pov		er RF Path)						
	At 25° C ±10	)%) age ; 25° C)						MPLIA	
( (***		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~							
( (***	Norminal von	<b>o</b> · · · ,							
( (***	Nominar voi	<u> </u>							
(***	Nominal voi								
(***	Nominal void								
(***									

It is document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior writte agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.



## **Technical Data Sheet**

SPDT Ramses SMA 26.5GHz Failsafe 12Vdc TTL Diodes Pins Terminals

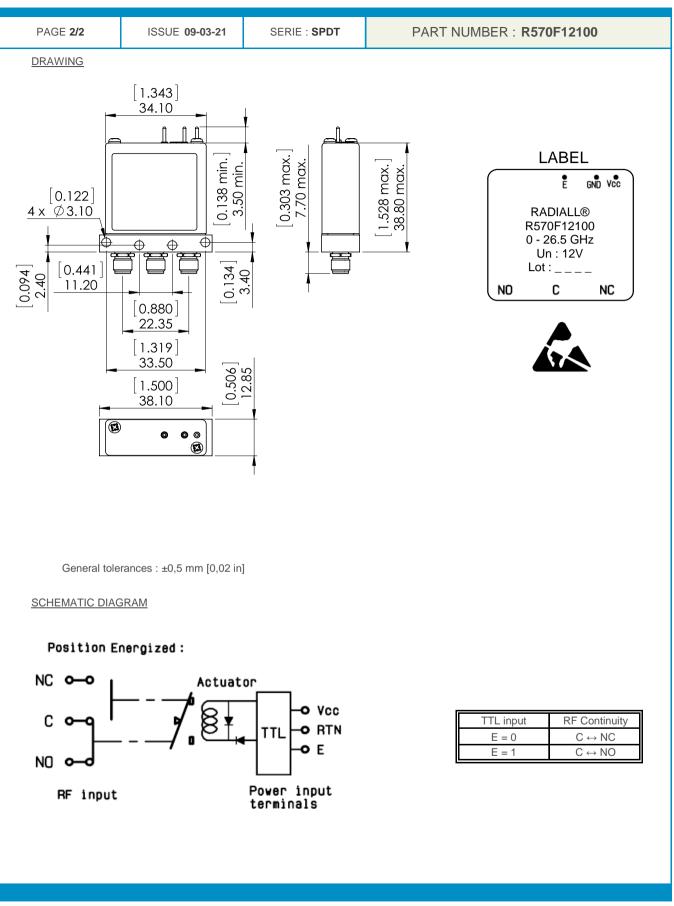

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Coaxial Switches category:

Click to view products by Radiall manufacturer:

Other Similar products are found below :

 CR-53S10
 R599311000
 R599906000
 R599910000
 CCT-38S150-T
 CR-58S160
 MS180LH3-HRMJ-040V300A
 R599312000
 R512F73417

 R514F73417
 R595333210
 R595F53225
 R591363400
 R595433410
 R595333215
 R595337220
 R595343115
 R595343125
 R591362440

 R593373148
 R595343215
 CCR-33K40
 R595357325
 CCS-18N480-TDS
 R591702640
 R591703620
 CR-33K10
 R599313000

 R516431100
 R591722605
 ARD15105
 MS156LH1-HRMJ-088V300A
 R570412000
 R570413000
 R570422100
 R570423000

 R570432000
 R570433000
 R570442000
 R570412030
 R570432010
 R570433100
 R570443030
 R570442010

 R570413030
 R570452000
 R570442000
 R570412030
 R570432010
 R570433100
 R570443030
 R570442010