




AEC-Q200

This component was always RoHS compliant from the first date of manufacture.

RO3073A

**315.0 MHz
SAW
Resonator**



SM5035-4

- **Designed for 315.0 MHz Transmitters**
- **Very Low Series Resistance**
- **Quartz Stability**
- **Surface-mount Ceramic Case**
- **Complies with Directive 2002/95/EC (RoHS)**
- **Tape and Reel Standard per ANSI/EIA-481**



The RO3073A is a one-port surface-acoustic-wave (SAW) resonator packaged in a surface-mount ceramic case. It provides reliable, fundamental-mode quartz frequency stabilization of fixed-frequency transmitters operating at 315.0 MHz. This SAW is designed specifically for remote control and wireless security transmitters.

Absolute Maximum Ratings

Rating	Value	Units
CW RF Power Dissipation (See: Typical Test Circuit)	+0	dBm
DC Voltage Between Terminals (Observe ESD Precautions)	±30	VDC
Case Temperature	-40 to +85	°C
Soldering Temperature (10 seconds / 5 cycles maximum)	260	°C

Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency, +25 °C	Absolute Frequency	f_C	314.925		315.075	MHz
	Tolerance from 315.0 MHz	Δf_C			±75	kHz
Insertion Loss	IL			1.5	2.2	dB
Quality Factor	Unloaded Q	Q_U		8000		
	50 Ω Loaded Q	Q_L		1300		
Temperature Stability	Turnover Temperature	T_O	10	25	40	°C
	Turnover Frequency	f_O		f_C		
	Frequency Temperature Coefficient	FTC		0.032		ppm/°C ²
Frequency Aging	Absolute Value during the First Year	$ f_A $		≤10		ppm/yr
DC Insulation Resistance between Any Two Terminals			1.0			M Ω
RF Equivalent RLC Model	Motional Resistance	R_M		19.4		Ω
	Motional Inductance	L_M		78.4		μ H
	Motional Capacitance	C_M		3.3		fF
	Shunt Static Capacitance	C_O		4.1		pF
Test Fixture Shunt Inductance	L_{TEST}			64.2		nH
Lid Symbolization (in addition to Lot and/or Date Codes)			656, <u>YYWWS</u>			



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

NOTES:

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.


Electrical Connections

The SAW resonator is bidirectional and may be installed with either orientation. The two terminals are interchangeable and unnumbered. The callout NC indicates no internal connection. The NC pads assist with mechanical positioning and stability. External grounding of the NC pads is recommended to help reduce parasitic capacitance in the circuit.




Typical Test Circuit

The test circuit inductor, L_{TEST} , is tuned to resonate with the static capacitance, C_0 , at F_C .

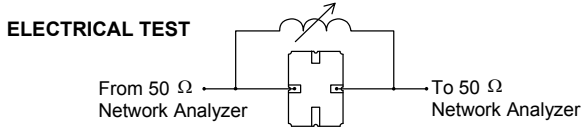


POWER TEST

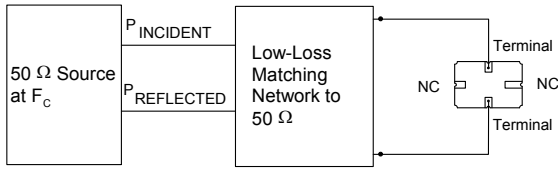


$$CW \text{ RF Power Dissipation} = P_{INCIDENT} - P_{REFLECTED}$$

Typical Application Circuits


Typical Low-Power Transmitter Application

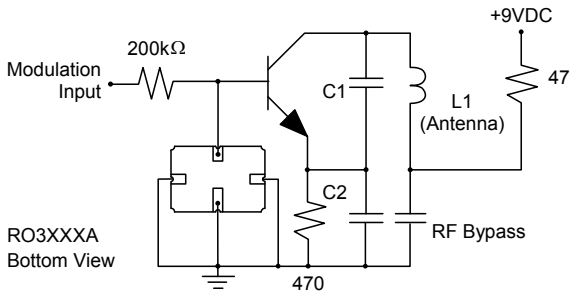

Typical Local Oscillator Applications

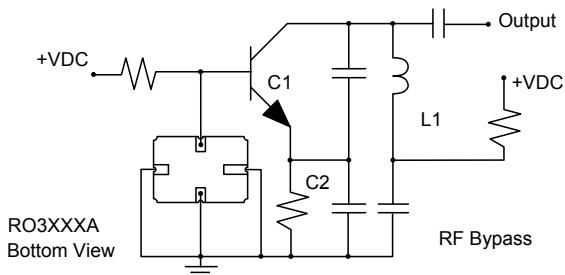


Equivalent RLC Model

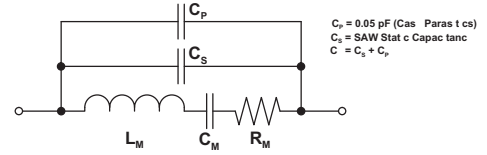



$C_P = 0.05 \text{ pF (Cas Parasit cs)}$
 $C_S = \text{SAW Stat c Capacitanc}$
 $C = C_S + C_P$

Temperature Characteristics

The curve shown on the right accounts for resonator contribution only and does not include LC component temperature contributions.

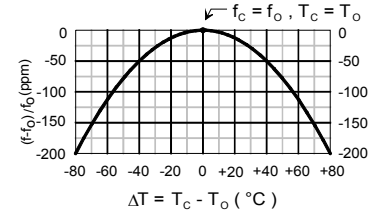

Case

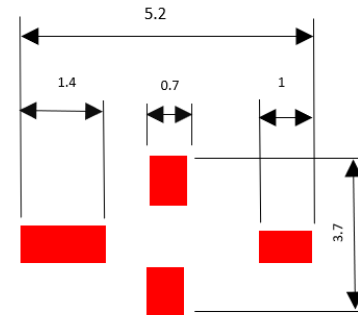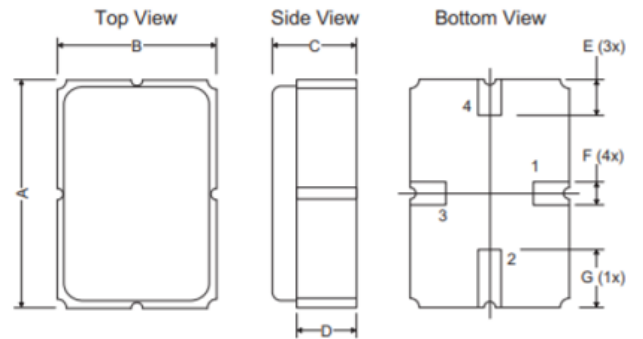


PCB Footprint

Dimensions	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A	4.87	5.00	5.13	0.191	0.196	0.201
B	3.37	3.50	3.63	0.132	0.137	0.142
C	1.45	1.53	1.60	0.057	0.060	0.062
D	1.35	1.43	1.50	0.040	0.057	0.059
E	0.67	0.80	0.93	0.026	0.031	0.036
F	0.37	0.50	0.63	0.014	0.019	0.024
G	1.07	1.20	1.33	0.042	0.047	0.052

Recommended Reflow Profile

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (10 seconds).
4. Time: 5 times maximum.

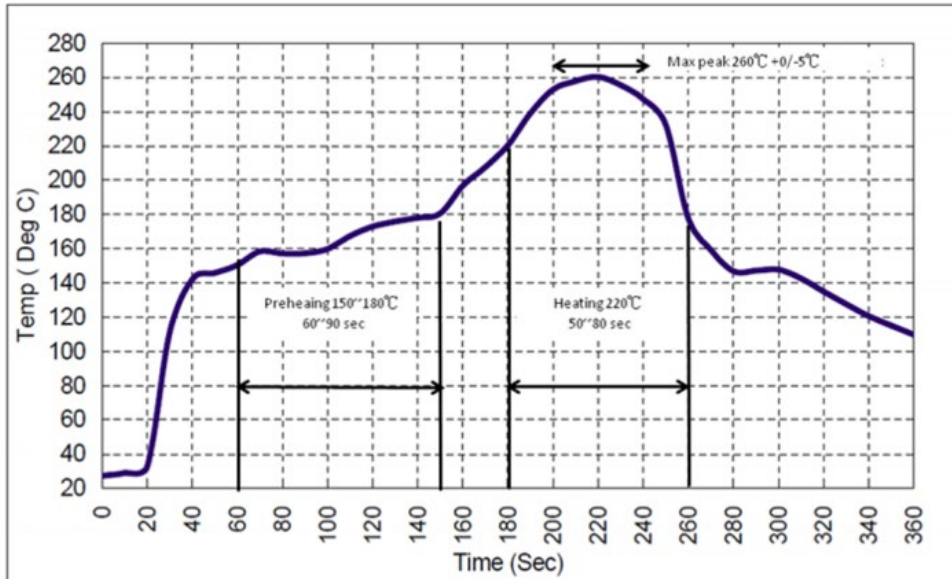

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resonators](#) category:

Click to view products by [RFMi](#) manufacturer:

Other Similar products are found below :

[146-32.768-12.5-20-20/A](#) [1C209830BC0C](#) [1C210000BB0C](#) [2520-16.00-9-10-10/A](#) [2520-26.00-12-10-10/A](#) [2520-26.00-9-10-10/A](#) [3225-16.00-10-10-10/A](#) [3225-16.00-12-10-10/A](#) [3225-19.2-12-10-10/A](#) [3225-24.00-10-10-10/A](#) [3225-24.00-12-10-10/A](#) [3225-24.00-20-10-10/A](#) [3225-25.00-10-10-10/A](#) [3225-25.00-12-10-10/A](#) [3225-25.00-20-10-10/A](#) [3225-26.00-12-10-10/A](#) [3225-27.00-20-10-10/A](#) [3225-32.00-12-10-10/A](#) [3225-8.00-10-10-10/A](#) [3225-8.00-20-10-10/A](#) [3225-8.00-8-10-10/A](#) [416626X](#) [416627H](#) [436236G](#) [49MD-13.52127-7-10-10/B](#) [49MD-3.2768-20-10-10/B](#) [49MD-38.000-20-10-10/B](#) [49MD-4.433618-30-10-10/B](#) [49MD-4.825-9-10-10/B](#) [49MD-4.9152-20-10-10/B](#) [49MD-6.000-27-10-10/B](#) [49MD-6.063-12-10-10/B](#) [49MD-8.192-20-10-10/B](#) [49S-12.288-20-10-10/B](#) [49S-13.52127-10-10-10/B](#) [49S-13.52127-7-10-10/B](#) [49S-24.576-20-10-10/B](#) [49S-4.000-8-10-10/B](#) [49S-4.433618-30-10-10/B](#) [49S-4.9152-20-10-10/B](#) [49S-4.9152-30-10-10/B](#) [49S-7.680-18-10-10/B](#) [49S-8.00-20-10-20/A](#) [49S-8.192-20-10-10/B](#) [49S-9.81563-10-10-10/B](#) [49S-9.81563-20-10-10/B](#) [49SAT13560161050JY](#) [49SAT26000201040JY](#) [49SS-13.56-20-10-10/B](#) [49SS-16.00-20-10-10/B](#)