

REV	DESCRIPTION	ENGR DATE
D	SEE ECN #1284 FOR CHANGES	SK 02.08.07
C	SEE ECN #1283 FOR CHANGES	SK 02.05.07
B	SEE ECN #529 FOR CHANGES	SM 11.20.02
A	SEE ECN #517 FOR CHANGES	SM 11.12.02

TOLERANCES
UNLESS NOTED
.XX=±.010
.XXX=±.005
FRAC=±1/64
ANG=±1°



FILE # MCG-XN
RE: RICHCO, INC.

DWN: E.P.
APP:
DT: 11-9-98
RICHCO INC.
PO BOX 804238, CHICAGO, 60680
(773) 539-4060

PART #
SEE TABLE
PRINT TYPE CA

TITLE: METAL CONTINUOUS GROMMET
DWG IN (MM) FINAL
DR

- NOTES:
1. MATERIAL: 304 STAINLESS STEEL (RMS-283).
 2. COATING: NYLON 11 (RMS-192), COLOR: BLACK.
 - TABER ABRASION RESISTANCE: PER NFT 30-015,
 - 5 TO 8 mg LOSS AFTER 100 CYCLES.
 4. DIELECTRIC STRENGTH: 1000 VOLTS @ 60 HZ.
 5. OPERATING TEMPERATURE RANGE: -40°F TO 285°F (-40°C TO 140°C).
 6. SALT SPRAY TESTING: 2000 HOURS, ASTM B117. MIL-STD-202, METHOD 301.
 7. FLAMMABILITY: UL 94 V-0 YELLOW CARD NO. E113553 NZMT2.
 8. RANDOM SHOCK AND VIBRATION: MIL-STD-1344, METHOD 2005.1, TEST CONDITION VI, LETTER "J". DURATION 8 HOURS LONGITUDINAL AND 8 HOURS PERPENDICULAR. rms G 41.7.
 9. HAND HELD CUTTING TOOL NEEDED, ORDER P/N : MCGS-1
 10. FITS ANY TWO AXIS CONTOUR.
 11. COLOR CODE STRIPE: PRINTING INK (RMS-346).
 12. PACKAGING: 100 FT (30.5m) REEL.
- 25 FT (7.6m) WITH SHEARS, AVAILABLE BY SPECIAL ORDER ONLY.
TO ORDER, ADD SUFFIX "-PK" TO PART NO.

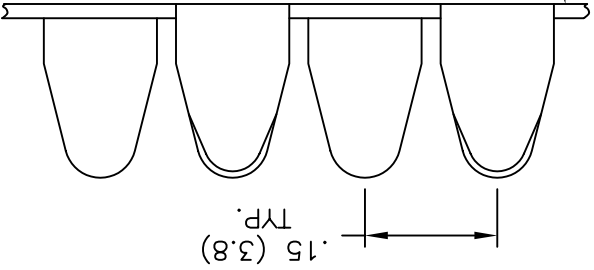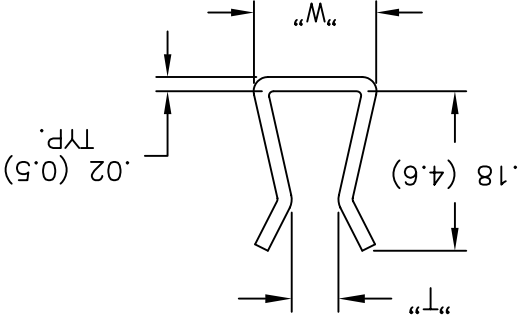

PART NO.	DIM "W"	"T" APPLICATION THICKNESS
MCG-1N	.14 (3.6)	.029-.045 (0.7-1.1)
MCG-2N	.14 (3.6)	.044-.056 (1.1-1.4)
MCG-3N		.055-.069 (1.4-1.7)
MCG-4N	.18 (4.6)	.069-.090 (1.7-2.3)
MCG-6N		.113-.130 (2.9-3.3)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Grommets & Bushings](#) category:

Click to view products by [Richco](#) manufacturer:

Other Similar products are found below :

[M10-036565-101](#) [M10-036565-143](#) [M10-036565-183](#) [M10-036565-244](#) [M10-036565-122](#) [M10-036565-163](#) [M10-036565-232](#) [HSS-M32-TPE-V0](#) [NSYTS AKFL](#) [SP-16 TPE](#) [SP-20 TPE](#) [SK 8-13 TPE](#) [4014B](#) [2407](#) [ALBCBS36025](#) [2141-P](#) [HTL-40-10-TPE](#) [2417-P](#) [2917-P](#) [3108-P](#) [2871-P](#) [1342664](#) [100187](#) [100188](#) [100216](#) [100223](#) [100236](#) [52001970](#) [52001980](#) [52002010](#) [52002020](#) [52002050](#) [VG-1](#) [FEM 27-35](#) [100175](#) [100176](#) [100178](#) [100182](#) [100196](#) [100238](#) [100244](#) [100744](#) [100084](#) [100174](#) [100177](#) [100179](#) [100180](#) [100181](#) [100186](#) [100721](#)