


RUGGED RELIABLE MICRO SOCKETS

(1.00 mm) .0394" PITCH • CLM/MLE SERIES

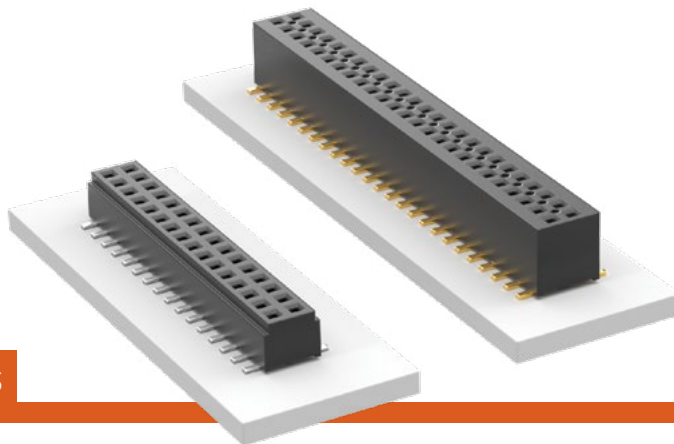

CLM

Mates:

FTM, FTMH, MW

MLE

Mates:

FTM, FTMH, MW

SPECIFICATIONS

Insulator Material: Black LCP

Contact Material:

CLM: Phosphor Bronze

MLE: BeCu

Plating:

CLM: Au or Sn over

50 μ " (1.27 μ m) Ni

MLE: Au over 10 μ " (0.25 μ m) Ni

Current Rating (CLM/FTM):

2.8 A per pin

(2 pins powered)

Current Rating (MLE/FTM):

2.9 A per pin (2 pins powered)

Operating Temp Range:

-55 °C to +125 °C

Max Cycles:

CLM: 100 with 10 μ " (0.25 μ m) Au

Voltage Rating:

MLE: 310 VAC

Insertion Depth:

CLM:

Top Entry = (1.40 mm) .055" min.,

Bottom Entry =

(2.41 mm) .095" min.

(Add board thickness for

correct post OAL)

MLE:

(1.63 mm) .064" to

(3.18 mm) .125" with

(0.38 mm) .015" wiper,




pass-through, or (2.44 mm) .096"

minimum for bottom entry

Normal Force:

CLM: 40 grams (0.39 N) average

**TIGER
CLAW
CONTACT**

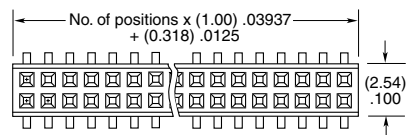

-PA

-P

MLE

- 1

**NO. PINS
PER ROW**

- 01

**PLATING
OPTION**

- DV

OPTIONS

02 thru 50

-G

= 10 μ "
(0.25 μ m)
Gold

-A

= Alignment Pin
(3 positions minimum)
Metal or plastic
at Samtec discretion

-K

= (4.00 mm) .1575" DIA
Polyimide film
Pick & Place Pad
(5 positions minimum)

-P

= Metal Pick & Place Pad
(5 positions minimum)



-TR

= Tape & Reel

-FR

= Full Reel Tape & Reel
(must order maximum
quantity per reel;
contact Samtec for
quantity breaks)

**TIGER
BEAM
CONTACT**

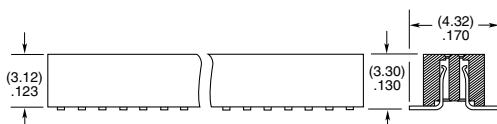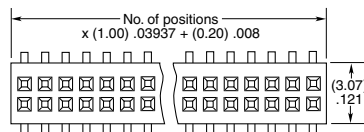

-P

-A

PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0.10 mm) .004" max (02-25)

(0.15 mm) .006" max (26-50)*

*(.004" stencil solution

may be available; contact

ipg@samtec.com)

ALSO AVAILABLE

MOQ Required

Alignment pin

Other Gold plating options



Note:

Some lengths, styles and
options are non-standard,
non-returnable.

samtec.com?CLM or samtec.com?MLE

F-221 (Rev 29MAR21)

Unless otherwise approved in writing by Samtec, all parts and components are designed and built according to Samtec's specifications which are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) *category:*

Click to view products by [Samtec](#) *manufacturer:*

Other Similar products are found below :

[589158040000018](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [589159005003045](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [589159005002045](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#)