



ICA-320-SGT



ICA-624-ZEGG

(2,54mm) .100"

ICA SERIES

# AUTOMATED INSERTION DIP SOCKETS

Mates with:  
APA

ICA

ROW SPACING &  
NO. OF CONTACTS


STYLE  
OPTION

PLATING  
OPTION

OPTION  
(Leave Blank for  
Standard Version)

Specify from chart below

- Side & end stackable
- Great for auto insertion
- Open body design

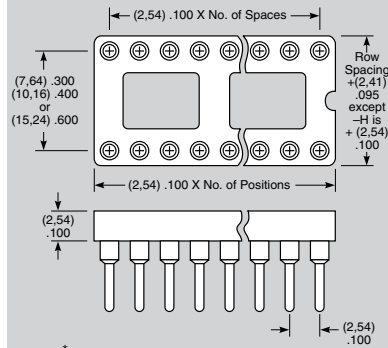

	Row Space	No. of Contacts
-308	.300 (7,62)	08
-314		14
-316		16
-318		18
-320		20
-322*		22
-324	.400 (10,16)	24
-328		28
-422	.600 (15,24)	22
-624		24
-628		28
-632		32
-640		40
-648		48

**GG**

= 30µ" (0,76µm)  
Gold contact,  
10µ" (0,25µm)  
Gold Shell

**GT**

= 30µ" (0,76µm)  
Gold contact,  
Tin Shell

**ST**

= 10µ" (0,25µm)  
Gold contact,  
Tin shell (Styles -S  
& -ZS only)

**-2**  
=.360 (9,14)  
Tail


**Wire-Wrap  
Option**

Requires Style  
-W or -ZW  
Specify desired  
suffix for shorter  
Wire-Wrap tail.

**-3**  
=.260 (6,60)  
Tail

**-L**  
= Locking  
Socket

Requires Style  
-S or -ZS



Requires GT  
Plating Option

## SPECIFICATIONS

For complete specifications  
see [www.samtec.com?ICA](http://www.samtec.com?ICA)

**Insulator Material:**  
Black Glass Filled  
Polyester  
except -328 is LCP  
**Contact:** BeCu  
**Shell:** Brass



**Plating:**

Au or Sn over 50µ" Ni  
**Flammability Rating:**  
UL 94V-O

**Insulation Resistance:**  
5000 MΩ min

**Temperature Range:**  
-55°C to +105°C with Tin  
-55°C to +125°C with Gold.

**Withstanding Voltage:**  
1000 VRMS

**Current Rating:** 1A  
**Contact Resistance:**  
10mΩ max

**Lead Size Range:**  
.015" (0,38mm) to .022"  
(0,56mm) DIA and most IC leads

**Insertion Force:**  
(Single contact only)  
Standard = 9 oz avg, 16 oz max;  
Low Insertion Force =  
2.5 oz avg, 5.5 oz max


**Withdrawal Force:**  
(Single contact only)  
Standard = 2.5 oz avg, 1.5 oz  
min; Low Insertion Force =  
2.0 oz avg, 0.35 oz min

**Lead-Free Solderable:**  
Wave only  
**RoHS Compliant:** Yes

**Note:** Some sizes, styles and  
options are non-standard,  
non-returnable.


**-S, -ZS, -ZA**

= Printed Circuit  
-ZS & -ZA = Low Insertion Force



LEAD STYLE	X DIA	Y TAIL	Z
-S or -ZS	(0,51) .020	(3,18) .125	(7,62) .300
-ZA	(0,51) .020	(4,57) .180	(8,89) .350


Locking lead  
available with -S  
and -ZS.  
See OPTION.



Insertion Depth = .095" (2,41) to .145" (3,68):  
Style S Component Part No. = SC-1P1  
Style ZS Component Part No. = EZ-1P1  
Style ZA Component Part No. = EZ-6P1  
Option L Component Part No. = SC-1L1 or EZ-1L1

**-W, -ZW**

= Wire-Wrap  
ZW = Low Insertion Force




Shorter wire-wrap tail  
lengths available.  
See OPTION.

Insertion Depth = .125" (3,18) to .157" (3,99)  
Style W Component Part No. = SC-1W1(1)  
Style ZW Component Part No. = EZ-1W1(1)  
Style W-2 Component Part No. = SC-1W1(2)  
Style ZW-2 Component Part No. = EZ-1W1(2)  
Style W-3 Component Part No. = SC-1W1(3)  
Style ZW-3 Component Part No. = EZ-1W1(3)

**-ZE**

= Elevated  
Low Insertion Force



Insertion Depth = .125" (3,18) to .170" (4,32)  
Style ZE Component Part No. = EZ-2P3

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [IC & Component Sockets](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[714-43-102-31-012000](#) [0066-3-17-15-30-14-02-0](#) [0134-0-15-15-32-27-04-0](#) [614-DG5](#) [6527-0-00-15-00-00-03-0](#) [670](#) [672](#) [673](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-003101](#) [807-22-001-10-004101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [835-43-014-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [852-10-026-10-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-306-41-003000](#) [116-43-308-41-007000](#) [116-87-308-41-007101](#) [PX-68LCC](#) [PX-84LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [123-43-636-41-001000](#) [123-87-320-41-001101](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [123-43-322-41-801000](#) [123-43-428-41-001000](#) [123-43-624-41-001000](#) [12-3513-11](#)