


SMT & THROUGH-HOLE BOARD STACKERS

(2.00 mm) .0787" PITCH • TW SERIES

CLT or MMS	SQT
8	4
G b p s	G b p s

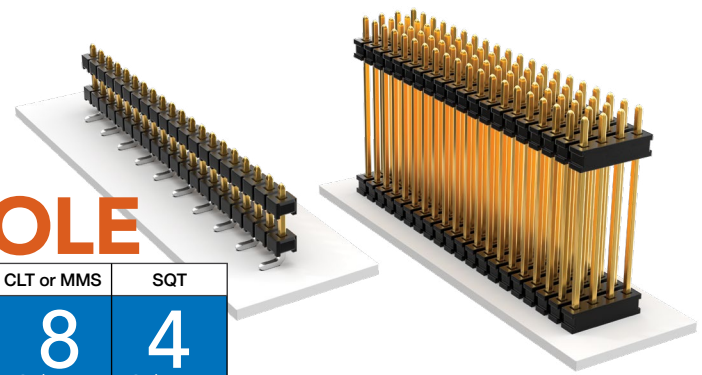

TW

Board Mates:

CLT, SQT, SQW, ESQT, TLE, SMM, MMS

Cable Mates:

TCSD

SPECIFICATIONS

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Sn or Au over 50 μ" (1.27 μm) Ni

Current Rating:

TW-SM = 4.9 A per pin (2 pins powered)

TW-TH = 5.2 A per pin (2 pins powered)

Operating Temp Range:

-55 °C to +105 °C with Tin;

-55 °C to +125 °C with Gold

PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0.15 mm) .006" max*

*(.004" stencil solution may be available; contact IPG@samtec.com)

TW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	SM	OTHER OPTION																				
	02 thru 36	Specify LEAD STYLE from chart	-F = Gold flash on post, Matte Tin on tail -L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail -T = Matte Tin	-S = Single Row -D = Double Row	- "XXX" = Stacker Height in inches (0.13 mm) .005" increments Example: -250 = (6.35 mm) .250"		- "XXX" = Polarized Position -A = Alignment Pin (Metal or plastic at Samtec discretion) (4.83 mm) .190" min. board space (-D only) -P = Pick & Place Pad (1.91 mm) .075" min. post height (04-36 only) - "X"R = Specify "T" for Tape & Reel Specify "F" for Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks) (-07 lead style N/A) (-06 lead style with -P option N/A as standard)																				
				<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>OAL</th> </tr> </thead> <tbody> <tr><td>-02</td><td>(7.85) .309</td></tr> <tr><td>-03</td><td>(11.86) .467</td></tr> <tr><td>-04</td><td>(12.37) .487</td></tr> <tr><td>-06</td><td>(15.37) .605</td></tr> <tr><td>-07</td><td>(17.35) .683</td></tr> <tr><td>-09</td><td>(9.86) .388</td></tr> </tbody> </table>		LEAD STYLE	OAL	-02	(7.85) .309	-03	(11.86) .467	-04	(12.37) .487	-06	(15.37) .605	-07	(17.35) .683	-09	(9.86) .388	<table border="1"> <thead> <tr> <th>ROW OPTION</th> <th>A</th> </tr> </thead> <tbody> <tr><td>-S</td><td>(5.08) .200</td></tr> <tr><td>-D</td><td>(6.35) .250</td></tr> </tbody> </table>		ROW OPTION	A	-S	(5.08) .200	-D	(6.35) .250
LEAD STYLE	OAL																										
-02	(7.85) .309																										
-03	(11.86) .467																										
-04	(12.37) .487																										
-06	(15.37) .605																										
-07	(17.35) .683																										
-09	(9.86) .388																										
ROW OPTION	A																										
-S	(5.08) .200																										
-D	(6.35) .250																										

ALSO AVAILABLE

MOQ Required

Other Platings

End shrouds with or without guide post

TW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	TAIL SPEC																										
	02 thru 50	Specify LEAD STYLE from chart	-F = Gold flash on post, Matte Tin on tail -L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail -T = Matte Tin	-S = Single Row -D = Double Row -T = Triple Row -Q = Four Row -5 = Five Row -6 = Six Row	- "XXX" = Stacker Height in inches (0.13 mm) .005" increments Example: -250 = (6.35 mm) .250"	- "XXX" = Tail Length in inches (0.13 mm) .005" increments Example: -150 = (3.81 mm) .150" - "XXX" = Polarized Position (Specify position to be removed)																										
						<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>OAL</th> </tr> </thead> <tbody> <tr><td>-01</td><td>(8.20) .323</td></tr> <tr><td>-02</td><td>(9.60) .377</td></tr> <tr><td>-03</td><td>(13.60) .535</td></tr> <tr><td>-04</td><td>(14.10) .555</td></tr> <tr><td>-05</td><td>(15.10) .594</td></tr> <tr><td>-06</td><td>(17.10) .673</td></tr> <tr><td>-07</td><td>(19.10) .751</td></tr> <tr><td>-08*</td><td>(21.10) .830</td></tr> <tr><td>-09</td><td>(11.60) .456</td></tr> <tr><td>-10</td><td>(15.60) .614</td></tr> <tr><td>-11</td><td>(10.08) .397</td></tr> <tr><td>-12*</td><td>(28.19) 1.110</td></tr> </tbody> </table>	LEAD STYLE	OAL	-01	(8.20) .323	-02	(9.60) .377	-03	(13.60) .535	-04	(14.10) .555	-05	(15.10) .594	-06	(17.10) .673	-07	(19.10) .751	-08*	(21.10) .830	-09	(11.60) .456	-10	(15.60) .614	-11	(10.08) .397	-12*	(28.19) 1.110
LEAD STYLE	OAL																															
-01	(8.20) .323																															
-02	(9.60) .377																															
-03	(13.60) .535																															
-04	(14.10) .555																															
-05	(15.10) .594																															
-06	(17.10) .673																															
-07	(19.10) .751																															
-08*	(21.10) .830																															
-09	(11.60) .456																															
-10	(15.60) .614																															
-11	(10.08) .397																															
-12*	(28.19) 1.110																															
				<table border="1"> <thead> <tr> <th>ROW OPTION</th> <th>STACKER HEIGHT</th> </tr> </thead> <tbody> <tr><td>-S, -D*, -Q</td><td>(3.05) .120 MIN</td></tr> <tr><td>-T, -5, -6</td><td>(4.06) .160 MIN</td></tr> </tbody> </table>		ROW OPTION	STACKER HEIGHT	-S, -D*, -Q	(3.05) .120 MIN	-T, -5, -6	(4.06) .160 MIN																					
ROW OPTION	STACKER HEIGHT																															
-S, -D*, -Q	(3.05) .120 MIN																															
-T, -5, -6	(4.06) .160 MIN																															
				<p>*-D with stacker height greater than (4.06 mm) .160" will not have standoffs.</p>		<p>*Style -08 & -12 = S & D only</p>																										

Notes:

For added mechanical stability, Samtec recommends mechanical board spacers be used in applications with gold or selective gold plated connectors. Contact ipg@samtec.com for more information.

This Series is non-standard, non-returnable.

samtec.com?TW-SM or samtec.com?TW-TH

F-221 (Rev 19MAR21)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68682-310LF](#) [68684-306](#) [75140-7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#)