


XCSTE5511

plastic safety switch XCSTE - 1NC + 1NO -
slow break - 1 entry tapped Pg 11-24 V



Product availability: Non-Stock - Not normally stocked in distribution facility

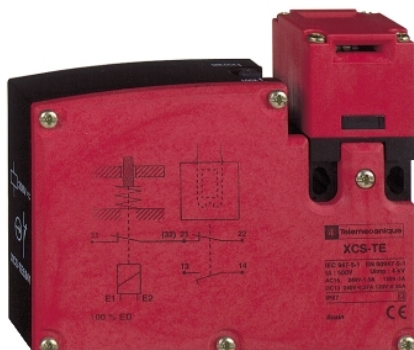

Main

| | |
|--|---|
| Range of product | Preventa Safety detection |
| Product or component type | Safety switch |
| Component name | XCSTE |
| Design | Rectangular |
| Material | Plastic |
| Head type | Key operated turret head |
| Contacts type and composition | 1 NC + 1 NO |
| Contact operation | Slow-break, break before make |
| Solenoid contacts type and composition | 1 NC (slow-break) |
| Cable entry | 1 entry tapped Pg 11 |
| Electromagnet interlocking | Locking on energisation and unlocking on de-energisation of solenoid |
| [Us] solenoid rated supply voltage | 24 V (- 20...10 %) |
| Cable outer diameter | 0.28...0.39 in (7...10 mm) |
| Electrical connection | Terminal, 1 x 0.5...2 x 1.5 mm ² with or without cable end |
| Number of poles | 2 |
| Locking options description | With interlocking, locking by solenoid |

Complementary

| | |
|--|--|
| Insulation | Double insulated |
| Positive opening | With NC contact |
| Supply voltage type | AC/DC |
| Supply frequency | 50/60 Hz |
| Load factor | 1 |
| Power consumption in VA | 10 VA |
| Mechanical durability | 1000000 cycles |
| Positive opening minimum force | 15 N |
| Minimum actuation speed | 0.03 ft/s (0.01 m/s) |
| Maximum actuation speed | 1.64 ft/s (0.5 m/s) |
| [Ie] rated operational current | 0.55 A at 125 V utilisation category DC-13, Q300 conforming to EN/IEC 60947-5-1 0.27 A at 250 V utilisation category DC-13, Q300 conforming to EN/IEC 60947-5-1 3 A at 120 V utilisation category AC-15, B300 conforming to EN/IEC 60947-5-1 1.5 A at 240 V utilisation category AC-15, B300 conforming to EN/IEC 60947-5-1 |
| [Ithe] conventional enclosed thermal current | 6 A |
| [Ui] rated insulation voltage | 300 V conforming to CSA C22.2 No 14 500 V conforming to EN/IEC 60947-1 300 V conforming to UL 508 |
| [Uimp] rated impulse withstand voltage | 6 kV conforming to EN/IEC 60947-5-1 |
| Short-circuit protection | 10 A cartridge fuse type gG (gl) |
| Actuator forcible withdrawal rtc | 500 N |
| Operating rate | 10 cyc/mn for maximum durability |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|-------------------------|---|
| Safety level | Can reach category 4 with the appropriate monitoring system and correctly wired conforming to EN/ISO 13849-1 Can reach PL = e with the appropriate monitoring system and correctly wired conforming to EN/ISO 13849-1 Can reach SIL 3 with the appropriate monitoring system and correctly wired conforming to EN/IEC 61508 |
| Safety reliability data | B10d = 5000000 (value given for a life time of 20 years limited by mechanical or contact wear) |
| Body material | PA (polyamide) |
| Head material | PA (polyamide) |
| Depth | 1.3 in (33 mm) |
| Height | 3.7 in (94 mm) |
| Width | 4.33 in (110 mm) |
| Product weight | 0.79 lb(US) (0.36 kg) |

Environment

| | |
|---------------------------------------|--|
| Standards | EN/IEC 60204-1 CSA C22.2 No 14 EN/ISO 12100 UL 508 EN 1088/ISO 14119 EN/IEC 60947-5-1 |
| Product certifications | CSA UL |
| Protective treatment | TC |
| Ambient air temperature for operation | -13...140 °F (-25...60 °C) |
| Ambient air temperature for storage | -40...158 °F (-40...70 °C) |
| Vibration resistance | 5 gn (f = 10...500 Hz) conforming to IEC 60068-2-6 |
| Shock resistance | 10 gn 11 ms conforming to IEC 60068-2-27 |
| Electrical shock protection class | Class II conforming to EN/IEC 61140 |
| IP degree of protection | IP67 conforming to EN/IEC 60529 and EN/IEC 60947-5-1 |

Ordering and shipping details

| | |
|-----------------------|---------------------------------|
| Category | 22411 - LIMIT SWITCHES,IEC,XCKJ |
| Discount Schedule | T |
| GTIN | 003389110825411 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 0.7000000000000007 |
| Returnability | N |
| Country of origin | FR |

Offer Sustainability

| | |
|---------------------------|--|
| Sustainable offer status | Green Premium product |
| RoHS (date code: YYWW) | Compliant - since 1014 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity |
| REACH | Reference not containing SVHC above the threshold |
| California proposition 65 | WARNING: This product can expose you to chemicals including: |
| ----- Substance 1 | Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and |
| ----- Substance 2 | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| ----- More information | For more information go to www.p65warnings.ca.gov |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Keylock Switches](#) category:

Click to view products by [Schneider](#) manufacturer:

Other Similar products are found below :

[89496-09](#) [58J1007](#) [58J8A45-01B05N](#) [719-0201-000](#) [719-0202-000](#) [719-0702-000](#) [719-5504-000](#) [84800-04](#) [GKNC33L](#) [GKNC3L](#)
[PVA2OAH5](#) [HA1K-2C2VA-2](#) [14-136.025K](#) [14-235.022K](#) [AS6H-2K2A](#) [AS6M-2K1B](#) [AS6Q-2K2A](#) [AS6Q-3K2A](#) [1571487-1](#) [KEY-AS6](#)
[KH3C-20C](#) [8928K493](#) [2SWK131AL102](#) [AS6M-2K1A](#) [AS6Q-2K1PB](#) [51-401.036D](#) [51-414.036D](#) [HW1K-31BF20](#) [HW1K-3HF20](#) [Y1112-](#)
[2027CLFT](#) [51-155.025D](#) [51-195.025D](#) [51-404.036D](#) [51-405.036D](#) [1-1437597-8](#) [58J8A36-01B04N](#) [58M1422](#) [86945-05](#) [719-0204-000](#) [719-](#)
[0205-000](#) [719-0801-000](#) [719-0804-000](#) [719-0805-000](#) [88422-18](#) [58J8A90-01B02N](#) [58J8A90-01C02N](#) [58J9P36-01B09N](#) [58J8A36-01C03N](#)
[GKRA3K1A2-F03-C](#) [GKBB14L6](#)