#### IEC Connector protection degree IP67 / IP69K, Rewireable, Straight







4762 IEC Outlet black

4762 without Cover white

Set consisting of appliance inlet and connector



120° C

### **Description**

- Cord Connectors (Rewireable): Screw
- Connector , Pin temperature 120 °C , Protection class I
- Push-Pull locking system
- Wire size 0.75-1.5mm², 18AWG-14AWG (0.82-2.08mm²)
- Cable diameter 6.0-10.0mm
- Protection cover as accessory for IP67 / IP69K unplugged
- Complete set consisting of appliance inlet and outlet
- Mating appliance inlet: 4761

### **Unique Selling Proposition**

- Waterproofed Cord Connector IP67 / IP69K
- Perfect for use in harsh environments
- Push/Pull technology with interlocking system
- Very simple cable assembly

### See below:

#### **Approvals and Compliances**

#### Weblinks

pdf data sheet, html datasheet, General Product Information, Approvals, Distributor-Stock-Check, Accessories, Detailed request for product, Microsite

### **Technical Data**

Ratings IEC	10 A / 250 VAC; 50 Hz
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric Strength	> 1.5 kVAC between L-N > 1.5 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temperature	-25°C to 120°C
IP-Protection	front side IP67 acc. to IEC 60529 / IP69K acc. to ISO 20653
Protection against electric shock	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Cable
Material: Housing	

Appliance inlet/-outlet	S15 acc. to IEC 60320-1 UL 60320-1, CSA C22.2 no. 60320-1 (For hot conditions) pin-temperature 120 °C, 10A, Protection Class I
	Shape of connector S15 is SCHURTER specific

#### **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

#### **Approvals**

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: 4762

Approval Logo	Certificates	Certification Body	Description
10	VDE Approvals	VDE	Certificate Number: 40044382
c <b>511</b> ° us	UL Approvals	UL	UL File Number: E96454

### **Product standards**

Product standards that are referenced

Organization	Design	Standard	Description
<u>IEC</u>	Designed according to	IEC 60320-1	Appliance couplers for household and similar general purposes
<u>IEC</u>	Designed according to	IEC 60320-1	Appliance couplers for household and similar general purposes
(UL)	Designed according to	UL 60320-1	Standard for Attachment Plugs and Receptacles
GF Group	Designed according to	CSA C22.2 no. 60320-1	General Use Receptacles, Attachment Plugs, and Similar Wiring Devices

### **Application standards**

Application standards where the product can be used


Organization	Design	Standard	Description
<u>IEC</u>	Designed for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements


### Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
ROHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
50	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
Halogen Free 📭	Halogen Free	SCHURTER AG	SCHURTER strives to offer our customers halogen free products.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

### Dimensions [mm]



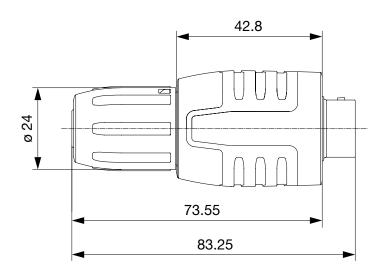

### **All Variants**

Appliance Inlet	Connector	Kit	Color	Terminals Inlet	Order Number
	•	-	black	-	4312.0003
•	•	1)	black	Quick connect terminals 4.8 x 0.8 mm	4312.0004
•	•	1)	black	Quick connect terminals 6.3 x 0.8 mm	4312.0005
•	•	1)	black	Solder terminals	4312.0006
	•	-	white	-	4312.0010
•	•	1)	white	Quick connect terminals 4.8 x 0.8 mm	4312.0011
•	•	1)	white	Quick connect terminals 6.3 x 0.8 mm	4312.0012
•	•	1)	white	Solder terminals	4312.0013

<sup>1)</sup> complete set consisting of appliance inlet and outlet

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging unit

10 Pcs

#### **Accessories**

Description



Protection cover

Protection cover for waterproof appliance coupler 4761 / 4762

## Mating Inlets/Plugs shuttered

Category / Description



Appliance Inlet Overview complete

4761, Mounting: Screw, Solder / Quick Connect, Appliance Inlet: S16

4761

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for AC Power Entry Modules category:

Click to view products by Schurter manufacturer:

Other Similar products are found below:

0098.0050 6167.0002 6609100-2 7-6609955-2 FKI2-50-6/M5 FN361-6-06 FN389-4-22 FN9226B-6-02 FN9233S1-10-06 FN9233S1-8-06 FN9233S1B-8-06 FN9233S1R-1-06 FN9233S1R-12-06 FN9233SB-1-06 FN9233SB-12-06 FN9233SB-8-06 FN9233SR-10-06 FN9244B-15-06HI FN9244EB-3-06 FN9244EB-8-06 FN9244ER-15-06 FN9244ER-8-06 FN9244ES1-8-06 FN9244ESB-8-06 FN924ESB-8-06 FN924ESB