AC Filter Cost Optimized



See below:

Approvals and Compliances

Description

- Line filter in standard and medical version
- 1-stage
- standard attenuation

Characteristics

- Designed for universal industrial applications
- High attenuation at maximum resp. asymmetric load independent from the line impedance

Protection against interference voltage from the mains Possible interferences generated in the equipment are strongly attenu-

- Especially designed for industrial applications such as: Frequency Converters, Stepper Motor Drives, UPS-Systems, Inverters
- Suitable for use in equipment according to IEC/UL 62368-1 Suitable for use in medical equipment according to IEC/UL 60601-1 (1 MOOP, 1 MOPP)

Other versions on request

· Version with wire connection

References

Alternative: Standard version

We recommend for new applications the type FMAB NEO

pdf data sheet, html datasheet, General Product Information, Approvals, Distributor-Stock-Check, Detailed request for product, Microsite

| Technical Data | |
|----------------------------|---|
| Ratings IEC | 6 - 20 A @ Ta 40 °C / 250 VAC; 50 Hz |
| Ratings UL/CSA | 6 - 20 A @ Ta 40 °C / 125 VAC; 60 Hz |
| Leakage Current | standard < 0.35 mA (250 V / 60 Hz) |
| Dielectric Strength | 1.7 kVDC between L-N |
| | 2.7 kVDC between L/N-PE |
| | Test voltage (2 sec) |
| Allowable Operation Tempe- | -25°C to 100°C |
| rature | |
| Climatic Category | 25/100/21 acc. to IEC 60068-1 |
| Protection Class | Suitable for appliances with protection |
| | class I acc. to IEC 61140 |
| Terminal | Quick connect terminals 6.3 x 0.8 mm |
| Material: Housing | Nickel plated steel |

| Line Filter | Standard and Medical Version, IEC 60939, UL 1283, CSA C22.2 no. 8 Technical Details |
|-------------|---|
| MTBF | > 200'000h acc. to MIL-HB-217 F |

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: FMLB

| Approval Logo | Certificates | Certification Body | Description |
|-----------------|---------------|--------------------|------------------------------|
| 1 0 | VDE Approvals | VDE | Certificate Number: 40004673 |
| c FU °us | UL Approvals | UL | UL File Number: E72928 |

Product standards

Product standards that are referenced

| Organization | Design | Standard | Description |
|--------------|-----------------------|-----------------|--|
| <u>IEC</u> | Designed according to | IEC 60939 | Passive filters for suppressing electromagnetic interference |
| (I) | Designed according to | UL 1283 | Electromagnetic interference filters |
| CSA Group | Designed according to | CSA C22.2 no. 8 | Electromagnetic interference (EMI) filters |

Application standards

Application standards where the product can be used


| Organization | Design | Standard | Description |
|--------------|--------------------------------|----------------|--|
| <u>IEC</u> | Designed for applications acc. | IEC/UL 62368-1 | Audio/video, information and communication technology equipment - Part 1: Safety requirements |
| <u>IEC</u> | Designed for applications acc. | IEC 60601-1 | Medical electrical equipment - Part 1: General requirements for basic safety and essential performance |

Compliances

The product complies with following Guide Lines


| Identification | Details | Initiator | Description |
|----------------|--------------------------------|-------------|---|
| CE | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
| UK CA | UKCA declaration of conformity | SCHURTER AG | The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008. |
| RoHS | RoHS | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863 |
| © | China RoHS | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS. |
| REACH | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |
| | Medical Equipment | SCHURTER AG | Suitable for use in medical equipment according to IEC/UL 60601-1 (1 MOOP, 1 MOPP) |

Dimension [mm]

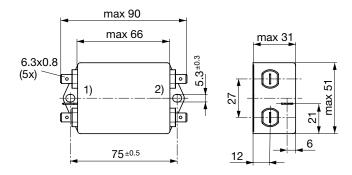


Diagrams


Standard version



2) Load Medical Version (M80) Medical Version (M5)







10 A

Attenuation Loss

Standard version

6 A

dB 80 60 40 40 40 MHz

dB 80 60 40 20 0.01 0.1 1 10 100 400 MHz 16 A 20 A


- - - - 50Ω differential mode _

dB 80 60 40 20 0


 50Ω common mode

Medical version (M5)







10 A



16 A




20 A




Medical version (M80)


6 A




10 A



16 A



20 A



All Variants

| Rated Current [A] | Filter-Type | L [mH] | Cx (X2) [μF] | Cy (Y2) [nF] | Weight [g] | Housing | Order Number | _ |
|----------------------|-----------------------|---------|--------------|--------------|---------------|---------|--------------|---|
| 6 | Standard version | 2 x 14 | 0.1 | 3.3 | 212 g | 49 | 5500.2035 | |
| 10 | Standard version | 2 x 5 | 0.1 | 3.3 | 212 g | 49 | 5500.2036 | |
| 16 | Standard version | 2 x 2 | 0.1 | 3.3 | 208 g | 49 | 5500.2037 | |
| 20 | Standard version | 2 x 1.5 | 0.1 | 3.3 | 218 g | 49 | 5500.2038 | |
| 6 | Medical Version (M5) | 2 x 14 | 0.1 | - | 212 g | 49 | 5500.2082 | |
| 10 | Medical Version (M5) | 2 x 5 | 0.1 | - | 212 g | 49 | 5500.2083 | |
| 16 | Medical Version (M5) | 2 x 2 | 0.1 | - | 208 g | 49 | 5500.2084 | |
| 20 | Medical Version (M5) | 2 x 1.5 | 0.1 | - | 218 g | 49 | 5500.2085 | |
| 6 | Medical Version (M80) | 2 x 14 | 0.1 | 0.47 | 212 g | 49 | 5500.2094 | |
| 10 | Medical Version (M80) | 2 x 5 | 0.1 | 0.47 | 212 g | 49 | 5500.2095 | |
| 16 | Medical Version (M80) | 2 x 2 | 0.1 | 0.47 | 208 g | 49 | 5500.2096 | |
| 20 | Medical Version (M80) | 2 x 1.5 | 0.1 | 0.47 | 218 g | 49 | 5500.2097 | |

Most Popular.

 $Availability for all products can be searched real-time: \\https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER$

Packaging unit

10 Pcs

information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each

product selected for their own applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Line Filters category:

Click to view products by Schurter manufacturer:

Other Similar products are found below:

6609019-3 6609026-5 6609030-6 6609973-2 D30A 7-1609090-5 F2810 F4456A F7382Z F7863Z FAHAV3100ZC000 806276 FN2020B1-06 FN2080B-10-06 FN2410H-32-33 FP144 FS4153-20-06 FS4353-500-99 12-MMB-030-11-D DB4-393 15811T200 20B1 LC630 2B1
1609080-2 1609993-8 1-6609070-1 F1100AA02 F1150CC10 F1500CA10 F1500CA15 F4041Z F7585E 1B1 FN2070A-16-06 FN2090A20-06 FN2090B-12-06 FN2090Z-1-06 FN2410H-25-33 FN2410H-60-34 FN2410H-8-44 FN2412H-8-44 FN323B-6-01 FN3258H-130-35
FN610R-3-06 20EHQ7 20EHZ7 20K1 30B6 3K1