



24 x 48mm

Features :

- 8 digits LCD Time Totaliser
- Self Powered
- Long battery Life
- Contact / Voltage Input

Certification : **CE**

Display Specifications

Display	8 digits LCD Time Totaliser
---------	-----------------------------

Input Specifications

Input Type	a) 24 to 260V AC b) Contact input
Accuracy	0.05%

Functional Specifications

Ranges	a) 1999.59.59hr:min:sec b) 199999.99hr
Counting Direction	Up
Memory	5 Years
Reset	Front (Only for LT920A), Remote

Auxiliary Supply Specifications

Supply Voltage	Battery powered
----------------	-----------------


Environmental Specifications

Temperature	Operating : 0 to 50°C (32 to 122°F) Storage : -20 to 75°C (-4 to 167°F)
Humidity (non - condensing)	95% RH


Mechanical Specifications

Mounting	Panel Mount
Weight	60gms

Dimensions

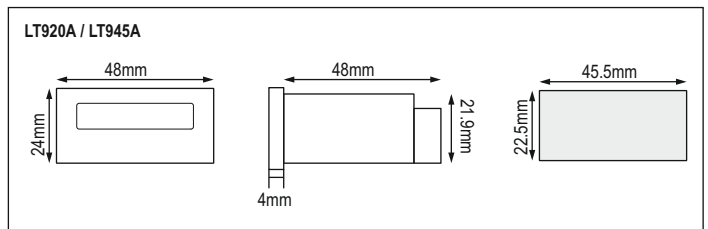

Terminal Connections

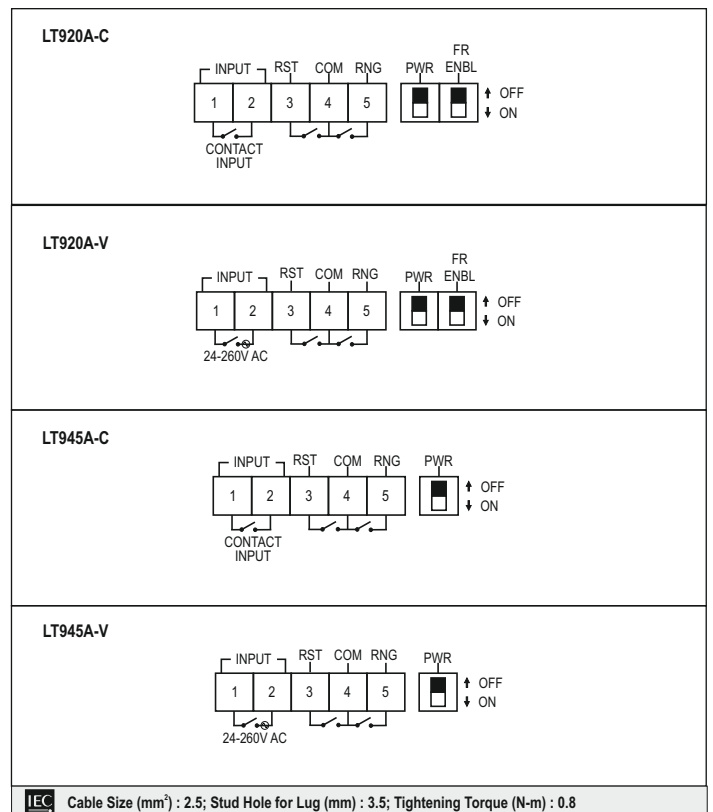

IEC Cable Size (mm²) : 2.5; Stud Hole for Lug (mm) : 3.5; Tightening Torque (N-m) : 0.8

Compliance

Applicable EMI / EMC Standards		
Product Standard		
Category	Reference Standards	Testing Level
Electrostatic Discharge	IEC 61000-4-2	Level-3
Electrical Fast Transient / Brust	IEC 61000-4-4	Level-3
Electromagnetic Field	IEC 61000-4-3	Level-3
Surge	IEC 61000-4-5	Level-3
Conducted RF	IEC 61000-4-6	Level-2
Rated Power Frequency	IEC 61000-4-8	Level-4
Voltage Dip / Short Interruptions	IEC 61000-4-11	Level-3
Conducted Emissions	CISPR-11	Class-B
Rated Emissions	CISPR-22	Class-A
Emission & Immunity	IEC 61326-1	
Safety	IEC 61010-1	
PFMF (Passing criteria)	IEC 61000-4-8	Class A

Ordering Information

Product Code	Input Type		Certification
	Contact	Voltage	
LT920A-C	Yes	---	---
LT920A-V	---	Yes	---
LT945A-C	Yes	---	---
LT945A-V	---	Yes	---
LT920A-C-CE	Yes	---	CE
LT920A-V-CE	---	Yes	CE
LT945A-C-CE	Yes	---	CE
LT945A-V-CE	---	Yes	CE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SELEC manufacturer](#):

Other Similar products are found below :

[900CPR-1-BL-U-CE](#) [900CPR-3-1-BL-230V-CE](#) [900ELR-2-230V-CE-ROHS](#) [900VPR-2-280/600-CE-ROHS](#) [900VPR-BL-U-CE](#) [AM-I-2-5-CE](#) [AM-I-3-5-250-CE](#) [AM-I-3-5-CE](#) [AM-I-D-2-100A-CE](#) [AM-I-D-2-10A-CE](#) [AM-I-D-2-20A-CE](#) [AM-I-D-2-30A-CE](#) [AM-I-D-2-40A-CE](#) [AM-I-D-2-50A-CE](#) [AM-V-2-L-CE](#) [AM-V-2-N-CE](#) [AM-V-3-L-CE](#) [AM-V-3-N-CE](#) [APFC147-108-90/550V-CE](#) [APFC347-108-230V-CE-ROHS](#) [CBCT-120-1-CE](#) [CBCT-210-1-CE](#) [CBCT-310-1-CE](#) [CBCT-35-1-CE](#) [CBCT-70-1-CE](#) [EM2M-1P-C-100A-CE](#) [EM368-C-CU](#) [EM4M-3P-C-100A](#) [IPCOVER-3](#) [LT945A-C-CE](#) [LTC9A-CE](#) [MA2301-230V-CE](#) [MA501-230V-CE](#) [MFM376-C-CE-ROHS](#) [MFM383A-C-CE](#) [MFM384-C-CU-G-ROHS](#) [MFM384-R-C-CE](#) [MV15-230V-CE](#) [MV507-CU](#) [SCL-AM-I-2-1000/5A](#) [SCL-AM-I-2-100/5A](#) [SCL-AM-I-2-150/5A](#) [SCL-AM-I-2-1600/5A](#) [SCL-AM-I-2-300/5A](#) [SCL-AM-I-2-400/5A](#) [SCL-AM-I-2-600/5A](#) [SCL-AM-I-2-60/5A](#) [SCL-AM-I-2-75/5A](#) [SCL-AM-I-2-800/5A](#) [SCL-AM-I-3-1000/5A](#)