

### SEMIPACK® 1

## Thyristor / Diode Modules

### SKKT 20

### SKKT 20B

### Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E 63 532

### Typical Applications\*

- DC motor control (e. g. for machine tools)
- AC motor soft starters
- Temperature control (e. g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

<sup>1)</sup> See the assembly instructions

$V_{RSM}$	$V_{RRM}, V_{DRM}$	$I_{TRMS} = 40 \text{ A}$ (maximum value for continuous operation) $I_{TAV} = 20 \text{ A}$ (sin. 180; $T_c = 80^\circ\text{C}$ )		
V	V			
900	800	SKKT 20/08E	SKKT 20B08E	
1300	1200	SKKT 20/12E	SKKT 20B12E	
1500	1400	SKKT 20/14E	SKKT 20B14E	
1700	1600	SKKT 20/16E	SKKT 20B16E	

Symbol	Conditions	Values	Units
$I_{TAV}$	sin. 180; $T_c = 85 (100)^\circ\text{C}$ ;	18 (13)	A
$I_D$	P3/180; $T_a = 45^\circ\text{C}$ ; B2 / B6	31 / 38	A
	P3/180F; $T_a = 35^\circ\text{C}$ ; B2 / B6	46 / 60	A
$I_{RMS}$	P3/180; $T_a = 45^\circ\text{C}$ ; W1 / W3	42 / 3 * 30	A
$I_{TSM}$	$T_{vj} = 25^\circ\text{C}; 10 \text{ ms}$ $T_{vj} = 125^\circ\text{C}; 10 \text{ ms}$	320 280	A
$i^2t$	$T_{vj} = 25^\circ\text{C}; 8,3 \dots 10 \text{ ms}$ $T_{vj} = 125^\circ\text{C}; 8,3 \dots 10 \text{ ms}$	510 390	$\text{A}^2\text{s}$
$V_T$	$T_{vj} = 25^\circ\text{C}; I_T = 75 \text{ A}$	max. 2,3	V
$V_{T(TO)}$	$T_{vj} = 125^\circ\text{C}$	max. 1	V
$r_T$	$T_{vj} = 125^\circ\text{C}$	max. 16	$\text{m}\Omega$
$I_{DD}, I_{RD}$	$T_{vj} = 125^\circ\text{C}; V_{RD} = V_{RRM}; V_{DD} = V_{DRM}$	max. 10	mA
$t_{gd}$	$T_{vj} = 25^\circ\text{C}; I_G = 1 \text{ A}; di_G/dt = 1 \text{ A}/\mu\text{s}$	1	$\mu\text{s}$
$t_{gr}$	$V_D = 0,67 * V_{DRM}$	1	$\mu\text{s}$
$(di/dt)_{cr}$	$T_{vj} = 125^\circ\text{C}$	max. 150	$\text{A}/\mu\text{s}$
$(dv/dt)_{cr}$	$T_{vj} = 125^\circ\text{C}$	max. 1000	$\text{V}/\mu\text{s}$
$t_q$	$T_{vj} = 125^\circ\text{C}$ ,	80	$\mu\text{s}$
$I_H$	$T_{vj} = 25^\circ\text{C}$ ; typ. / max.	100 / 200	mA
$I_L$	$T_{vj} = 25^\circ\text{C}; R_G = 33 \Omega$ ; typ. / max.	250 / 400	mA
$V_{GT}$	$T_{vj} = 25^\circ\text{C}$ ; d.c.	min. 3	V
$I_{GT}$	$T_{vj} = 25^\circ\text{C}$ ; d.c.	min. 150	mA
$V_{GD}$	$T_{vj} = 125^\circ\text{C}$ ; d.c.	max. 0,25	V
$I_{GD}$	$T_{vj} = 125^\circ\text{C}$ ; d.c.	max. 5	mA
$R_{th(j-c)}$	cont.; per thyristor / per module	1,2 / 0,6	K/W
$R_{th(j-c)}$	sin. 180; per thyristor / per module	1,3 / 0,65	K/W
$R_{th(j-c)}$	rec. 120; per thyristor / per module	1,35 / 0,68	K/W
$R_{th(c-s)}$	per thyristor / per module	0,2 / 0,1	K/W
$T_{vj}$		- 40 ... + 125	°C
$T_{stg}$		- 40 ... + 125	°C
$V_{isol}$	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 / 3000	V~
$M_s$	to heatsink	5 ± 15 % <sup>1)</sup>	Nm
$M_t$	to terminal	3 ± 15 %	Nm
$a$		5 * 9,81	$\text{m}/\text{s}^2$
$m$	approx.	95	g
Case	SKKT SKKT ...B	A 46 A 48	



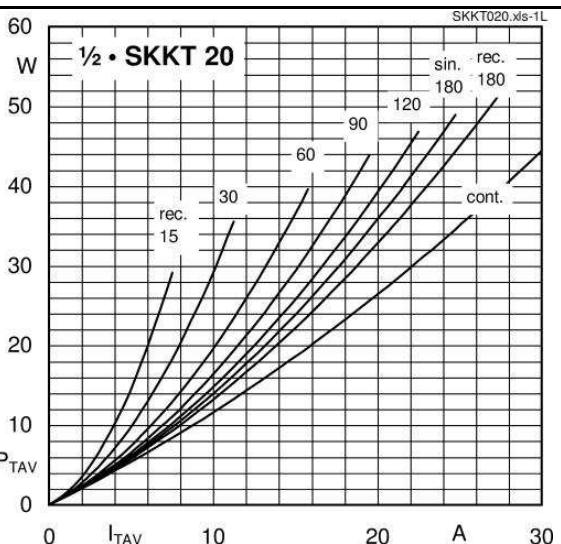


Fig. 1L Power dissipation per thyristor vs. on-state current

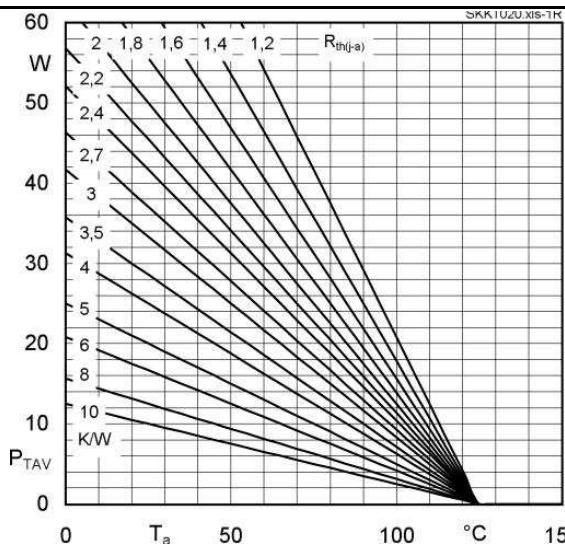


Fig. 1R Power dissipation per thyristor vs. ambient temp.

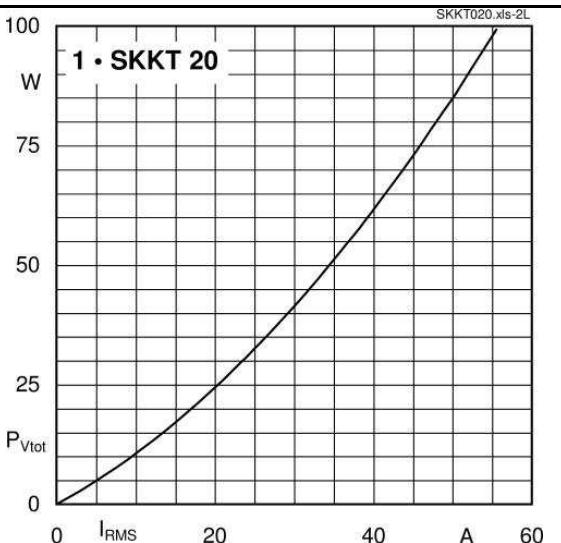


Fig. 2L Power dissipation per module vs. rms current

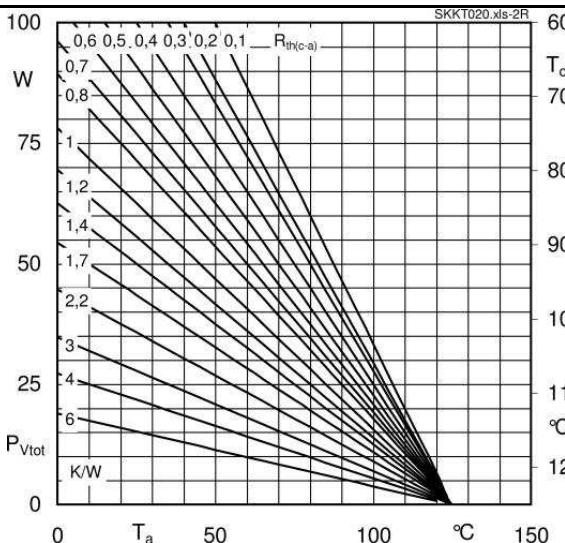


Fig. 2R Power dissipation per module vs. case temp.

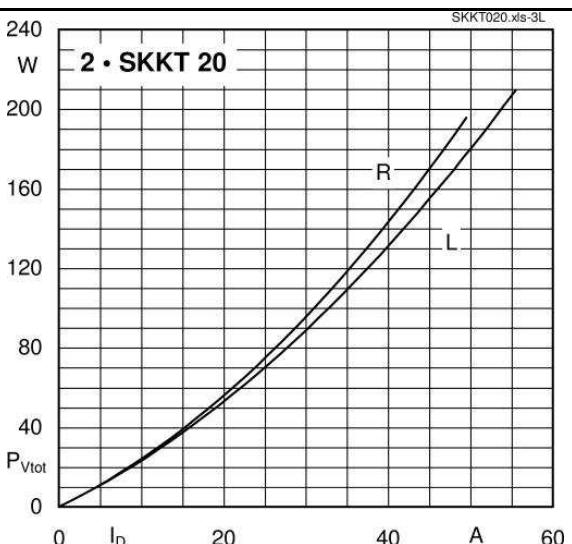


Fig. 3L Power dissipation of two modules vs. direct current

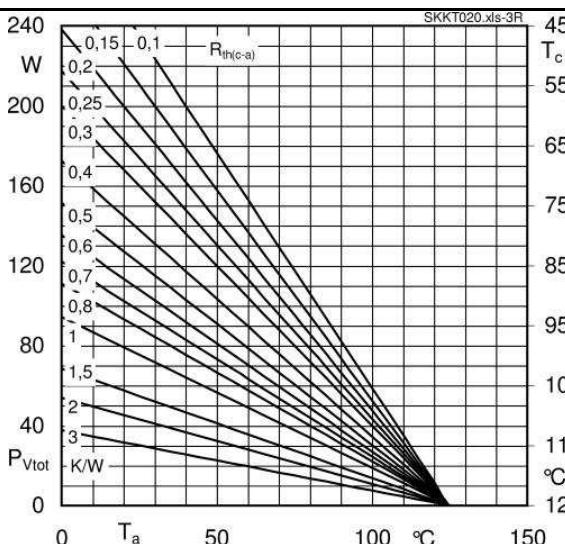


Fig. 3R Power dissipation of two modules vs. case temp.

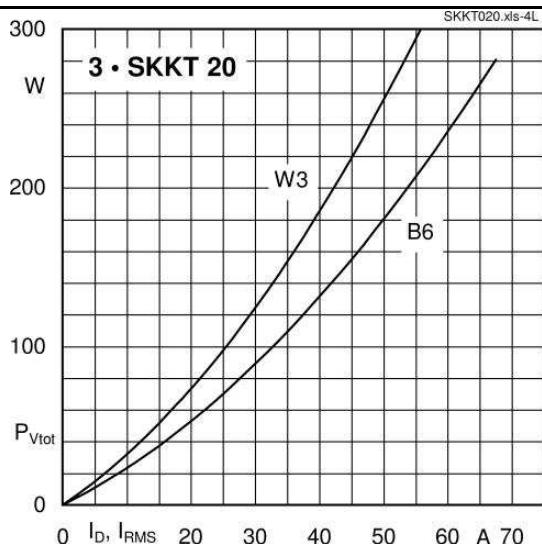


Fig. 4L Power dissipation of three modules vs. direct and rms current

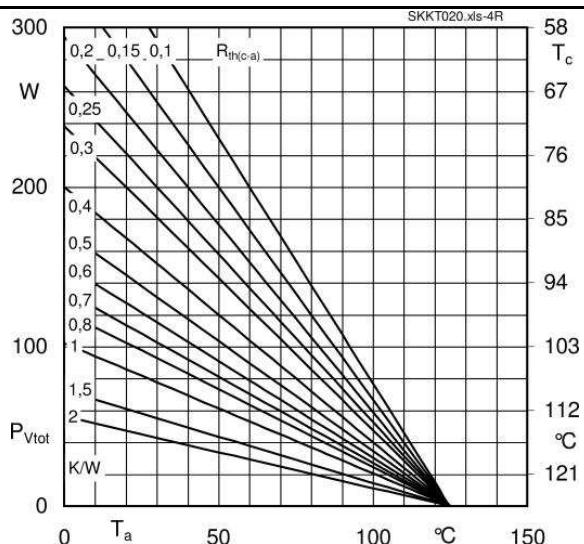


Fig. 4R Power dissipation of three modules vs. case temp.

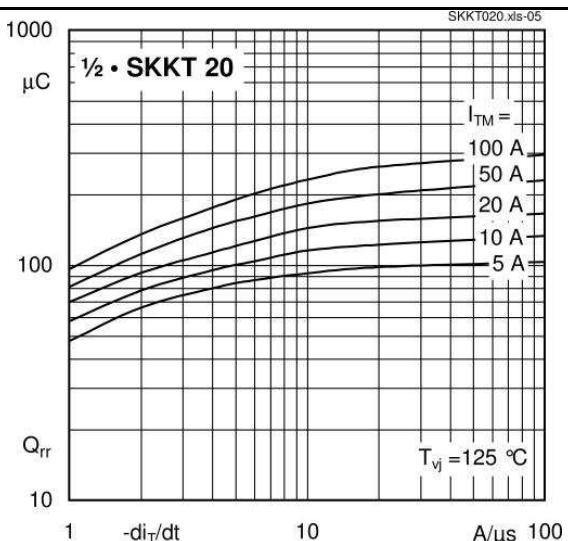


Fig. 5 Recovered charge vs. current decrease

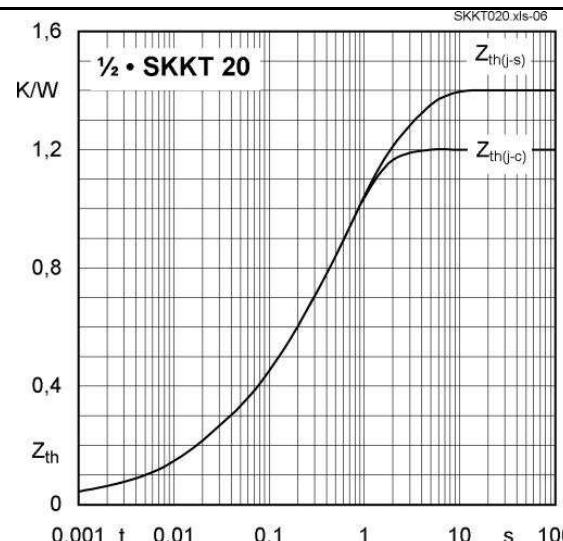


Fig. 6 Transient thermal impedance vs. time

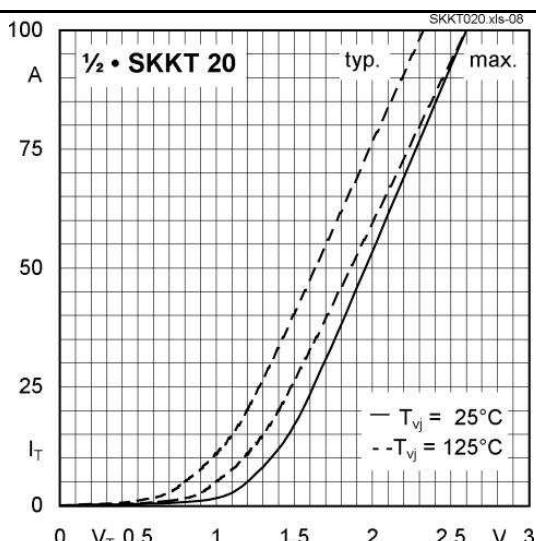


Fig. 7 On-state characteristics




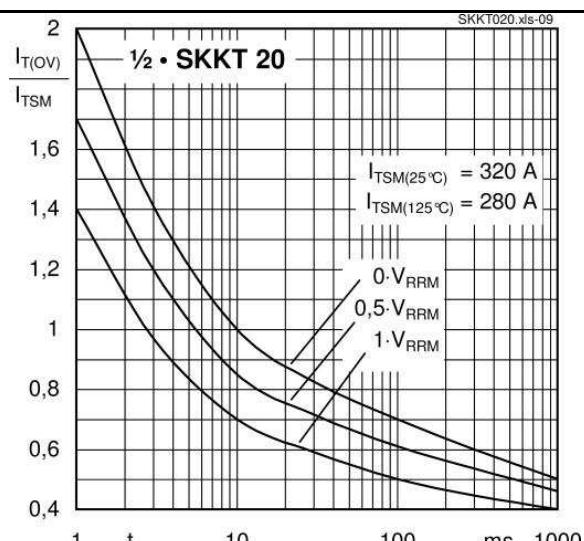


Fig. 8 Surge overload current vs. time

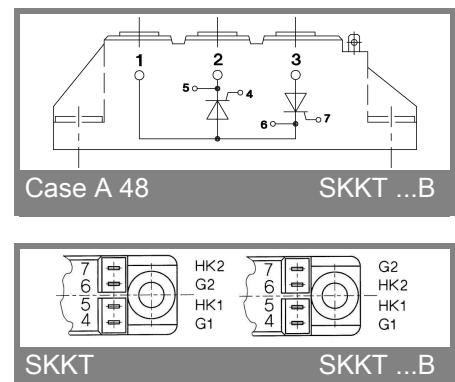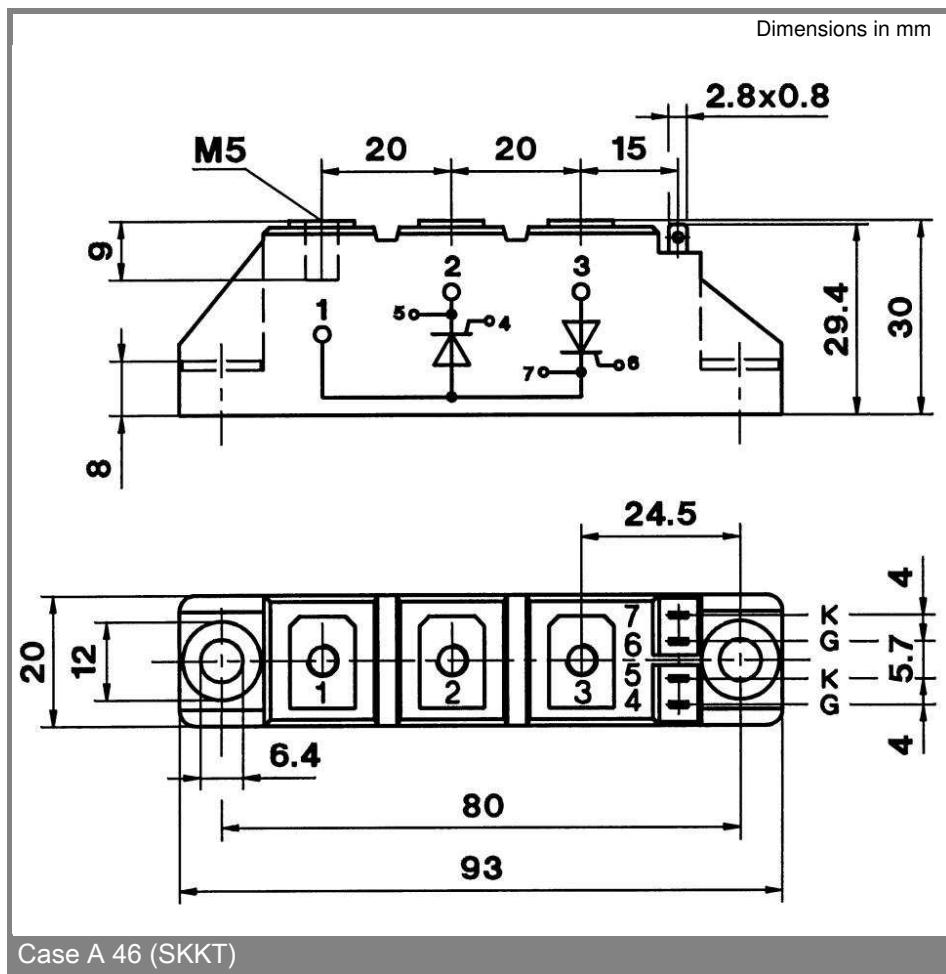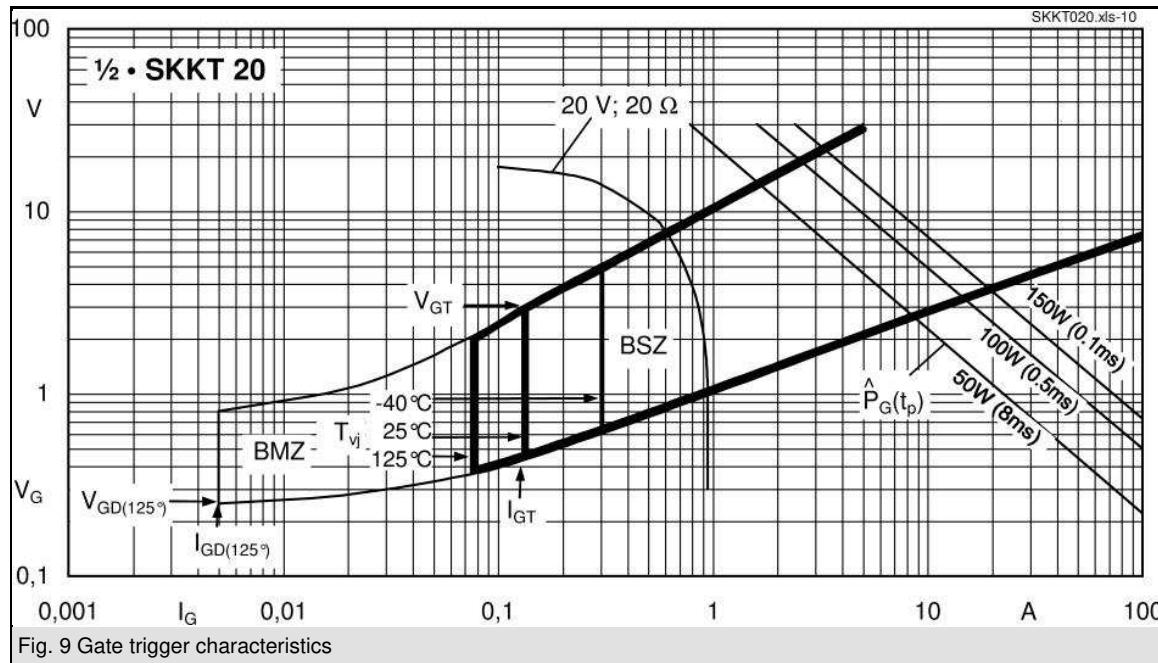

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for SCR Modules category:***

***Click to view products by Semikron manufacturer:***

Other Similar products are found below :

[DT430N22KOF](#) [T1401N42TOH](#) [T1851N60TOH](#) [T390N14TOF](#) [T420N12TOF](#) [T470N16TOF](#) [T640N16TOF](#) [T901N36TOF](#) [TD140N18KOF](#)  
[TD142N16KOF](#) [TD162N16KOF-A](#) [TD250N12KOF](#) [TD330N16AOF](#) [TT215N22KOF](#) [TZ310N20KOF](#) [TZ425N12KOF](#) [TZ500N12KOF](#)  
[T300N14TOF](#) [T3710N06TOF VT](#) [T390N16TOF](#) [T460N24TOF](#) [T501N70TOH](#) [T560N16TOF](#) [T640N14TOF](#) [TD250N14KOF](#)  
[TT600N16KOF](#) [TZ500N16KOF](#) [TZ240N36KOF](#) [TT210N12KOF](#) [NTE5710](#) [TD180N16KOF](#) [TT240N28KOF](#) [TZ425N14KOF](#)  
[T1081N60TOH](#) [TT61N08KOF](#) [TD251N18KOF](#) [TT162N08KOF](#) [TZ430N22KOF](#) [TT180N12KOF](#) [T2001N34TOF](#) [TD140N22KOF](#)  
[MDMA200P1600SA](#) [TT180N16KOF](#) [VS-ST333C08LFM0](#) [VS-ST180C14C0L](#) [T1080N02TOF](#) [TD320N16SOF](#) [T360N22TOF](#)  
[TZ810N22KOF](#) [T2563NH80TOH](#)