

January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

AXIAL LEADED HERMETICALLY SEALED HIGH VOLTAGE STANDARD RECOVERY RECTIFIER DIODE

QUICK REFERENCE DATA


- High thermal shock resistance
- Hermetically sealed with Metoxillite fused metal oxide
- Multi-junction construction
- Low reverse leakage currents
- Subminiature body size

- $V_R = 2kV - 3kV$
- $I_F = 600mA$
- $t_{rr} = 2.5\mu S$
- $I_R = 1.0\mu A$

ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	1N3645 SM20	1N3646 SM25	1N3647 SM30	Unit
Working reverse voltage	V_{RWM}	2000	2500	3000	V
Repetitive reverse voltage	V_{RRM}	2000	2500	3000	V
Average forward current (@ 55°C in oil)	$I_{F(AV)}$	← 600 →			mA
Repetitive surge current (@ 55°C in oil, lead length 0.375")	I_{FRM}	← 2.5 →			A
Non-repetitive surge current ($t_p = 8.3ms$, @ V_R & T_{jmax})	I_{FSM}	← 14 →			A
Storage temperature range	T_{STG}	← -65 to +175 →			°C
Operating temperature range	T_{OP}	← -65 to +175 →			°C

MECHANICAL

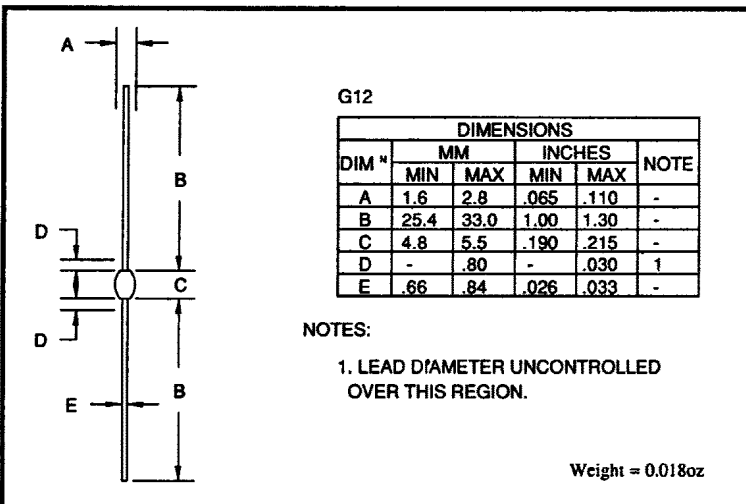

These products are qualified to MIL-S-19500/279 and are preferred parts as listed in MIL-STD-701. They can be supplied fully released as JAN and JANTX versions.

These products are available in Europe to DEF STAN 59-61 (PART 80)/034.

January 7, 1998

CHARACTERISTICS (@ 25°C unless otherwise specified)

	Symbol	1N3645 SM20	1N3646 SM25	1N3647 SM30	Unit
Average forward current for sine wave - max. pcb mounted	$I_{F(AV)}$	← 260 →			mA
- max. in unstirred oil	$I_{F(AV)}$	← 600 →			mA
I^2t for fusing (t = 8.3ms) max.	I^2t	← 0.026 →			A ² S
Forward voltage drop max. @ $I_F = 250\text{mA}$, $T_j = 25^\circ\text{C}$	V_F	← 5.00 →			V
Reverse current max. @ V_{RWM} , $T_j = 25^\circ\text{C}$	I_R	← 1.00 →			μA
@ V_{RWM} , $T_j = 100^\circ\text{C}$	I_R	← 20.0 →			μA
Reverse recovery time max. 50mA I_F to 100mA I_R . Recover to 25mA I_{RR} .	t_{rr}	← 2.5 →			μS
Junction capacitance typ. @ $V_R = 5\text{V}$, $f = 1\text{MHz}$	C_j	← 8.0 →			pF
Thermal resistance - junction to oil Unstirred @ 55°C	$R_{\theta JO}$	← 30.0 →			$^\circ\text{C/W}$
Stirred @ 55°C	$R_{\theta JO}$	← 18.0 →			$^\circ\text{C/W}$
Thermal resistance - junction to amb. on 0.06" thick pcb. 1oz copper.	$R_{\theta JA}$	← 90.0 →			$^\circ\text{C/W}$

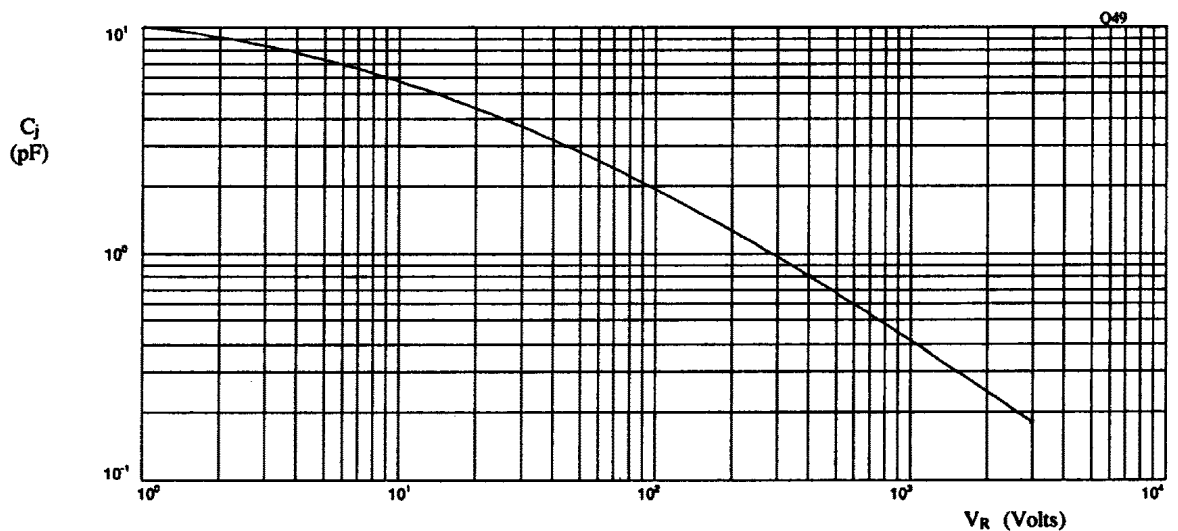


Fig 1. Typical junction capacitance as a function of reverse voltage.

January 7, 1998

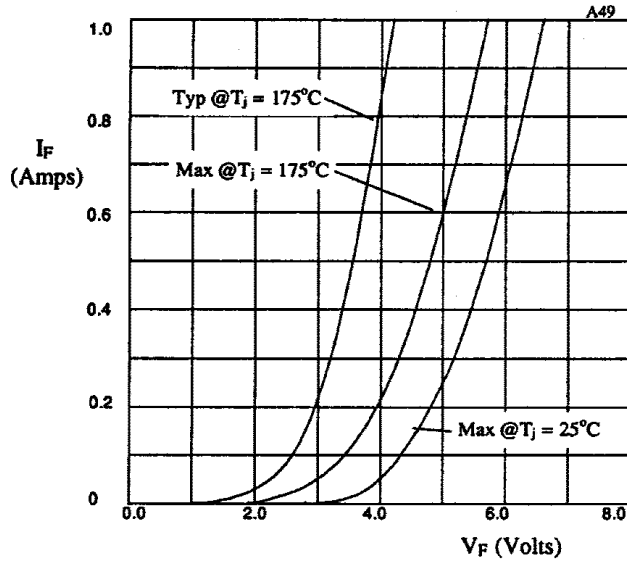


Fig 2. Forward voltage drop as a function of forward current.

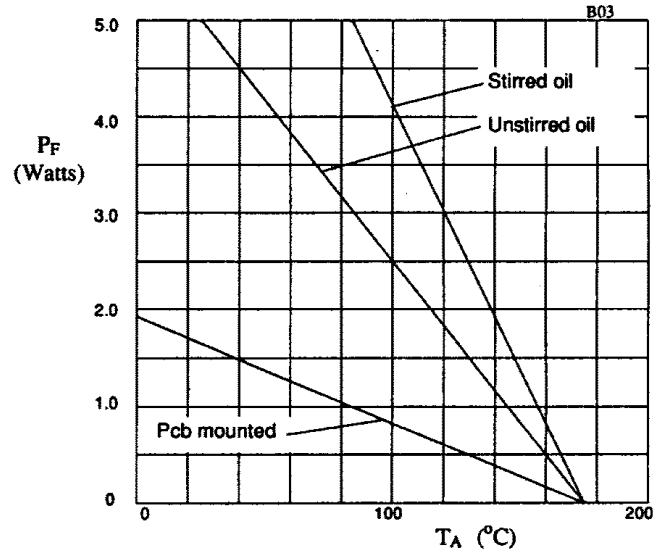


Fig 3. Power derating in oil and air.

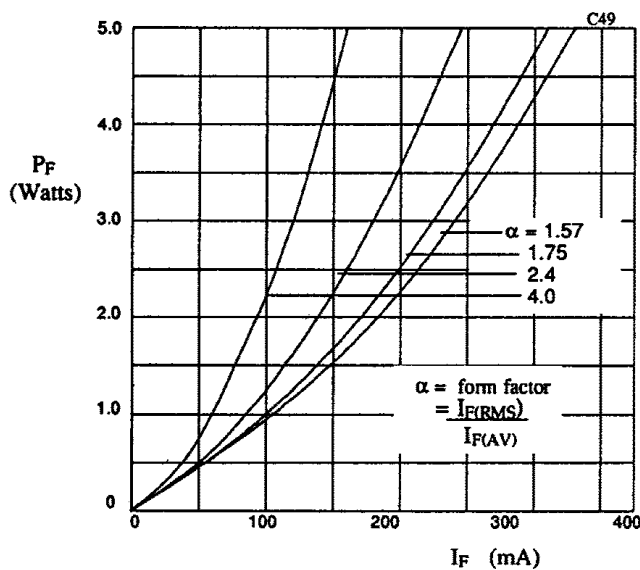


Fig 4. Forward power dissipation as a function of forward current, for sinusoidal operation.

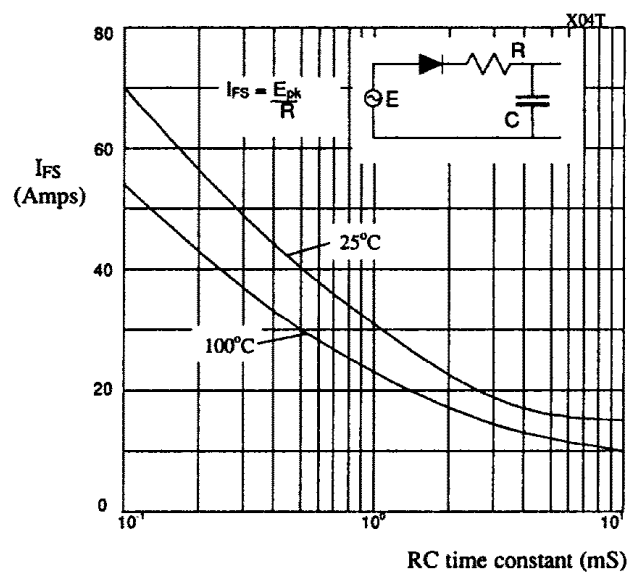


Fig 5. Maximum ratings for capacitive loads.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#) [ACGRA4007-HF](#)
[ACGRB207-HF](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#)
[85HFR60](#) [40HFR60](#) [1N1186RA](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#)
[VS-12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#) [NTE6162](#)