

Transient Voltage Suppressors for ESD protection

DESCRIPTION

The SBD52C05L01 is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

This device has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD (electrostatic discharge), CDE (Cable Discharge Events), and EFT (electrical fast transients).

FEATURES

- ✧ IEC61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
- ✧ IEC61000-4-4 (EFT) 40A (5/50ns)
- ✧ Peak power dissipation: 200W (8/20 μs)
- ✧ Protects one directional I/O line
- ✧ Low clamping voltage
- ✧ Working voltages : 5V
- ✧ Low leakage current

MACHANICAL DATA

- ✧ SOD-523 package
- ✧ Terminals: Gold plated, solderable per MIL-STD-750, method 2026
- ✧ Packaging: Tape and Reel
- ✧ Reel size: 7 inch
- ✧ MSL1


ORDERING INFORMATION

- ✧ Device: SBD52C05L01
- ✧ Package: SOD-523
- ✧ Marking: 5C
- ✧ Material: Halogen free
- ✧ Packing: Tape & Reel
- ✧ Quantity per reel: 3,000pcs

APPLICATIONS

- ✧ High Speed Line :USB1.0/2.0, VGA, DVI, SDI,
- ✧ Serial and Parallel Ports
- ✧ Notebooks, Desktops, Servers
- ✧ Projection TV
- ✧ Cellular handsets and accessories
- ✧ Portable instrumentation
- ✧ Peripherals

PIN CONFIGURATION

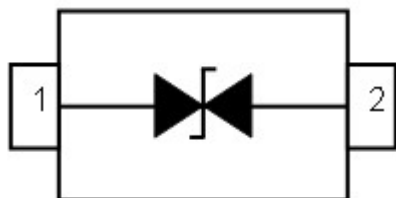

PACKAGE OUTLINE




ABSOLUTE MAXIMUM RATING

| Symbol | Parameter | Value | Units |
|-----------|--|---------------------|-------------|
| V_{ESD} | ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact) | ± 15 ± 8 | kV |
| P_{PP} | Peak Pulse Power (8/20 μ s) | 100 | W |
| T_{OPT} | Operating Temperature | -40~150 | $^{\circ}C$ |
| T_{STG} | Storage Temperature | -40~150 | $^{\circ}C$ |


ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}C$)

| Symbol | Parameter | Test Condition | Min | Typ | Max | Units |
|-----------|---------------------------|-----------------------------------|-----|-----|------|---------|
| V_{RWM} | Reverse Working Voltage | | | | 5.0 | V |
| V_{BR} | Reverse Breakdown Voltage | $I_T = 1mA$ | 5.6 | | 7.8 | V |
| I_R | Reverse Leakage Current | $V_{RWM} = 5V$ | | | 1.0 | μA |
| V_C | Clamping Voltage | $I_{PP} = 5A, t_p = 8/20\mu s$ | | | 11.6 | V |
| V_C | Clamping Voltage | $I_{PPmax} = 8A, t_p = 8/20\mu s$ | | | 16.0 | V |
| C_J | Junction Capacitance | $V_R = 0V, f = 1MHz$ | | 10 | 15 | pF |

ELECTRICAL CHARACTERISTICS CURVE

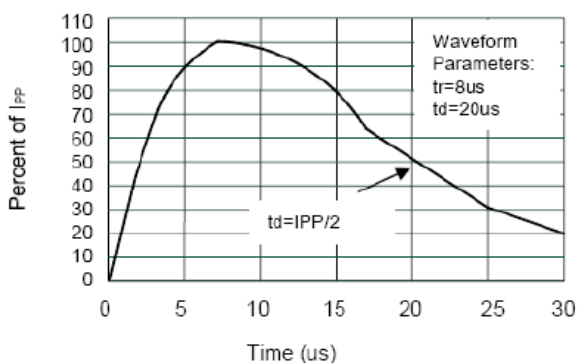


Pulse Waveform

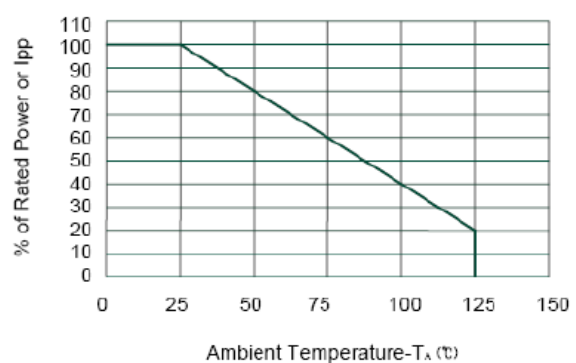

Power Derating Curve

SOD-523 PACKAGE OUTLINE DIMENSIONS

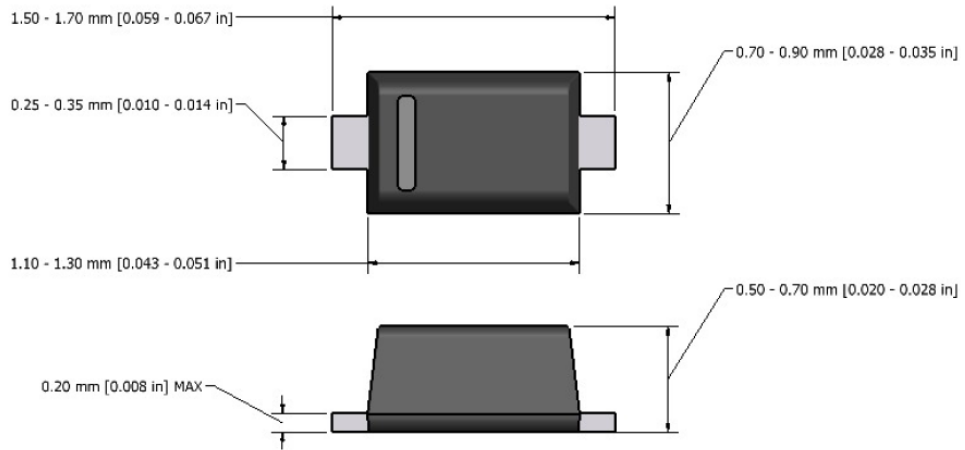

Note: Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [SLKORMICRO](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)