

# PW183RA

Universal 32 Watt (IEEE802.3af Non-Compliant)



## PoE Plus Gigabit

- 10/100/1000 (MbPS) Data Rates
- Self-contained Injector
- 100-250VAC Universal Input
- Desktop Style / Non-vented Case
- IEEE802.3af Non-Compliant
- Power ON LED
- UNH IOL Test Report
- Over Load Shutdown and Short Circuit Protection
- Regulated Output With Low Ripple
- Complies with EMI/RFI Regulations
- CE Compliant



### International Safety Standard Approvals



## Specifications

### Output Specifications

Combined Line and Load Voltage Regulation	Excluding Cord	±1%
Ripple		1% Vp-p max.
Transient Response		0.5ms for 50% Load Change Typical
Protection		Foldback Overcurrent Protection, Short Circuit Protection

### Input Specifications

AC Input Voltage Range		100-250VAC -10%, +6%
Line Frequency		47-63Hz
AC Input Current		1A max.
Protection		Internal Primary Current Fuse, Inrush Limiting

### Environmental Specifications

Thermal Performance	Operating Temperature No Derating, Convectional Cooling Non Vented Case	0° C to 40° C
Relative Humidity	Non-Condensing	5% to 95%
Altitude		0-10,000 feet

### General Specifications

Topology		Switching-Fixed Frequency Flyback
Dielectric Withstand	Primary-Secondary Secondary-Ground	3000VAC, 4250VDC 500VDC
Spacing		5mm Primary-Secondary
Leakage Current		Less than 250 uA
Efficiency		75.1% min.
EMC Information Emissions	FCC Part 15. EN55022.	Class B Class B
Harmonic VFF	EN61000-3-2 EN61000-3-3	
ESD	EN61000-4-2.	Level 2
RF EMI	EN61000-4-3.	Level 2
EFT	EN61000-4-4.	Level 2
Surge	EN61000-4-5.	Level 3
CDI	EN61000-4-6.	Level 2
CD	EN61000-4-8.	Level 1
Voltage Dips	EN61000-4-11	
CE		LVD, EMC, RoHS, WEEE, CE Compliant
Hold-up Time	@120VAC	18ms min. typ.
Storage Temp		-30° C to +85° C
Approvals and Standards	Safety	cULus : UL/CSA60950 TUV : EN60950 CE: LVD, EMCD

# PW183RA

Universal 32 Watt (IEEE802.3af Non-Compliant)

PoE Plus Gigabit

For the most current data and application support visit [www.slpower.com](http://www.slpower.com)

Ault Part Number	Output Voltage	Output Currents		Max Watts	Ripple Vp-p max.
		Min	Max		
PW183RA4800_01	48 V	0.00 A	0.67 A	32 W	480 mV

## Ault Part Number Key

Product Family Name	Manufacturing Location (volume dependent)	Design Revision Changes	Voltage DC Model Type	Connector	Input Configuration/ Model Type	Standard (no modifications or special packaging)
PW183	R	A	48	00	-	01

## Input Configuration



IEC320  
w/ground  
C14  
(F)



Shaver  
C8  
(N)

Specify the Input Configuration Code in your order.

## General Specifications (continued from p. 1)


MTBF		100,000 Calculated Hours
Weight	(excluding cord)	7 Ounces, 200 Grams
Case and Dimension		5.24L x 2.13W x 1.42H (in) 133.0L x 54.0W x 36.0H (mm)
Case Material		Black 94V0 Polycarbonate
Cord and Connectors		Dual RJ45 jacks built into the enclosure

## Personalized PoE

Options (additional costs may apply):

- Custom label artwork
- Custom agency approvals available
- Surge protection (Input & Output)
- Mounting bracket
- Custom PoE modifications

## Pin Connections

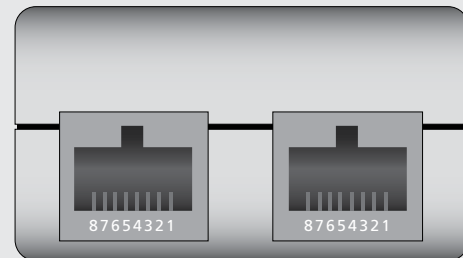

J2  
(Power and Data Out)

J1  
(Data In)

(Rear of Unit)

### PoE Gigabit Pin-out Connections:

Data	← POWER (+) →	Pins 4/5 (Data + PWR)
Data	← →	Pins 1/2 (Data Only)
Data	← →	Pins 3/6 (Data Only)
Data	← POWER (-) →	Pins 7/8 (Data + PWR)

Note: ← → = Transformer



SL Power Electronics Corp • 6050 King Drive • Ventura, CA 93003 • Phone:805.486.4565 • Fax:805.487.8911 • Email:[info@slpower.com](mailto:info@slpower.com) • [www.slpower.com](http://www.slpower.com)

Data Sheet © 2007 SL Power Electronics Corp. The information and specifications contained in this data sheet are believed to be correct at time of publication.

However, SL Power accepts no responsibility for consequences arising from reproduction errors or inaccuracies. Specifications are subject to change without notice.

Rev.12/21/07

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power over Ethernet - PoE category](#):*

*Click to view products by [SI Power manufacturer](#):*

Other Similar products are found below :

[PD-3504G/AC](#) [AWPOE](#) [PD-9601G/AC](#) [PD-9001GO/AC](#) [POE-PS-150-001](#) [PD-9501GO/12-24VDC](#) [PD-6506G/AC/M](#) [PD-9501G/24VDC](#)  
[2703007](#) [POEXRX1](#) [POEXRX4](#) [POEXTX1](#) [2703005](#) [POE-5s-afi](#) [2703006](#) [2703008](#) [PD-9606G/ACDC/M-US](#) [PD-9004G/AC-EU](#) [PD-](#)  
[9501G-SFP/AC-US](#) [PD-3504G/AC-EU](#) [POWER-190W](#) [POWER-110W](#) [POWER-60W](#) [POEXKIT4-NP](#) [POEXKIT1-NP](#) [EKI-2701MPI-AE](#)  
[POE-48I](#) [POE-24IR-CI](#) [POE-24IR](#) [POE-18I](#) [POE14-033](#) [PM8803](#) [POE576U-16AT-N](#) [POE33U-1AT](#) [POE21-240](#) [POE16R-1AFG](#)  
[POE125U-4-AT-N](#) [POE75U-1UP](#) [POE576U-16AT](#) [POE14-120](#) [POE14-050](#) [PD-9001GR/AT/AC-US](#) [PD-9501GR/AC](#) [PIS-0250](#) [POE-HP-](#)  
[24i](#) [POE-48iD](#) [POE-HP-50i](#) [POE-12i](#) [PD-9501GR/SP/AC](#) [POE15M-560](#)