


# .100 CENTERS C Series Probes

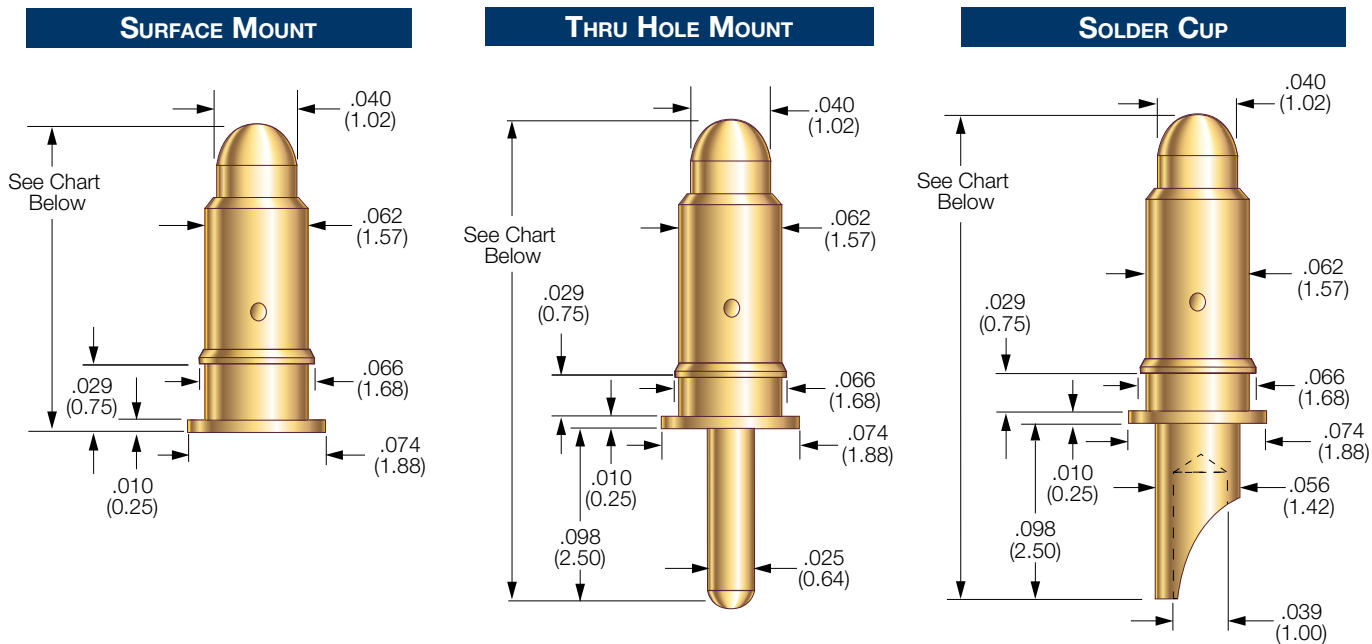

## PROBE SPECIFICATIONS

**Minimum Centers:** .100 (2.54)

**Current Rating:**

- CG Series: 10 amps continuous
- CP Series: 10 amps continuous
- CS Series: .5 amp continuous
- (Individual probe in free air @ ambient temperature)

**Typical Resistances:**

- CG Series: < 10 mΩ
- CP Series: < 10 mΩ
- CS Series: < 60 mΩ

**Spring Force:**

- 3.1 oz. (88g) @ working travel for 4mm compressed length series
- 2.9 oz. (82g) @ working travel for 6mm compressed length series

## MATERIALS

**Barrel:** Brass, gold plated

**Spring:** Stainless steel

**Plunger:**

- CG Series: Brass, gold plated
- CP Series: Brass, gold plated
- CS Series: Brass, Duralloy™ plated

**Special Features:**

- CG Series: Bias plunger design
- CP Series: Bias plunger design
- CS Series: Standard design

**Recommendations:**

- Mounting hole: .064/.065 (1.62/1.65)
- Pad size for Surface Mount: .085 (2.20)
- Wire gage for Solder Cup: 20 gage max.
- Drill size for Thru Hole Tail: .035 (0.89)

## Overall Length

Series	SURFACE Mount	Thru Hole	Solder Cup
CG-2.5-4	.197 (5.00)	.295 (7.50)	.295 (7.50)
CG-2.5-6	.335 (8.50)	.433 (11.00)	.433 (11.00)
CP-2.5-4	.185 (4.70)	.283 (7.20)	.283 (7.20)
CP-2.5-6	.315 (8.00)	.413 (10.50)	.413 (10.50)
CS-2.5-4	.185 (4.70)	.283 (7.20)	.283 (7.20)
CS-2.5-6	.315 (8.00)	.413 (10.50)	.413 (10.50)

## Travel

Series	Working Travel	Maximum Travel
CG-2.5-4	.039 (1.00)	.039 (1.00)
CG-2.5-6	.098 (2.50)	.098 (2.50)
CP-2.5-4	.028 (0.71)	.028 (0.71)
CP-2.5-6	.079 (2.00)	.079 (2.00)
CS-2.5-4	.028 (0.71)	.028 (0.71)
CS-2.5-6	.079 (2.00)	.079 (2.00)

## HOW TO ORDER

**CS**

SERIES

**2.5**

PITCH (MM)

**4**

COMPRESSED LENGTH (MM)

**SM**

TERMINATION

SERIES:  
CG: Ground Connector Probe  
CP: Power Connector Probe  
CS: Signal Connector Probe

4: 4 mm  
6: 6 mm

SM: Surface Mount  
TH: Thru Hole  
SC: Solder Cup

View updates of this information at [www.idinet.com](http://www.idinet.com)

Specifications subject to change without notice. Dimensions in inches (millimeters)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Contact Probes](#) category:*

*Click to view products by [Smiths Interconnect](#) manufacturer:*

Other Similar products are found below :

[CT5253](#) [CT5082](#) [100039-033-958](#) [100077-003-0-0](#) [300122-031-1102](#) [R-2-RP-375](#) [S-4-C-5-G S/C](#) [300122-056-0203](#) [SS-75-B-2.4-G](#) [ICT-100-J-17-G](#) [SS-75-C-4.9-D D/C .620 OAL](#) [100165-033-952](#) [100024-002-942](#) [SS-75-E-4.9-D D/C .620 OAL](#) [SX-0-U-2.2-G D/C](#) [101740-028-948](#) [ICT-100-V8-8-G S/C](#) [ICT-075-B-10-G-S S/C](#) [S-2-D-8.3-G D/C](#) [S-2-D-10-G D/C](#) [GSS-19-7-G S/C OAL](#) [ICT-100-T-8-G S/C](#) [GSS-4-7-G S-0-B9-2.5-G S/C](#) [SS-40-J-2.4-G D/C](#) [S-0-A-2.2-D 660 S/C](#) [SS-50-J-3.3-D S/C](#) [S-0-V-3.7-G S/C](#) [SX-2-B-7-G D/C](#) [SX-1-U-6.6-G D/C](#) [SX-1-C-6.6-G D/C](#) [SS-75-D-4.9-D D/C .620 OAL](#) [SS-50-E-2.9-G S/C](#) [SS-40-J-1.8-G-N/L D/C](#) [SS-3-7-G S/C W/HOLE .373 OAL](#) [SS-18-7-G S/C W/HOLE .405 OAL](#) [SS-10-7-G S/C W/HOLE .373 OAL](#) [SS-1-7-G S/C W/HOLE .385 OAL](#) [SHE-5-H-18.7-G](#) [SHE-5-B-18.7-G](#) [SHE-5-A-18.7-G](#) [SHE-3-A-7-G](#) [SH-4-A-10-G S/C](#) [101057-001-952](#) [S-50C-HS-4.3-DG-S](#) [S-5-F-8-G S/C SS SPGS](#) [S-5-F-16.4-G S/C](#) [S-4-E-5-D S/C](#) [S-2-J-8.3-G D/C](#) [S-2-E-10-G D/C](#)