


RoHS Compliant

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.
 - 2.CONTACTS:COPPER ALLOY
 - 3.MID PLATE: STAINLESS STEEL
 - 4.FRONT SHELL: STAINLESS STEEL
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
 - Ni 50u" MIN. UNDER PLATED OVER ALL.
 - Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
 - (GOLD PLATING THICKNESS FOLLOW THE P/N)
 - PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
 - 2-2.FRONT SHELL:
 - Ni 30u" MIN. UNDER PLATED OVER ALL.
 - 2-3.SHIELD PLATE&EMI PLATE:
 - CLEAR ONLY
- 3.MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 0.5~2.0kgf.
 - 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4-1. CURRENT RATING:5.0A
VOLTAGE RATING:5.0V
 - 4-2. LLCR:
 - VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
 - SHIELD: 50mΩ/MAX.
 - LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - 4-3.INSULATION RESISTANCE: 100MΩ MIN
 - 4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25℃~+85℃.
- 6.IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

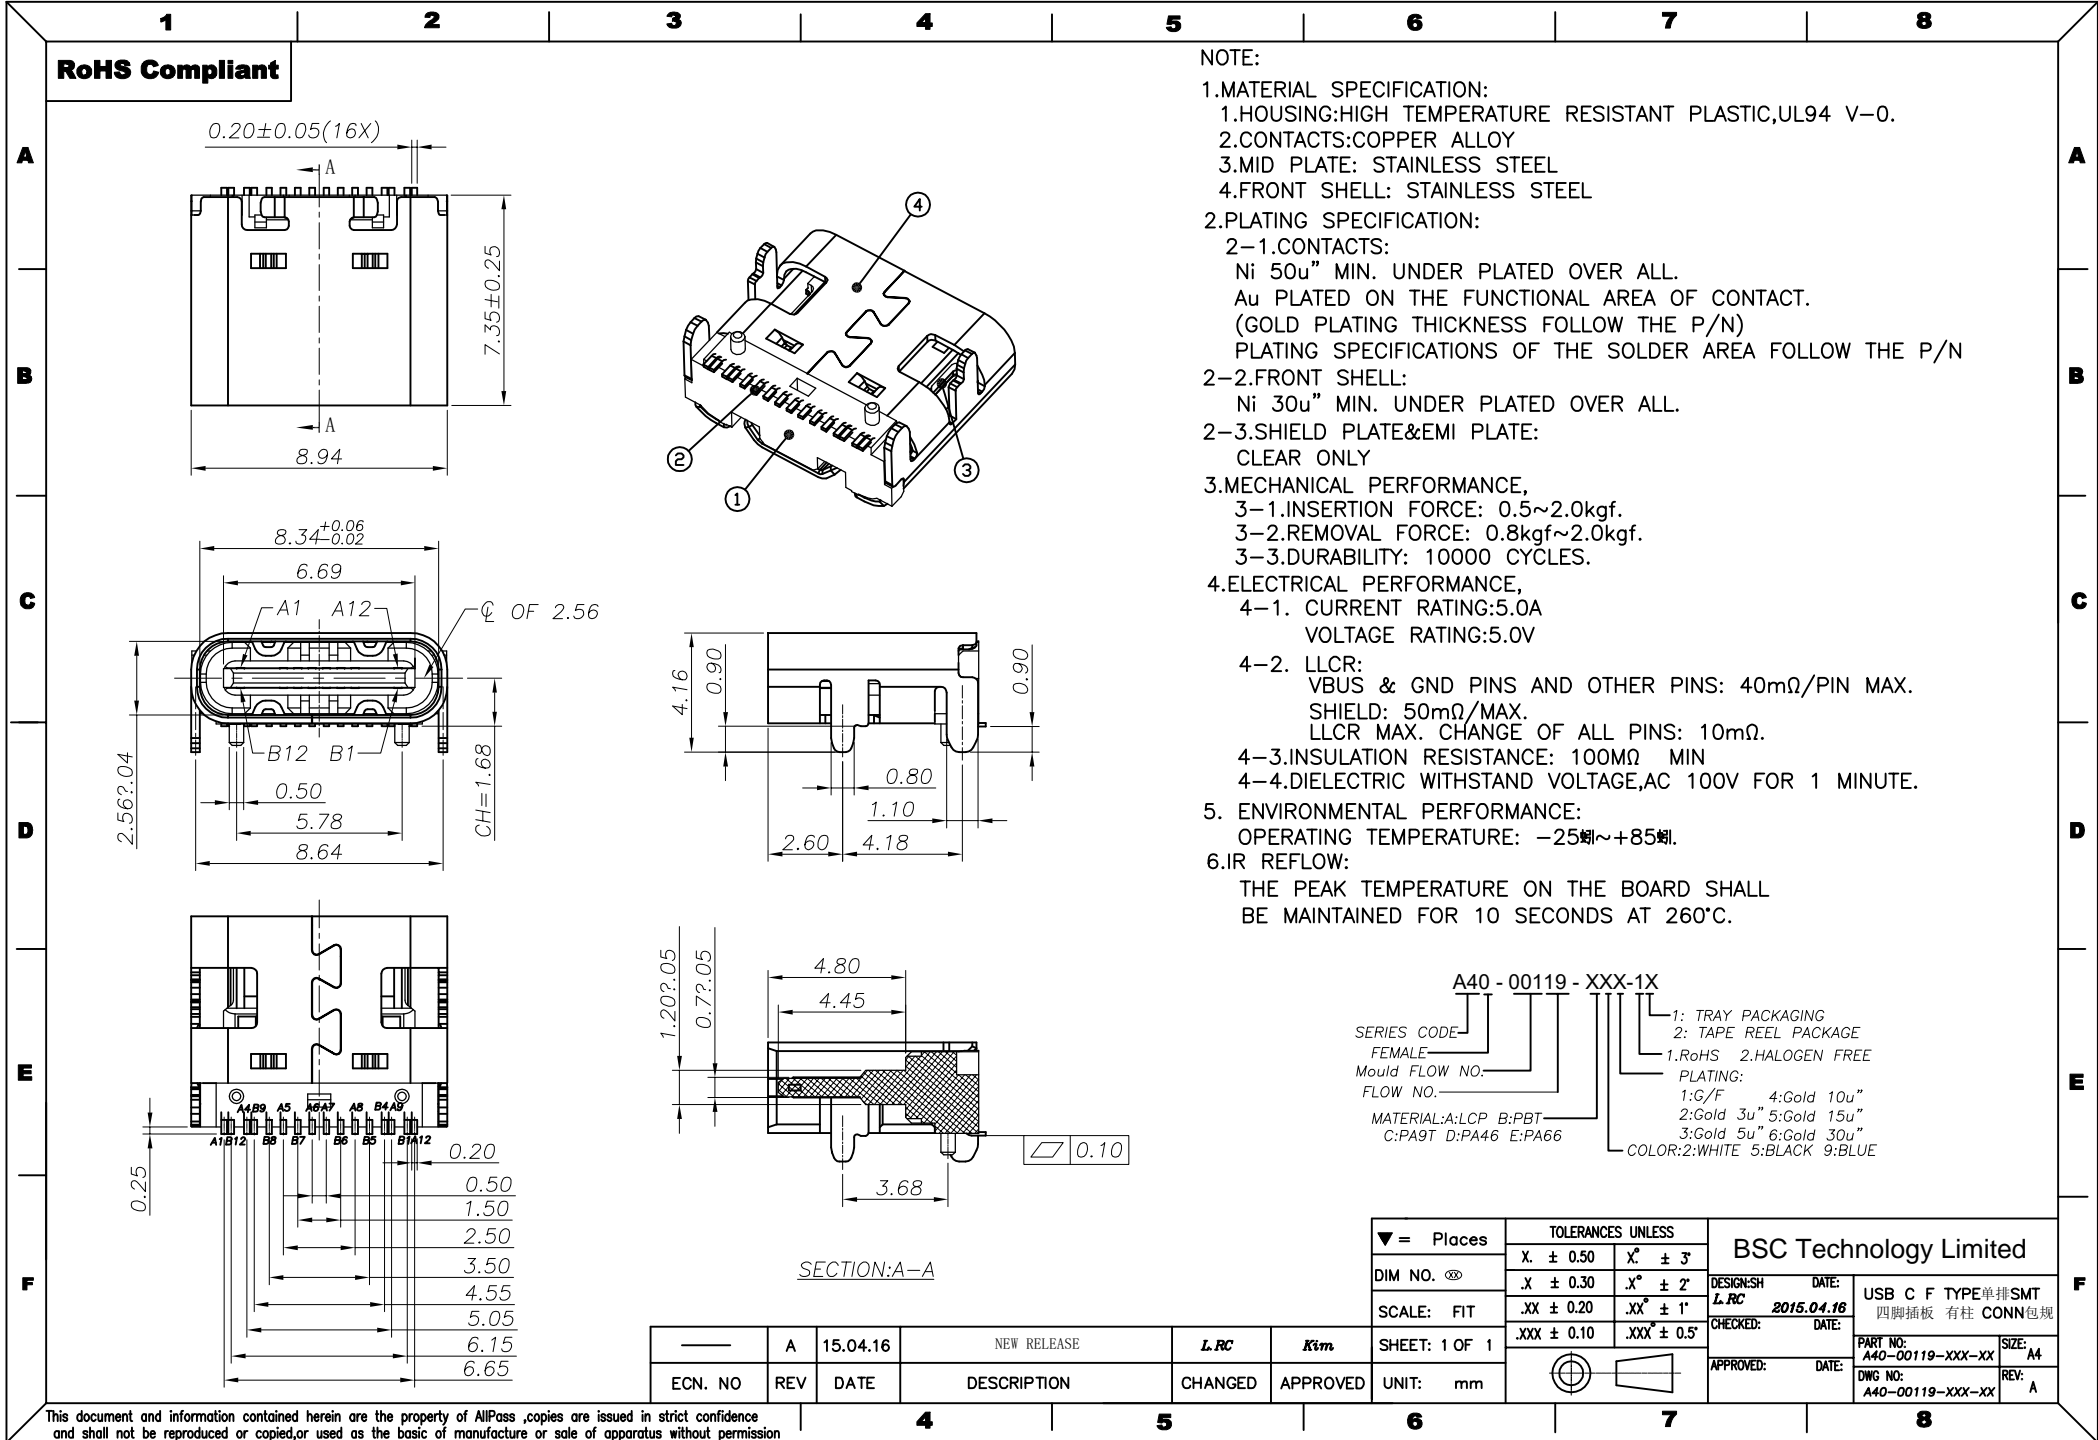

A40 - 00119 - XXX-1X

SERIES CODE: A40 - 00119 - XXX-1X
 FEMALE: FEMALE
 Mould FLOW NO.:
 FLOW NO.:
 MATERIAL: A:LCP B:PBT
 C:PA9T D:PA46 E:PA66


1: TRAY PACKAGING
 2: TAPE REEL PACKAGE
 1:RoHS 2:HALOGEN FREE
 PLATING:
 1:G/F 4:Gold 10u"
 2:Gold 3u" 5:Gold 15u"
 3:Gold 5u" 6:Gold 30u"
 COLOR:2:WHITE 5:BLACK 9:BLUE

SECTION:A-A

▽ = Places	TOLERANCES UNLESS		BSC Technology Limited	
	X. ± 0.50	X ^c ± 3'		
DIM NO. ⊗	.X ± 0.30	.X ^c ± 2'	DESIGN:SH	DATE:
SCALE: FIT	.XX ± 0.20	.XX ^b ± 1'	L.R.C	2015.04.18
	.XXX ± 0.10	.XXX ^b ± 0.5'	CHECKED:	DATE:
			APPROVED:	DATE:

ECN. NO	REV	DATE	DESCRIPTION	CHANGED	APPROVED	UNIT: mm
	A	15.04.16	NEW RELEASE	L.R.C	Ktm	SHEET: 1 OF 1


RoHS Compliant

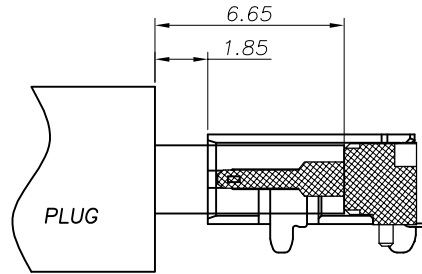

AFTER MATING

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

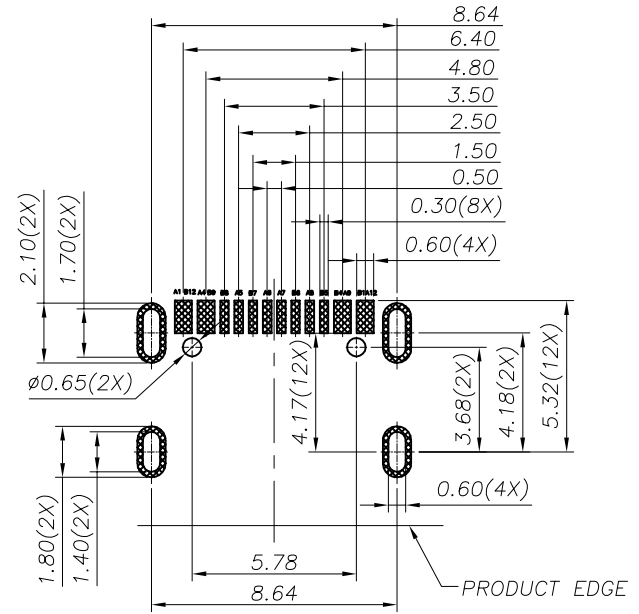

*RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05*

▼ = Places		TOLERANCES UNLESS		BSC Technology Limited	
DIM NO. ☉	X ± 0.50	X° ± 3'	DESIGN:SH	DATE:	USB C F TYPE单排SMT 四脚插板 有柱 CONN
SCALE: FIT	.X ± 0.30	.X° ± 2'	L.RC	2015.04.16	
SHEET: 1 OF 1	.XX ± 0.20	.XX° ± 1'	CHECKED:	DATE:	PART NO: A40-00119-XXX-XX
UNIT: mm	.XXX ± 0.10	.XXX° ± 0.5'	APPROVED:	DATE:	DWG NO: A40-00119-XXX-XX
					SIZE: A4
					REV: A

ECN. NO	REV	DATE	DESCRIPTION	CHANGED	APPROVED	UNIT: mm
—	A	15.04.16	NEW RELEASE	L.RC	Kim	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SparkFun Accessories](#) category:

Click to view products by [SparkFun](#) manufacturer:

Other Similar products are found below :

[DEV-17119](#) [SEN-16474](#) [COM-11450](#) [BOB-00495](#) [BOB-00497](#) [PRT-08619](#) [PRT-12702](#) [SEN-13582](#) [TOL-11468](#) [ROB-09065](#) [COM-12999](#)
[COM-12986](#) [COM-11120](#) [ROB-11965](#) [COM-11222](#) [PRT-12845](#) [CAB-13685](#) [PRT-10210](#) [PRT-14490](#) [TOL-10603](#) [COM-09278](#) [PRT-08023](#)
[COM-08033](#) [DEV-14052](#) [PRT-00111](#) [PRT-08432](#) [TOL-09317](#) [TOL-10997](#) [PRT-00743](#) [PRT-14492](#) [TOL-14228](#) [COM-13247](#) [PRT-11026](#)
[CAB-10646](#) [TOL-08964](#) [PRT-00116](#) [PRT-08506](#) [CAB-09741](#) [COM-10800](#) [SEN-14282](#) [DEV-14012](#) [CAB-14043](#) [COM-14452](#) [TOL-14508](#)
[DEV-13814](#) [GPS-00574](#) [PRT-14417](#) [PRT-08231](#) [COM-09939](#) [PRT-13839](#)