


DESCRIPTION

- Excellent Safe Operating Area
- DC Current Gain- $h_{FE}=20-70@I_C = 4A$
- Collector-Emitter Saturation Voltage-
: $V_{CE(sat)}= 1.1 V(Max)@ I_C = 4A$
- Complement to Type MJ2955

APPLICATIONS

- Designed for general-purpose switching and amplifier applications

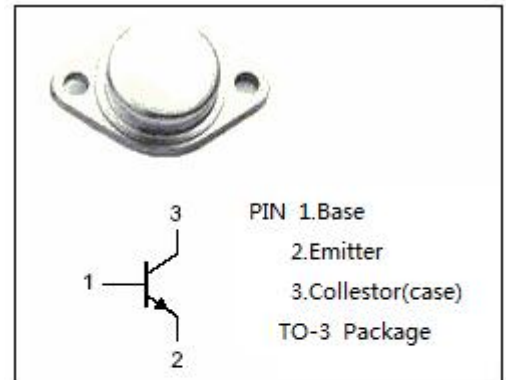


ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	100	V
V_{CER}	Collector-Emitter Voltage	70	V
V_{CEO}	Collector-Emitter Voltage	60	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current-Continuous	15	A
I_B	Base Current	7	A
P_C	Collector Power Dissipation@ $T_c=25^{\circ}C$	115	W
T_J, T_{stg}	Operating and Storage Junction Temperature Range	-65~+150	$^{\circ}C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance,Junction to Case	1.52	$^{\circ}C/W$

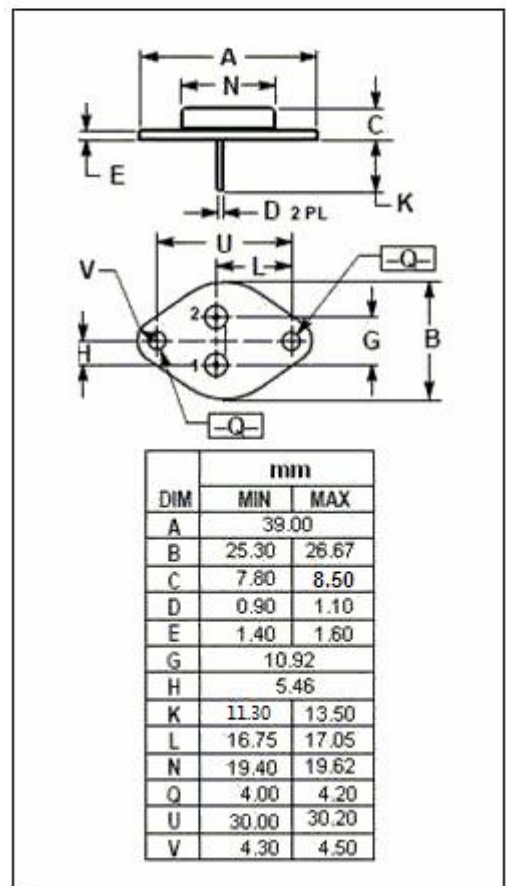

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CE0(sus)}$	Collector-Emitter Sustaining Voltage	$I_C=30\text{mA}$; $I_B=0$	60		V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C= 4\text{A}$; $I_B= 0.4\text{A}$		1.1	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C= 10\text{A}$; $I_B= 3.3\text{A}$		3.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C= 4\text{A}$; $V_{CE}= 4\text{V}$		1.5	V
I_{CEO}	Collector Cutoff Current	$V_{CE}= 30\text{V}$; $I_B=0$		0.7	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}= 7.0\text{V}$; $I_C=0$		5.0	mA
h_{FE-1}	DC Current Gain	$I_C= 4\text{A}$; $V_{CE}= 4\text{V}$	20	70	
h_{FE-2}	DC Current Gain	$I_C= 10\text{A}$; $V_{CE}= 4\text{V}$	5.0		
$I_{s/b}$	Second Breakdown Collector Current with Base Forward Biased	$V_{CE}= 40\text{V}$, $t= 1.0\text{s}$,Nonrepetitive	2.87		A
f_T	Current Gain-Bandwidth Product	$I_C= 0.5\text{A}$; $V_{CE}= 10\text{V}$; $f=1.0\text{MHz}$	2.5		MHz

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [SPTECH manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [C4460](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC2412KT146S](#) [2SD1816S-TL-E](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[MJE340](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJL0302DG](#) [2N3583](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#)